

**LSI® SAS 9201-16i PCI Express® to
6Gb/s Serial Attached SCSI (SAS)
Host Bus Adapter
User Guide**

Version 1.1
October 2014

DB15-000855-01

For a comprehensive list of changes to this document, see the [Revision History](#).

Corporate Headquarters	Email	Website
San Jose, CA 800-372-2447	globalsupport.pdl@avagotech.com	www.lsi.com

Avago Technologies, the A logo, LSI, Storage by LSI, and Fusion-MPT are trademarks of Avago Technologies in the United States and other countries. All other brand and product names may be trademarks of their respective companies.

Data subject to change. Copyright © 2011–2014 Avago Technologies. All Rights Reserved.

Table of Contents

1 Overview	4
2 HBA Features	4
3 Functional Descriptions	4
3.1 PCIe	4
3.2 SATA + SAS	5
4 Operating System Support	5
5 LSI SAS 9201-16i HBA Characteristics	5
5.1 Flash	5
5.2 Connectors	5
5.3 Physical Characteristics	6
6 Electrical and Environmental Specifications	7
6.1 Electrical Characteristics	7
6.2 Thermal and Atmospheric Characteristics	7
6.3 Safety Characteristics	7
7 Hardware Installation	7
8 Revision History	9
8.1 Version 1.1, October 2014	9
8.2 Version 1.0, August 2011	9

LSI SAS 9201-16i PCI Express to 6Gb/s SAS HBA User Guide

1 Overview

The LSI SAS 9201-16i PCI Express® (PCIe®)-to-Serial Attached SCSI (SAS) host bus adapter (HBA), hereinafter referred to as the LSI SAS 9201-16i HBA, provides high performance internal storage connectivity for servers and workstations. The LSI SAS 9201-16i HBA provides sixteen lanes of 6Gb/s SAS connectivity and eight lanes of PCIe 2.0 5Gb/s performance. The LSI SAS 9201-16i HBA is based on the Fusion-MPT™-architected LSI SAS 2116 controller that integrates the latest enhancements in PCIe 2.0 technology and 6Gb/s SAS technology.

The LSI SAS 9201-16i HBA has onboard Flash memory for the firmware and BIOS. The LSI SAS 9201-16i HBA also includes onboard DDR-2 SDRAM.

2 HBA Features

This section lists the LSI SAS 9201-16i HBA features.

- Implements one LSI SAS 2116 sixteen-port 6Gb/s to PCIe 2.0 controller
- Supports eight-lanes, full-duplex PCIe 2.0 performance
- Supports sixteen internal 6Gb/s SATA+SAS ports
- Supports SAS link rates of 1.5Gb/s, 3.0Gb/s, and 6.0Gb/s
- Provides four x4 internal mini-SAS connectors (SFF-8087)
- Supports DDR-2 speeds up to 800 MT/s
- Supports passive cable
- Supports up to 512 SATA or SAS end devices
- Provides one heartbeat LED and two activity LED headers
- Provides a universal asynchronous receiver/transmitter (UART) debug/diagnostic port

3 Functional Descriptions

3.1 PCIe

PCIe is a high-speed standard local bus for point-to-point interfacing of I/O components to the processor and the memory subsystems in a high-end personal computer (PC). The LSI SAS 2116 controller chip contains the PCIe functionality for the LSI SAS 9201-16i HBA. The LSI SAS 2116 controller chip connects directly to the PCIe bus and generates timing and protocol in compliance with the PCIe specifications.

The LSI SAS 2116 controller chip JTAG signals are not connected to the corresponding signals in the PCIe connector. The following table shows the LSI SAS 9201-16i HBA 5Gb/s PCIe performance.

Table 1 PCIe Aggregate Bandwidth

Lanes	Single Direction	Dual Direction
Single-lane (x1)	5Gb/s	10Gb/s
Quad-lane (x4)	20Gb/s	40Gb/s
Eight-lane (x8)	40Gb/s	80Gb/s

3.2 SATA + SAS

The LSI SAS 2116 controller chip contains the SATA + SAS functionality for the LSI SAS 9201-16i HBA. The following table shows the LSI SAS 9201-16i HBA 6 Gb/s SAS performance.

Table 2 6Gb/s SAS Bandwidths

Half Duplex	Full Duplex
Narrow port (one lane), 600MB/s	Narrow port (one lane), 1200MB/s
Wide port (four lanes), 2400MB/s	Wide port (four lanes), 4800MB/s

4 Operating System Support

The LSI SAS 9201-16i HBA supports all major operating systems: Windows®, Linux® Red Hat®, Linux SUSE® Enterprise Server (SLES), Solaris™, VMware®, and FreeBSD®. Refer to <http://go.lsi.com/hbas> for details on the software versions and device driver support. For Solaris support, contact the LSI® Technical Support team.

5 LSI SAS 9201-16i HBA Characteristics

5.1 Flash

The LSI SAS 9201-16i HBA has onboard Flash ROM for the firmware and BIOS. The LSI SAS 9201-16i HBA provides one 4 M x 16-bit Flash ROM for storing the firmware and the BIOS.

5.2 Connectors

This section describes the different connectors on the LSI SAS 9201-16i HBA. See [Figure 1](#) for connector locations.

PCIe Connector (EC1). The LSI SAS 9201-16i HBA supports a x8 interface. The PCIe connection is through the edge connector, EC1, which provides connections on both the top (EC1B) and bottom (EC1A) of the board. The signal definitions and pin numbers conform to the PCIe specification.

SAS Connectors (J6, J7, J8, and J9). The LSI SAS 9201-16i HBA supports SAS connections through four connectors which are SFF-8087 mini-SAS, internal, right-angle connectors.

Activity LED Header (J4 and J5). The LSI SAS 9201-16i HBA has two 4-pin, right-angle, 0.1-in. pitch headers for driving external activity LEDs. The LEDs on header J4 correspond to activity on Port C and Port D. Header J5 corresponds to activity on Port A and Port B.

Table 3 LSI SAS 9201-16i LED Header Pinout

Pin	J4 Header Function	J5 Header Function
1	3.3 V	3.3 V
2	Port C	Port A
3	Port D	Port B
4	3.3 V	3.3 V

UART Connector (J1). The UART connector debug port requires a special cable and LSI support to gather detailed Input/Output Controller (IOC) status.


Table 4 LSI SAS 9201-16i UART Pinout

Pin	Function
1	UART_TX
2	Gnd
3	UART_RX
4	3.3 V

5.3 Physical Characteristics

The LSI SAS 9201-16i HBA is a 6.6-in. x 4.2-in. board. The component height on the top and bottom of the LSI SAS 9201-16i HBA is in accordance with the PCIe specification. The following figure shows the board connectors.

Figure 1 LSI SAS 9201-16i Board Layout

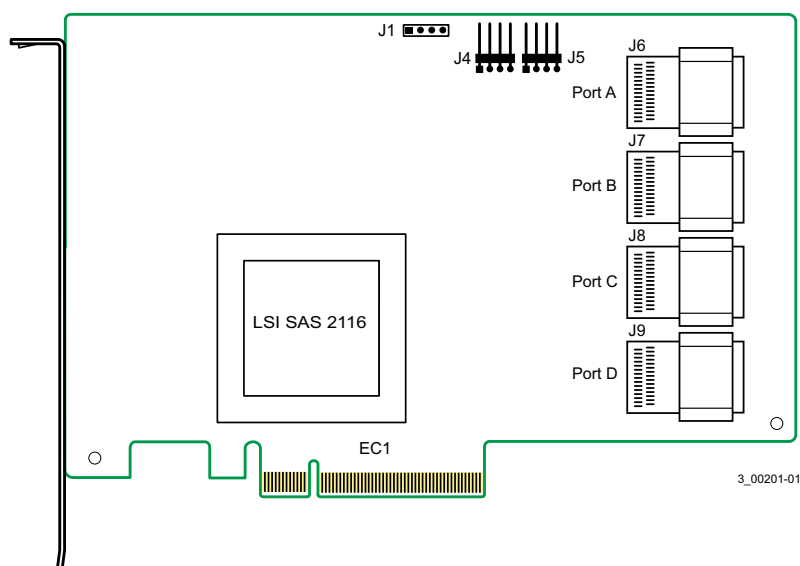

- EC1: PCIe x8-lane board edge connector
- J1: UART connection

- J4 and J5: 4-pin, right angle, 0.1-in. pitch, pin header for driving external activity LED
- J6, J7, J8, and J9: SFF-8087 mini-SAS, internal, right-angle connectors

6 Electrical and Environmental Specifications

The design and implementation of the LSI SAS 9201-16i HBA minimizes electromagnetic emissions, susceptibility to radio frequency energy, and the effects of electrostatic discharge. The board carries the CE mark, C-Tick mark, Canadian Compliance Statement, Korean KCC, Taiwan BSMI, Japan VCCI, and FCC Class B, and is marked with the FCC Self-Certification logo. The board also meets the requirements of CISPR Class B.

6.1 Electrical Characteristics

The maximum power requirements for the LSI SAS 9201-16i HBA under normal operation are as follows:

- PCIe 12.0 V = 2.08 A
- Power
 - Nominal = 12.92 W
 - Worst case = 24.94 W
- Operation range = 0 °C to 55 °C (32 °F to 131 °F)

6.2 Thermal and Atmospheric Characteristics

The atmospheric characteristics for the LSI SAS 9201-16i HBA are as follows:

- Temperature range: 0 °C to 55 °C (32 °F to 131 °F) (dry bulb)
- Relative humidity range: 5 percent to 90 percent noncondensing
- Maximum dew point temperature: 32 °C (89.6 °F)

The following parameters define the storage and transit environment for the LSI SAS 9201-16i HBA:

- Temperature range: –45 °C to +105 °C (–49 °F to +221 °F) (dry bulb)
- Relative humidity range: 5 percent to 90 percent noncondensing

6.3 Safety Characteristics

All LSI SAS 9201-16i HBAs meet or exceed the requirements of UL flammability rating 94V-0. Each bare board is marked with the supplier's name or trademark, type, and UL flammability rating. Because these boards are installed in a PCIe bus slot, all voltages are less than the SELV 42.4-V limit.

7 Hardware Installation

Detailed installation instructions for the LSI SAS 9201-16i HBA follow.

1. **Unpack the HBA, and inspect it for damage.** Unpack the HBA in a static-free environment. Remove the HBA from the antistatic bag and carefully inspect it for damage. If you notice any damage, or if any component is missing, contact LSI or your reseller support representative.


ATTENTION Make a backup of your data before changing your system configuration or you might risk data loss.

2. **Prepare the computer.** Turn off the computer, and disconnect the power cord from the rear of the power supply.
3. **Remove the cover from the chassis.**

CAUTION Disconnect the computer from the power supply and from any networks before you install the HBA, or you risk damaging the system.

4. **Insert the HBA in an available PCIe slot.** Locate an empty PCIe slot. Remove the blank bracket panel on the back of the computer that aligns with the empty PCIe slot. Save the bracket screw, if applicable.
Align the HBA to the PCIe slot. Press down gently, but firmly, to properly seat the HBA in the slot. The following figure shows how to insert the HBA in a PCIe slot.

Figure 2 Installing an LSI SAS 9201-16i HBA in a PCI Express Slot

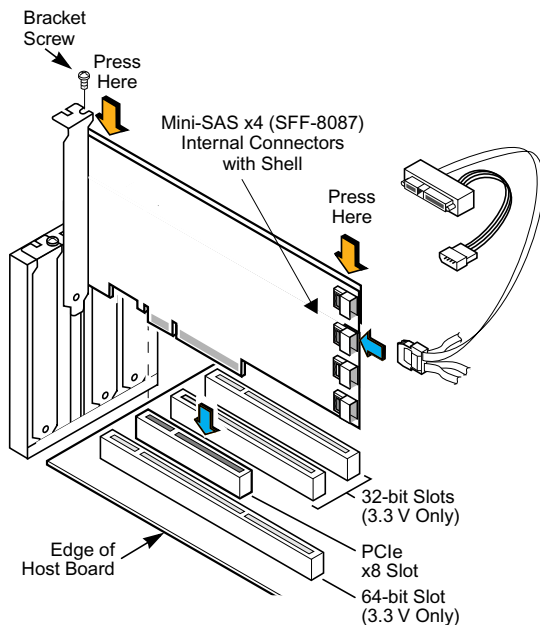

NOTE The shape, size, and locations of components on your HBA and its bracket might vary from this illustration. The LSI SAS 9201-16i HBA requires a x8 PCIe slot.

5. **Secure the bracket to the system's chassis.** Install the bracket screw, if applicable, or engage the system retention mechanism to secure the HBA to the system's chassis.
6. **Connect serial cables between the HBA and any serial HDDs.** Figure 1 shows the locations of the HBA connectors.
7. **Replace the cover and any power cords and power up the system.** Replace the chassis's cover, reconnect any power cords, and reconnect any network cables. Turn on the power.

The hardware installation of your LSI SAS 9201-16i HBA is complete.

8 Revision History

8.1 Version 1.1, October 2014

Made the following changes:

- Updated Operating System Support URL.
- Converted the book to the new template.

8.2 Version 1.0, August 2011

Initial release of the document.

