



SilkWorm 2XXE Recycling Instruction

August 14, 2006


Models:	BR-210E-0000	BR-210E-R0000
	BR-210E-0001	BR-210E-R0001
	BR-220E-0000	BR-220E-R0000
	BR-220E-0001	BR-220E-R0001
	BR-240E-0000	BR-240E-R0000
	BR-240E-0001	BR-240E-R0001
	BR-205E-0001	BR-205E-R0001
	BR-207E-0000	BR-207E-R0000
	BR-207E-0001	BR-207E-R0001
	BR-206E-R0001	XBR-206E-R0000
	XBR-205E-0000	XBR-205E-R0000
	XBR-207E-0000	XBR-207E-R0000
	XBR-210E-0000	XBR-210E-R0000
	XBR-220E-0000	XBR-220E-R0000
	XBR-240E-0000	XBR-240E-R0000

Dismantling the SilkWorm 2XXE



Remove the chassis to access the motherboard/PCBA.

Dismantling the SW2XXE Motherboard (PCBA)

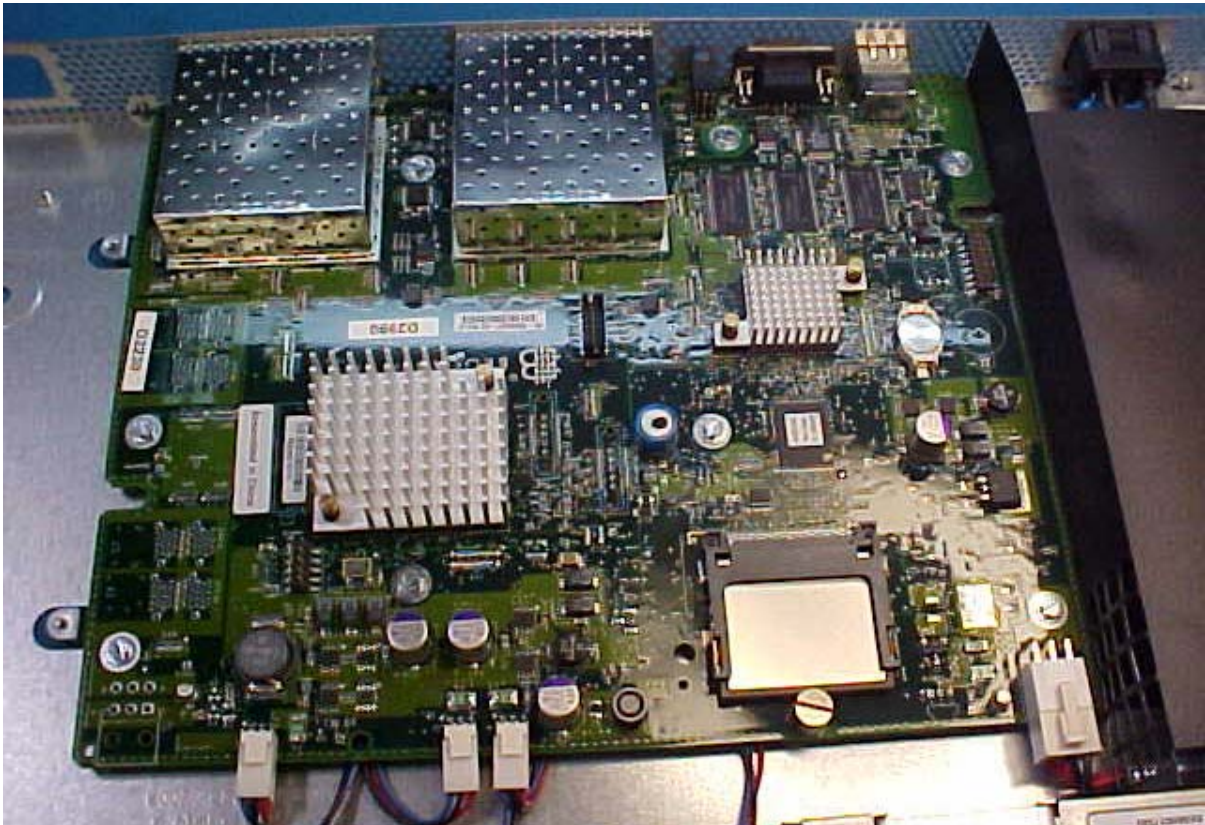

WEEE Items for Removal

1. Battery: Board location XB2.
2. Compact flash: Board location CF1
Remove the screw in front of the compact flash. Can be resold.
3. ASICs: Board location U7
Remove the heat sinks covering the ASICs. Destroy the ASICs.

The components that contain Brominated Flame Retardants are on the board in the following locations:

Y2, L4, L3, L2, L5, L1, D5, D4, D6-D7, D10, D9, D16, D3, D15, D8, U31, U4, U12, U15, U17, U47, U43, U3, U39, U9, U29, U5, U46, U16, U27, U40, U21, U30, U35, U41, U23, U14, U18-U20, U49-U50, U7, U26, U28, U42, U44, Q13, Q32, U34, U24, U36, Q1, Q3, Q12, Q6, Q8, Q11, Q9, Q10, Q14, Q26-Q27, Q33-Q34, Q24, Q23, Q4, Q25, Q29-Q31, Q35, Q15-Q22, Q28, U48

For all other items, follow your normal recycling process.