

AFBR-S4KTIA33XXB Series

SiPM Evaluation Kit, with 3 x 3 mm² WB-Type, 15- μ m and 25- μ m SPAD Pitch



Description

The Broadcom[®] AFBR-S4KTIA33XXB is a single silicon photomultipliers (SiPM) module with an integrated transimpedance amplifier and bias source. It can be used for a wide range of applications which require single-photon counting or measurements with scintillators.

Features

- AFBR-S4K33C0115B or AFBR-S4K33C0125B SiPM based
- Integrated Transimpedance Amplifier (TIA)
- Integrated Controllable Bias Source for SiPM
- Optionally with integrated Gain Stabilization
- Plug and Play Solution to replace PMTs
- Compatible with Thorlabs SM05 Optics, 16 mm
- Optical Cage Systems, Hamamatsu PMT mounts

Applications

- Biophotonics
 - Cytometry
 - Fluorescence Measurements
 - Point-of-Care Diagnostics
- Hazard and Threat Detection
 - Single Photon Counting
 - Scintillator Readout
 - Handheld Devices
- High Energy Physics
 - Low Light Level Detection
 - High Linearity Measurements
 - Energy Measurements

NOTE: All values in this data sheet are typical values if not marked with min., max., <, or >.

General Parameters and Ordering Information

Type	Active Area of SiPM Pixel [mm ²]	Microcell Size of SiPM Pixel [μ m]	No. of Microcells	Gain stabilized vs. Temperature
AFBR-S4K33TIA3315B based on AFBR-S4K33C0115B SiPM	3.0 x 3.0	15	38800	No
AFBR-S4K33TIA3325B based on AFBR-S4K33C0125B SiPM	3.0 x 3.0	25	13920	No

Recommended Operation Parameters

Parameter	Description
Ctrl Voltage: AFBR-S4KTIA3315B AFBR-S4KTIA3325B	0.7V (resulting SiPM over voltage of about 5V)
Operating Temperature	0°C to 60°C

Electrical and Optical Characteristics at 21°C (typ.)

Module Type ^a	Photo Detection Efficiency [%]	Dark Count Rate [kHz/mm ²]	Crosstalk Probability [%]	Afterpulsing Probability [%]	Recovery Time [ns]
AFBR-S4KTIA3315B @ Ctrl = 0.7V	31 (@ 430 nm)	125	18	5	15
AFBR-S4KTIA3325B @ Ctrl = 0.7V	45 (@ 430 nm)	125	26	<1	35

a. A Full SiPM specification can be found in the corresponding SiPM data sheet, visit <https://www.broadcom.com/products/optical-sensors/silicon-photomultiplier-sipm>

Interfaces and Electrical Ratings

Parameter	Description
Outer Dimensions	40.0 x 50.0 x 19.8 mm ³ (L x W x H)
Mechanical Compatibility	Thorlabs SM05 Optics and 16 mm cage system Hamamatsu PMT mounts
Power Supply Input	+5V DC (\pm 0.5V, max + 12V DC), 500 mA, MCX connector Recommended ripple noise < 10 mV
Typical Power Consumption	350 mW (69 mA @ 5V power supply)
Bias Voltage / Gain Control (Ctrl)	0V to +1V (min. -0.2V, max. +1.2V), 50 mA, MCX connector
Signal Output (Signal)	Output range 0V to +1V, positive polarity MCX connector matched to 50 Ω impedance
Max. recommended Cable Length	3m

Electrical Characteristics of Signal Output

Parameter	Description
Transimpedance Amplifier Gain	2-stage design, total gain 150 V/A
Signal Output Bandwidth	12.5 MHz
Signal Output Amplitude Noise	500 μV (σ, AC coupled, 20 MHz bandwidth)
Bias Voltage/Gain Control (Ctrl)	0V to +1V, 50 mA, MCX connector
Output Offset Tuning Range	Preset to 0V, upon request -1V to 0V
Output Offset Drift with Temperature	< 0.5 mV/K

Electrical Characteristics of Internal SiPM Bias Supply

Parameter	Description
Bias Voltage Range AFBR-S4KTIA3315B	26.81V to 34.00V (SiPM V _{bd} at typ. 26.9V @ 21°C, no internal SiPM amplification below V _{bd})
Bias Voltage Range AFBR-S4KTIA3325B	24.69V to 31.55V (SiPM V _{bd} at typ. 24.7V @ 21°C, no internal SiPM amplification below V _{bd})
Ripple Noise	< 2 mV min-max (1 MΩ input resistance, 22 pF capacitive load, 0.5 m RG-174-U cable)
Stability	< 5 mV min-max (f = 0.1 Hz)
Input Impedance	400 kΩ
Settling Time	0.5s (time to reach stable SiPM bias after change of Ctrl voltage)
Output Current Limit	10 mA

Typical Performance Characteristics

Figure 1: SiPM Bias Voltage vs. Ctrl Voltage

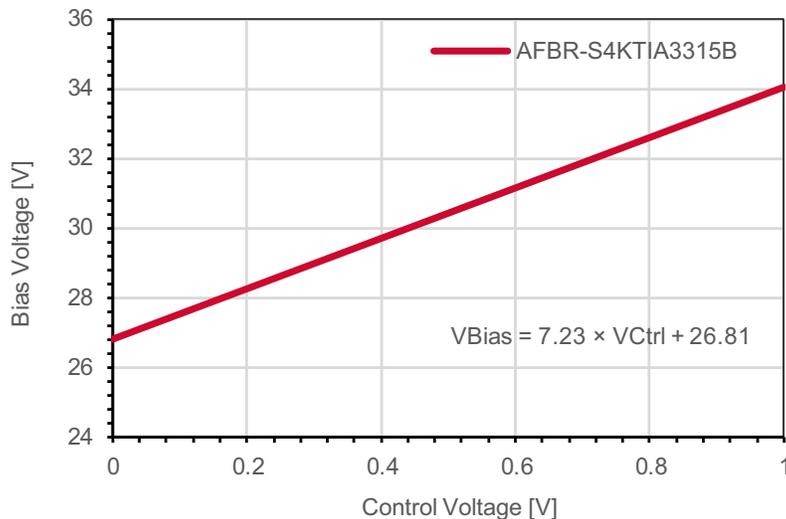


Figure 2: SiPM Bias Voltage vs. Ctrl Voltage



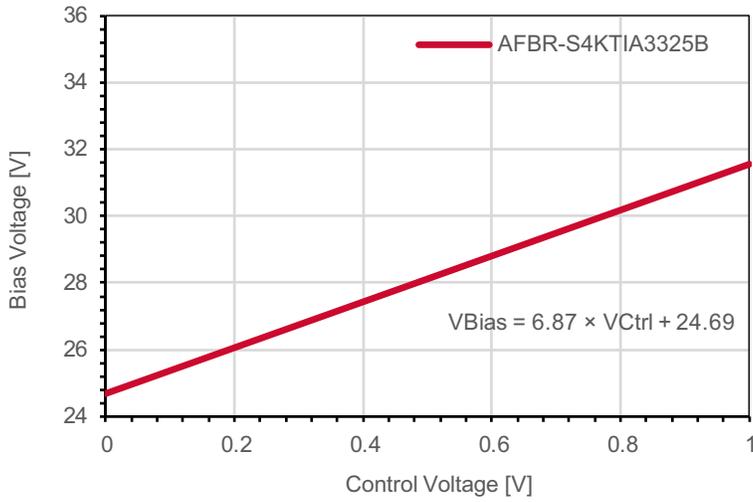


Figure 3: Single Photon Spectrum Example

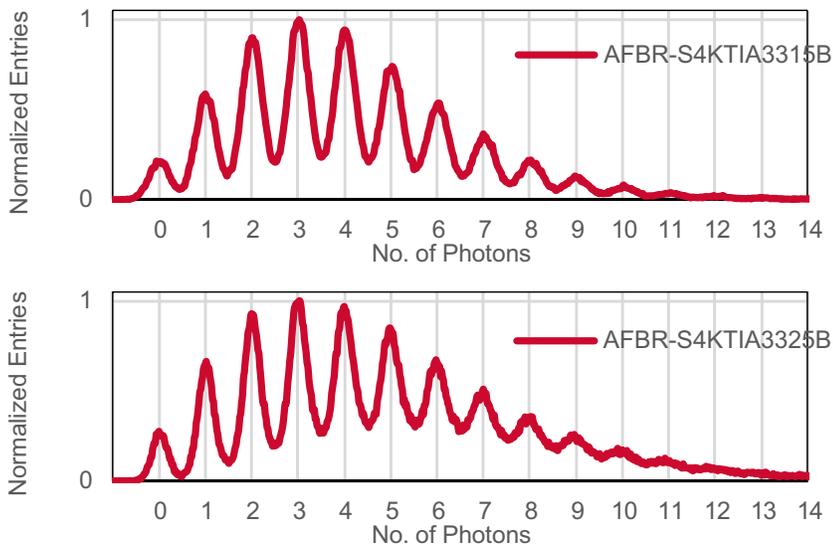

Mechanical Specifications¹

Figure 4: Mechanical Specifications

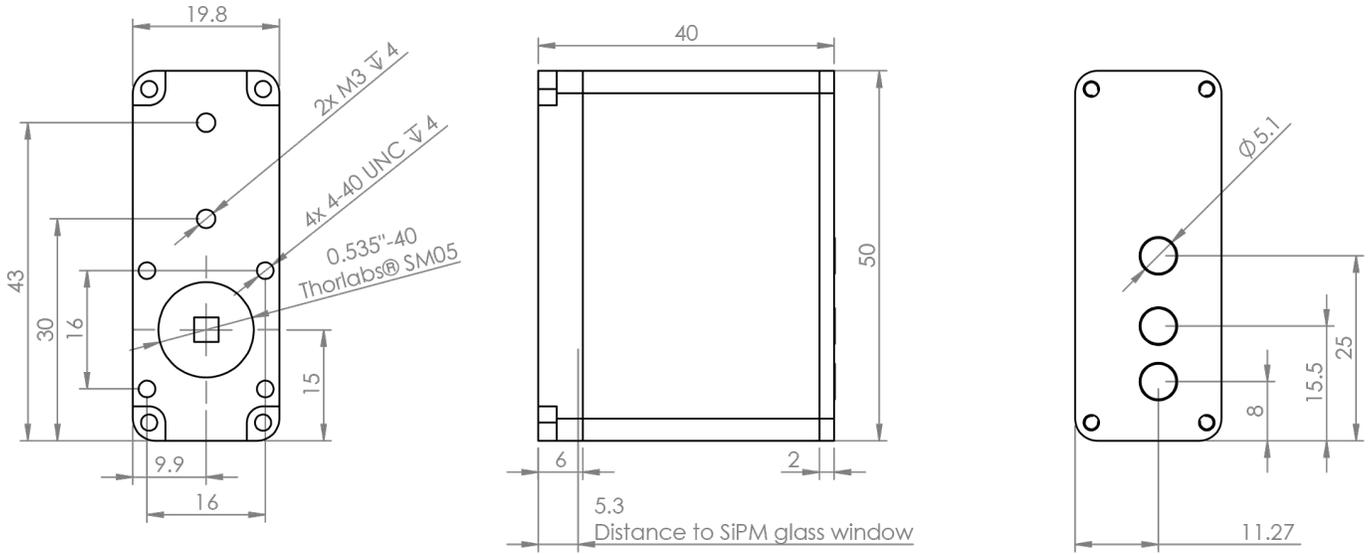

1. General tolerances ± 0.1 mm unless otherwise noted

Copyright © 2022 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

