

ASM6-Sxxx-xxxxH

3W 3535 Surface-Mount LED



Description

The Broadcom[®] ASM6 LED series, an expansion of the earlier ASM3 series, are the latest high-power LEDs development edition. While maintaining a similar 3535 footprint, the ASM6 series exhibits higher lumen output and displays a better cost per lumen ratio. This new ASM6 family is energy efficient and adapts good heat sink properties. It is also superior in package robustness and has better product longevity with its silicone encapsulation.

Features


- High reliability package with enhanced silicone resin encapsulation
- Available in Far Red, Deep Red, Red, Royal Blue, Blue, and Green
- Available in 90° and 130° viewing angles
- Compatible with reflow soldering processes
- JEDEC MSL 1

Applications

- Horticulture lighting
- Commercial lighting
- Architecture lighting
- Specialty lighting

CAUTION! This LED is ESD sensitive. Please observe appropriate precautions during handling and processing. For additional details, refer to Application Note 1142, *Premium InGaN LEDs: Safety Handling Fundamentals ESD*.

Figure 1: Package Drawing

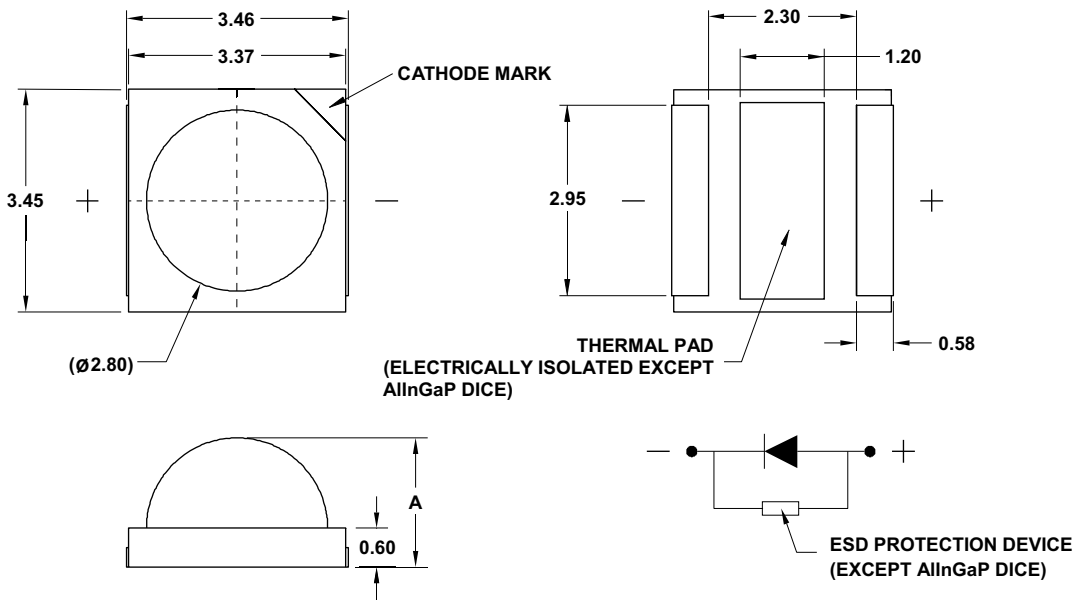

| Part Number | Dimension A (mm) |
|-----------------|------------------|
| ASM6-SxDx-xxxxH | 1.90 |
| ASM6-Sx9x-xxxxH | 2.50 |

NOTE:

1. All dimensions are in millimeters (mm).
2. Tolerance is ± 0.20 mm unless otherwise specified.
3. Thermal pad is connected to anode for AllnGaP dice.
4. Encapsulation = silicone.
5. Terminal finish = silver plating.
6. Dimensions in parentheses are for reference only.

Device Selection Guide ($T_J = 25^\circ\text{C}$, $I_F = 350\text{ mA}$)

| Part Number | Color | Viewing Angle, $2\theta_{1/2}$ ($^\circ$) ^a | Radiant Flux, Φ_e (mW) ^{b, c} | | | PPF, Φ_P ($\mu\text{mol/s}$) ^{d, e} | PPF/W ($\mu\text{mol/J}$) | Dice Technology |
|-----------------|------------|--|---|-------|-------|---|-----------------------------|-----------------|
| | | Typ. | Min. | Typ. | Max. | Typ. | Typ. | |
| ASM6-S390-ANQ0H | Far Red | 90 | 330.0 | 350.0 | 480.0 | 2.11 ^f | 2.87 | AllnGaP |
| ASM6-SD90-AQR0H | Deep Red | 90 | 430.0 | 450.0 | 530.0 | 2.44 | 3.32 | AllnGaP |
| ASM6-SD91-AQS0H | Deep Red | 90 | 430.0 | 500.0 | 600.0 | 2.82 | 3.84 | AllnGaP |
| ASM6-SL91-NST0H | Royal Blue | 90 | 530.0 | 580.0 | 705.0 | 2.18 | 2.15 | InGaN |
| ASM6-S3D0-ANQ0H | Far Red | 130 | 330.0 | 350.0 | 480.0 | 2.11 ^f | 2.87 | AllnGaP |
| ASM6-SDD0-AQR0H | Deep Red | 130 | 430.0 | 450.0 | 530.0 | 2.44 | 3.32 | AllnGaP |
| ASM6-SDD1-AQS0H | Deep Red | 130 | 430.0 | 500.0 | 600.0 | 2.82 | 3.84 | AllnGaP |
| ASM6-SLD1-NST0H | Royal Blue | 130 | 530.0 | 580.0 | 705.0 | 2.18 | 2.15 | InGaN |

| Part Number | Color | Viewing Angle, $2\theta_{1/2}$ ($^\circ$) ^a | Luminous Flux, Φ_v (lm) ^{b, c} | | | PPF, Φ_P ($\mu\text{mol/s}$) ^{d, e} | PPF/W ($\mu\text{mol/J}$) | Dice Technology |
|-----------------|-------|--|--|-------|-------|---|-----------------------------|-----------------|
| | | Typ. | Min. | Typ. | Max. | Typ. | Typ. | |
| ASM6-SR90-AHK0H | Red | 90 | 50.0 | 62.0 | 78.0 | 1.45 | 1.88 | AllnGaP |
| ASM6-SR91-AKM0H | Red | 90 | 67.3 | 75.0 | 105.0 | 1.97 | 2.73 | AllnGaP |
| ASM6-SB93-NGJ0H | Blue | 90 | 39.1 | 45.0 | 67.3 | 1.85 | 1.82 | InGaN |
| ASM6-SG91-NPS0H | Green | 90 | 115.0 | 125.0 | 169.0 | 1.14 | 1.12 | InGaN |
| ASM6-SRD0-AHK0H | Red | 130 | 50.0 | 62.0 | 78.0 | 1.45 | 1.88 | AllnGaP |
| ASM6-SRD1-AKM0H | Red | 130 | 67.3 | 75.0 | 105.0 | 1.97 | 2.73 | AllnGaP |
| ASM6-SBD3-NGJ0H | Blue | 130 | 39.1 | 45.0 | 67.3 | 1.85 | 1.82 | InGaN |
| ASM6-SGD1-NPS0H | Green | 130 | 115.0 | 125.0 | 169.0 | 1.14 | 1.12 | InGaN |

- $\theta_{1/2}$ is the off-axis angle where the luminous intensity is half of the peak intensity.
- Radiant flux, Φ_e , / luminous flux, Φ_v , is the total output measured with an integrating sphere at a single current pulse condition.
- Radiant flux, Φ_e , / luminous flux, Φ_v , tolerance is $\pm 10\%$.
- Photosynthetic photon flux (PPF), Φ_P , is the measurement of the photosynthetically active radiation (PAR) ranging from 400 nm to 700 nm.
- Values are calculated and for reference only.
- Plant biologically active radiation flux (PBAR) for Far Red is measured from 280 nm to 800 nm.

Absolute Maximum Ratings

| Parameter | Royal Blue, Blue, and Green | Deep Red and Far Red | Red (ASM6-SRx1) | Red (ASM6-SRx0) | Units |
|-----------------------------------|---|----------------------|-----------------|-----------------|-------|
| DC Forward Current ^a | 1000 | 1000 | 1000 | 700 | mA |
| Peak Forward Current ^b | 2000 | 2000 | 2000 | 2000 | mA |
| Power Dissipation | 3400 | 2600 | 1960 | 1960 | mW |
| Reverse Voltage | Not designed for reverse bias operation | | | | |
| LED Junction Temperature | 125 | 125 | 125 | 125 | °C |
| Operating Temperature Range | -40 to +120 | -40 to +120 | -40 to +120 | -40 to +120 | °C |
| Storage Temperature Range | -40 to +120 | -40 to +120 | -40 to +120 | -40 to +120 | °C |

a. Derate linearly as shown in Figures 22, 23, 24, 25, 26, and 27.

b. Duty factor = 10%, frequency = 1 kHz.

Optical and Electrical Characteristics (T_J = 25°C, I_F = 350 mA)

| Color | Peak Wavelength, λ_p (nm) | | | Forward Voltage, V _F (V) ^a | | | Thermal Resistance, R _{θJ-S} (°C/W) ^b |
|------------|-----------------------------------|------|------|--|------|------|---|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | Typ. |
| Far Red | 720 | 735 | 745 | 1.8 | 2.1 | 2.6 | 3 |
| Deep Red | 650 | 655 | 670 | 1.8 | 2.1 | 2.6 | 3 |
| Royal Blue | 440 | 450 | 460 | 2.6 | 2.9 | 3.4 | 3 |

| Color | Dominant Wavelength, λ_d (nm) | | | Forward Voltage, V _F (V) ^a | | | Thermal Resistance, R _{θJ-S} (°C/W) ^b |
|-------|---------------------------------------|------|------|--|------|------|---|
| | Min. | Typ. | Max. | Min. | Typ. | Max. | Typ. |
| Red | 617 | 625 | 635 | 1.8 | 2.2 | 2.8 | 4 |
| Blue | 460 | 470 | 485 | 2.6 | 2.9 | 3.4 | 4 |
| Green | 515 | 525 | 535 | 2.6 | 2.9 | 3.4 | 6 |

a. Forward voltage, V_F, tolerance is ± 0.1V.

b. Thermal resistance from the LED junction to the solder point.

Performance Characteristics ($T_J = 25^\circ\text{C}$, $I_F = 700\text{ mA}$)

| Part Number | Color | Viewing Angle, $2\theta_{1/2}$ (°) | Radiant Flux, Φ_e (mW) | PPF, Φ_p ($\mu\text{mol/s}$) | Forward Voltage, V_F (V) |
|-----------------|------------|---------------------------------------|--------------------------------|--|-------------------------------|
| | | Typ. | Typ. | Typ. | Typ. |
| ASM6-S390-ANQ0H | Far Red | 90 | 693 | 4.18 | 2.4 |
| ASM6-SD90-AQR0H | Deep Red | 90 | 891 | 4.83 | 2.5 |
| ASM6-SD91-AQS0H | Deep Red | 90 | 945 | 5.33 | 2.3 |
| ASM6-SL91-NST0H | Royal Blue | 90 | 1148 | 4.32 | 3.2 |
| ASM6-S3D0-ANQ0H | Far Red | 130 | 693 | 4.18 | 2.4 |
| ASM6-SDD0-AQR0H | Deep Red | 130 | 891 | 4.83 | 2.5 |
| ASM6-SDD1-AQS0H | Deep Red | 130 | 945 | 5.33 | 2.3 |
| ASM6-SLD1-NST0H | Royal Blue | 130 | 1148 | 4.32 | 3.2 |

| Part Number | Color | Viewing Angle, $2\theta_{1/2}$ (°) | Luminous Flux, Φ_v (lm) | PPF, Φ_p ($\mu\text{mol/s}$) | Forward Voltage, V_F (V) |
|-----------------|-------|---------------------------------------|---------------------------------|--|-------------------------------|
| | | Typ. | Typ. | Typ. | Typ. |
| ASM6-SR90-AHK0H | Red | 90 | 111 | 2.60 | 2.5 |
| ASM6-SR91-AKM0H | Red | 90 | 133 | 3.72 | 2.5 |
| ASM6-SB93-NGJ0H | Blue | 90 | 76 | 3.11 | 3.2 |
| ASM6-SG91-NPS0H | Green | 90 | 199 | 1.82 | 3.3 |
| ASM6-SRD0-AHK0H | Red | 130 | 111 | 2.60 | 2.5 |
| ASM6-SRD1-AKM0H | Red | 130 | 133 | 3.72 | 2.5 |
| ASM6-SBD3-NGJ0H | Blue | 130 | 76 | 3.11 | 3.2 |
| ASM6-SGD1-NPS0H | Green | 130 | 199 | 1.82 | 3.3 |

Part Numbering System

A S M 6 - S

| | | |
|----------------|----------------|----------------|
| x ₁ | x ₂ | x ₃ |
|----------------|----------------|----------------|

 -

| | | | | |
|----------------|----------------|----------------|----------------|----------------|
| x ₄ | x ₅ | x ₆ | x ₇ | x ₈ |
|----------------|----------------|----------------|----------------|----------------|

| Code | Description | Option | |
|----------------|------------------|--|-----------------------|
| x ₁ | Color | 3 | Far Red |
| | | D | Deep Red |
| | | G | Green |
| | | B | Blue |
| | | L | Royal Blue |
| | | R | Red |
| x ₂ | Viewing Angle | D | 130° |
| | | 9 | 90° |
| x ₃ | Internal Code | | |
| x ₄ | Dice Technology | A | AllnGaP |
| | | N | InGaN |
| x ₅ | Minimum Flux Bin | See Luminous Flux Bin Limits (CAT) and Radiant Flux Bin Limits (CAT) . | |
| x ₆ | Maximum Flux Bin | | |
| x ₇ | Color Bin Option | 0 | Full Distribution |
| x ₈ | Test Option | H | Test Current = 350 mA |

Part Number Example

ASM6-S3D0-ANQ0H

- x₁: 3 – Far Red color
- x₂: D – 130° viewing angle
- x₄: A – AllnGaP dice
- x₅: N – Minimum radiant flux bin N
- x₆: Q – Maximum radiant flux bin Q
- x₇: 0 – Full color distribution
- x₈: H – Test current = 350 mA

Bin Information

Luminous Flux Bin Limits (CAT)

| Bin ID | Luminous Flux, Φ_V (lm) | |
|----------------------|------------------------------|-------|
| | Min. | Max. |
| Red and Green | | |
| G | 39.1 | 50.0 |
| H | 50.0 | 58.0 |
| J | 58.0 | 67.3 |
| K | 67.3 | 78.0 |
| L | 78.0 | 90.5 |
| M | 90.5 | 105.0 |
| N | 105.0 | 115.0 |
| P | 115.0 | 127.0 |
| Q | 127.0 | 140.0 |
| R | 140.0 | 154.0 |
| S | 154.0 | 169.0 |
| T | 169.0 | 186.0 |

Tolerance = $\pm 10\%$.

Radiant Flux Bin Limits (CAT)

| Bin ID | Radiant Flux, Φ_e (mW) | |
|--|-----------------------------|------|
| | Min. | Max. |
| Far Red, Royal Blue, and Deep Red (ASM6-SDx0) | | |
| N | 330 | 380 |
| P | 380 | 430 |
| Q | 430 | 480 |
| R | 480 | 530 |
| S | 530 | 610 |
| T | 610 | 705 |
| U | 705 | 810 |
| V | 810 | 930 |
| Deep Red (ASM6-SDx1) | | |
| Q | 450 | 500 |
| R | 500 | 550 |
| S | 550 | 600 |

Tolerance = $\pm 10\%$.

Color Bin Limits (BIN)

| Bin ID | Peak Wavelength, λ_p (nm) | |
|-------------------|-----------------------------------|------|
| | Min. | Max. |
| Royal Blue | | |
| 3 | 440 | 445 |
| 4 | 445 | 450 |
| 5 | 450 | 455 |
| 6 | 455 | 460 |
| Deep Red | | |
| — | 650 | 670 |
| Far Red | | |
| — | 720 | 745 |

| Bin ID | Dominant Wavelength, λ_d (nm) | |
|--------------|---------------------------------------|------|
| | Min. | Max. |
| Blue | | |
| 3 | 460 | 465 |
| 4 | 465 | 470 |
| 5 | 470 | 475 |
| 6 | 475 | 480 |
| 7 | 480 | 485 |
| Green | | |
| 1 | 515 | 520 |
| 2 | 520 | 525 |
| 3 | 525 | 530 |
| 4 | 530 | 535 |
| Red | | |
| — | 617 | 635 |

Tolerance = ± 1.0 nm.

Forward Voltage Limits (V_F)

| Bin ID | Forward Voltage, V_F (V) | |
|--------|----------------------------|------|
| | Min. | Max. |
| 1 | 1.8 | 2.0 |
| 2 | 2.0 | 2.2 |
| 3 | 2.2 | 2.4 |
| 4 | 2.4 | 2.6 |
| 5 | 2.6 | 2.8 |
| 6 | 2.8 | 3.0 |
| 7 | 3.0 | 3.2 |
| 8 | 3.2 | 3.4 |

Tolerance = $\pm 0.1V$.

Example

Example of bin information on reel and packaging label:

CAT: P – Luminous / Radiant Flux bin P
BIN: — – Full distribution color bin
VF: 4 – Forward Voltage bin 4

Figure 2: Spectral Power Distribution – Royal Blue, Blue, Green, Far Red, Deep Red, and Red

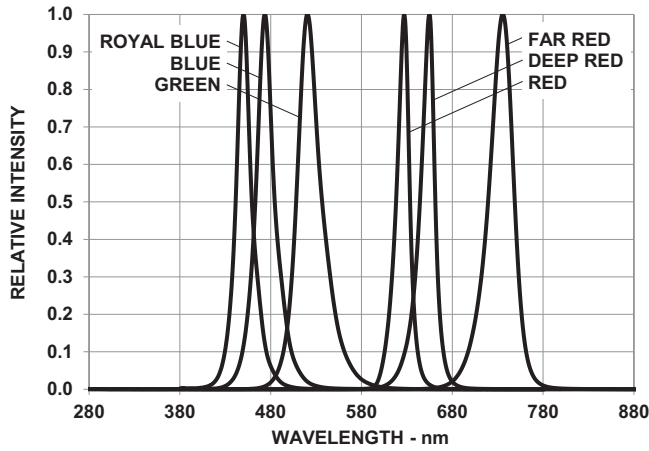


Figure 3: Forward Current vs. Forward Voltage – Royal Blue, Blue, and Green

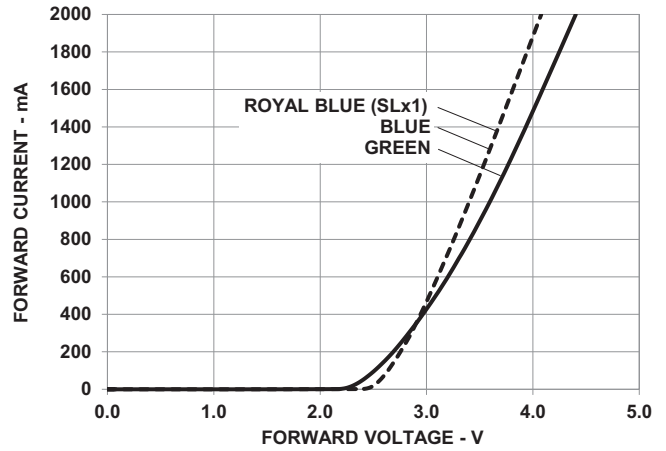


Figure 4: Forward Current vs. Forward Voltage – Far Red and Deep Red

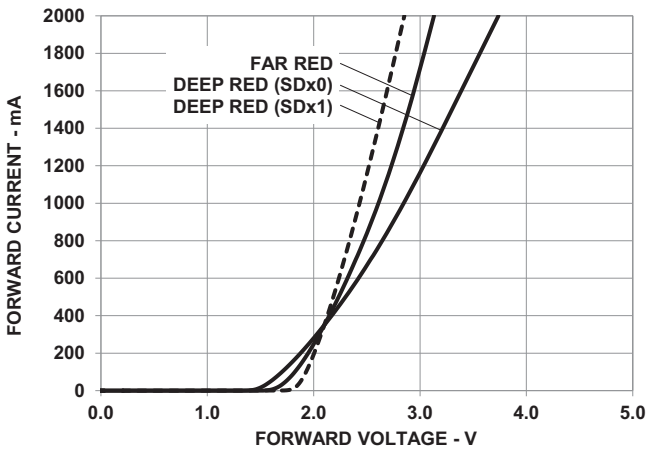


Figure 5: Forward Current vs. Forward Voltage – Red

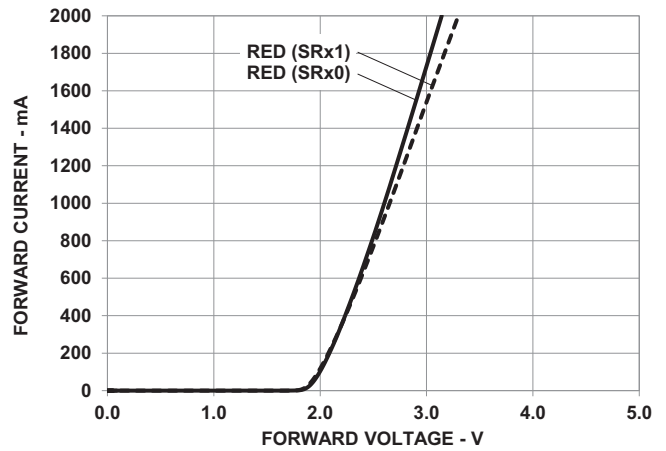


Figure 6: Relative Luminous Flux vs. Mono Pulse Current – Red (ASM6-SRx1)

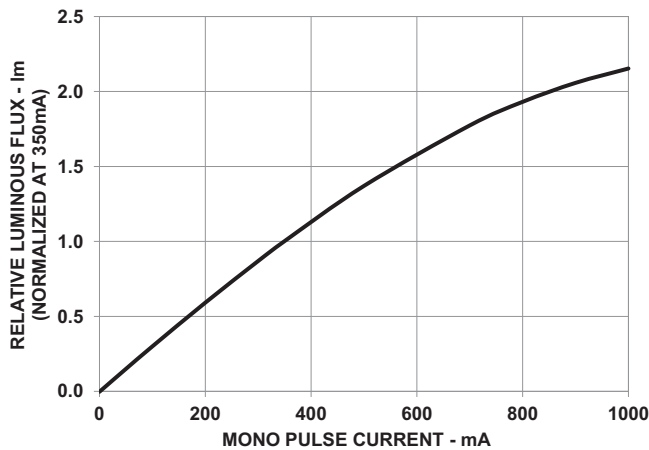


Figure 7: Relative Luminous Flux vs. Mono Pulse Current – Red (ASM6-SRx0)

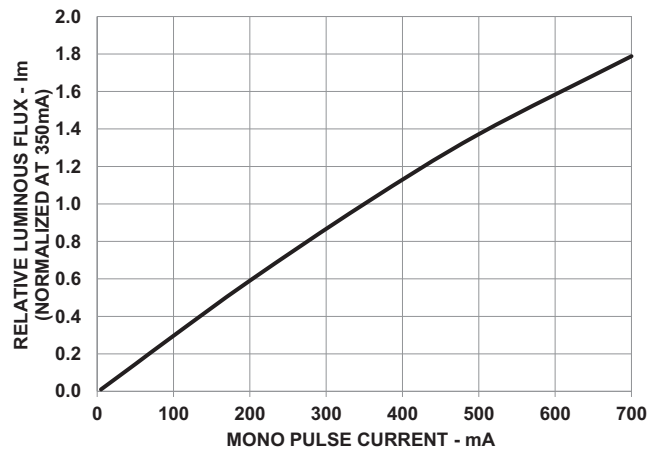


Figure 8: Relative Luminous Flux vs. Mono Pulse Current – Blue and Green

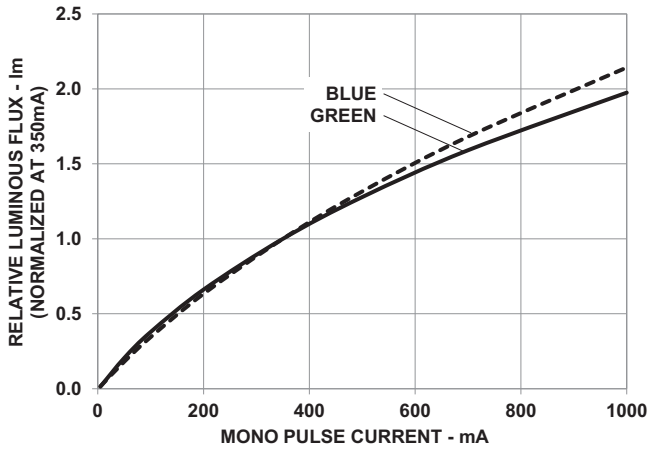


Figure 9: Relative Radiant Flux vs. Mono Pulse Current – Royal Blue, Far Red, and Deep Red

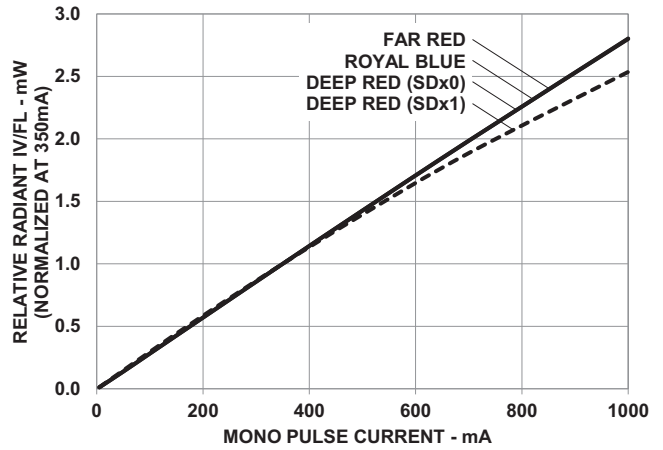


Figure 10: Dominant Wavelength Shift vs. Mono Pulse Current – Blue, Green, and Red (ASM6-SRx1)

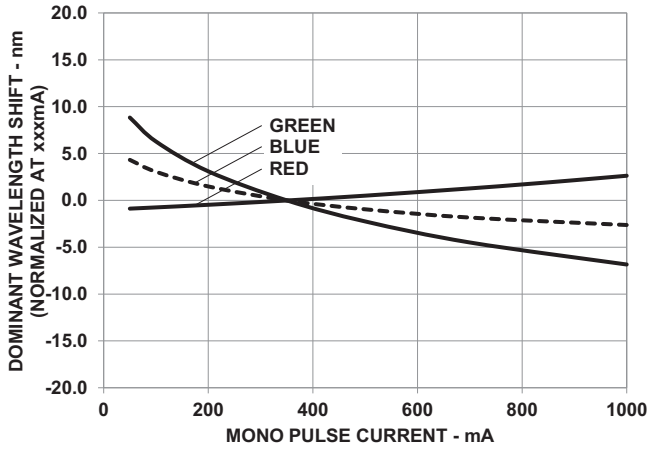


Figure 11: Dominant Wavelength Shift vs. Mono Pulse Current – Red (ASM6-SRx0)

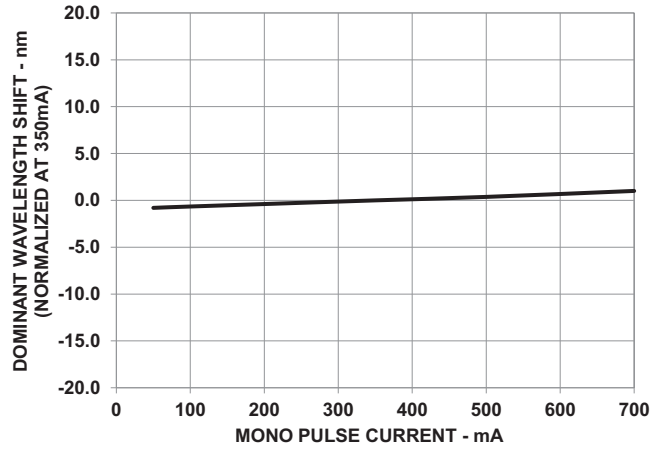


Figure 12: Peak Wavelength Shift vs. Mono Pulse Current – Far Red, Deep Red, and Royal Blue

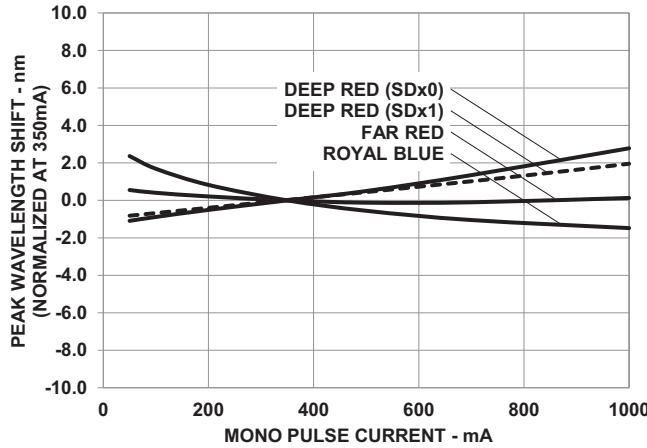


Figure 13: Relative Light Output vs. Junction Temperature – Blue, Green, and Red

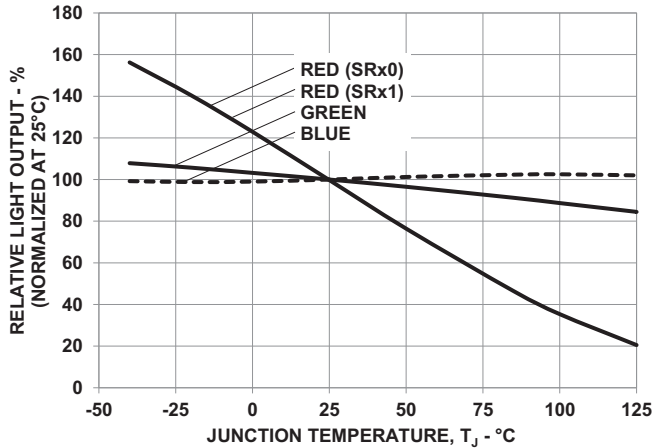


Figure 14: Relative Radiant Output vs. Junction Temperature – Royal Blue, Far Red, and Deep Red

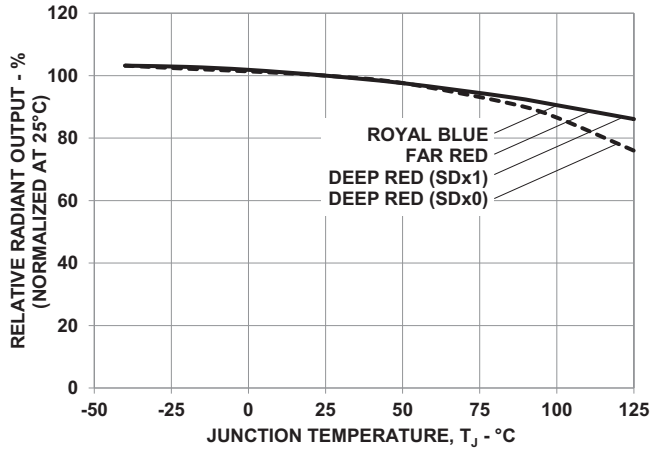


Figure 15: Forward Voltage Shift vs. Junction Temperature – Royal Blue, Blue, and Green

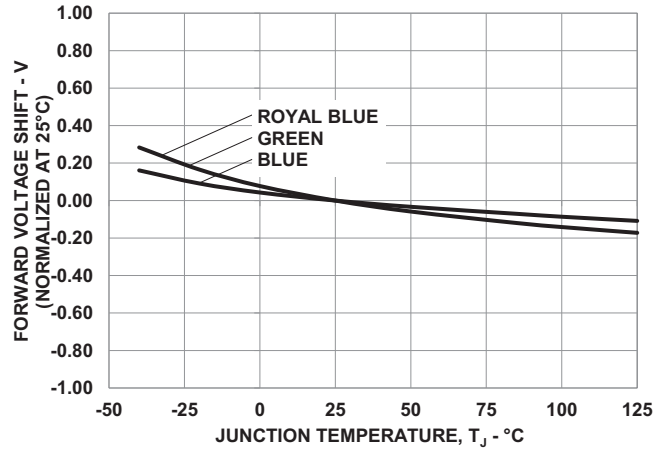


Figure 16: Forward Voltage Shift vs. Junction Temperature – Far Red, Deep Red, and Red

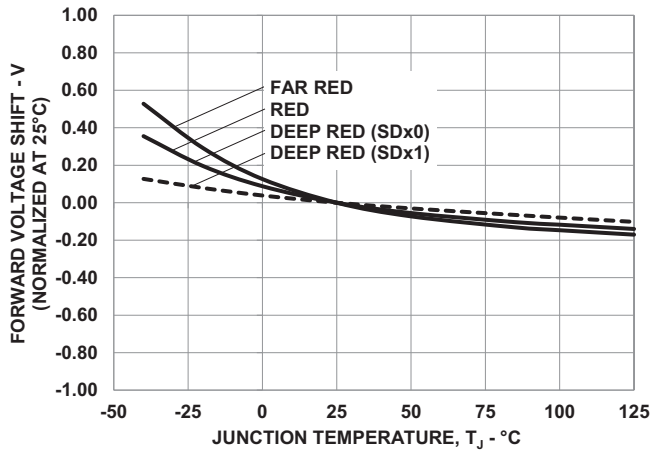


Figure 17: Dominant Wavelength Shift vs. Junction Temperature – Blue, Green, and Red

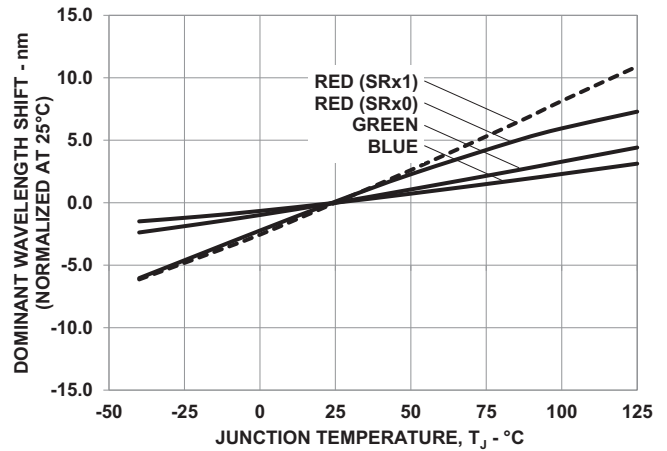


Figure 18: Peak Wavelength Shift vs. Junction Temperature – Far Red, Deep Red, and Royal Blue

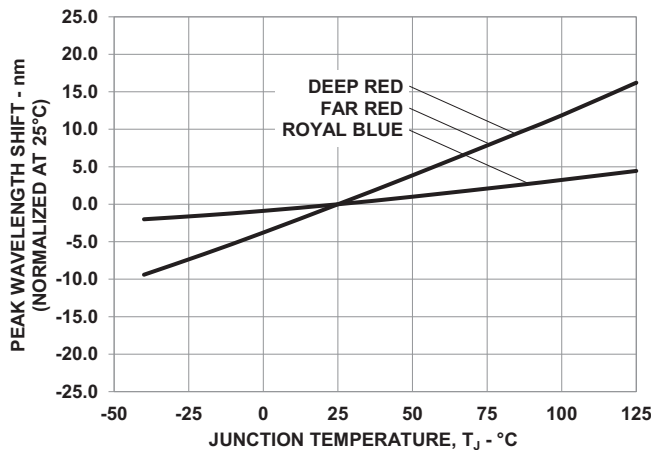


Figure 19: Radiation Pattern 90°

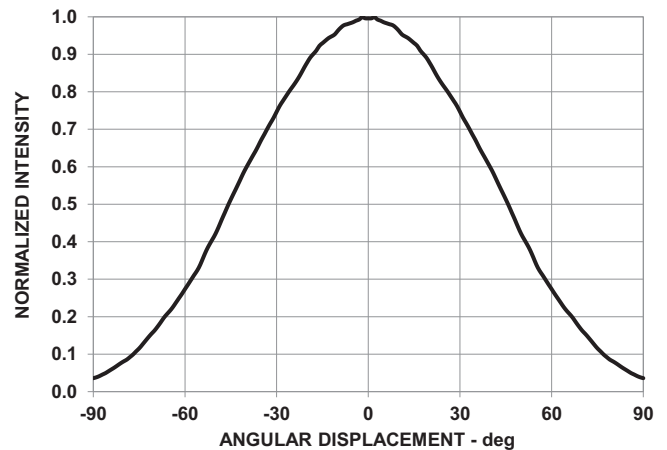


Figure 20: Radiation Pattern 130° – Royal Blue, Blue, and Green

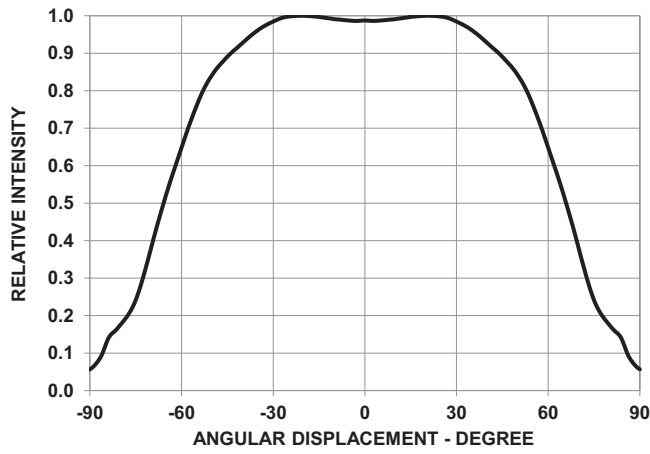


Figure 21: Radiation Pattern 130° – Far Red, Deep Red, and Red

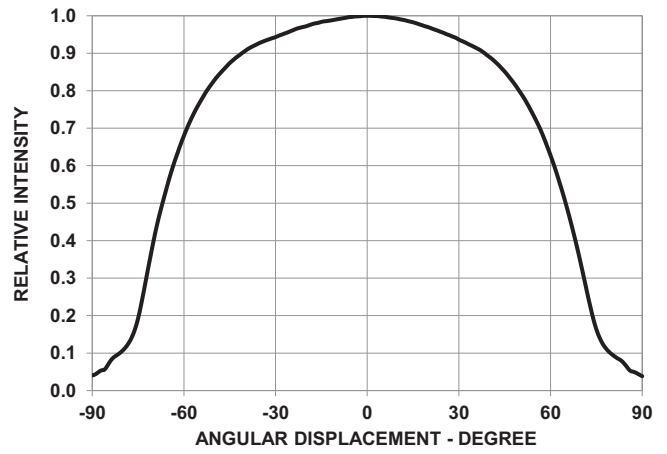


Figure 22: Maximum Forward Current vs. Ambient Temperature – Royal Blue, Blue, and Green

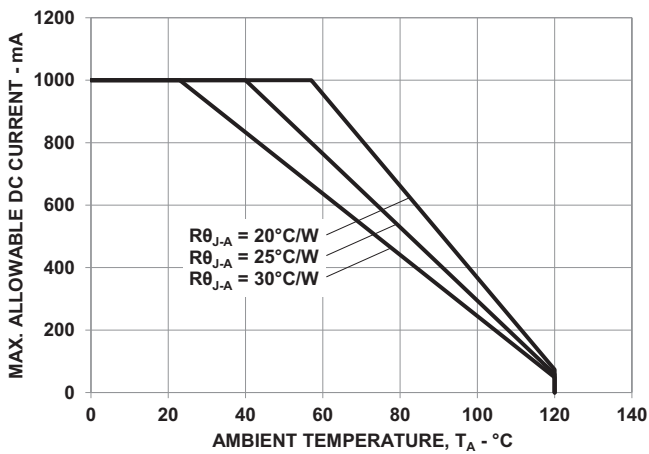


Figure 23: Maximum Forward Current vs. Ambient Temperature – Far Red and Deep Red

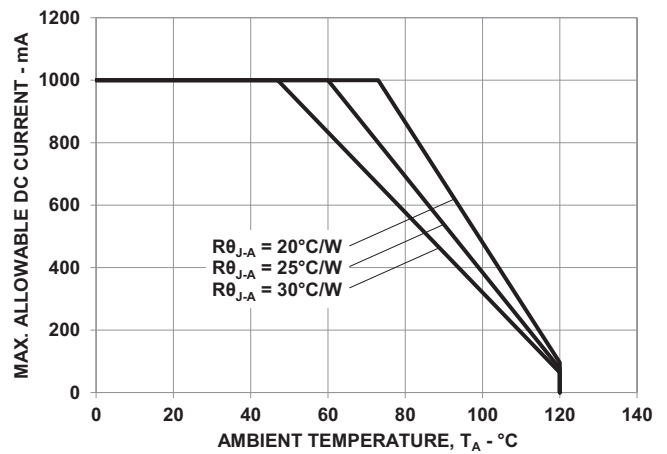


Figure 24: Maximum Forward Current vs. Ambient Temperature – Red

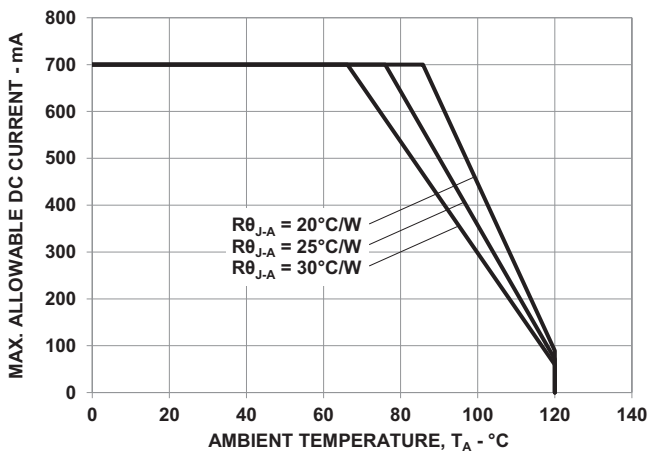


Figure 25: Maximum Forward Current vs. Solder Point Temperature – Royal Blue, Blue, and Green

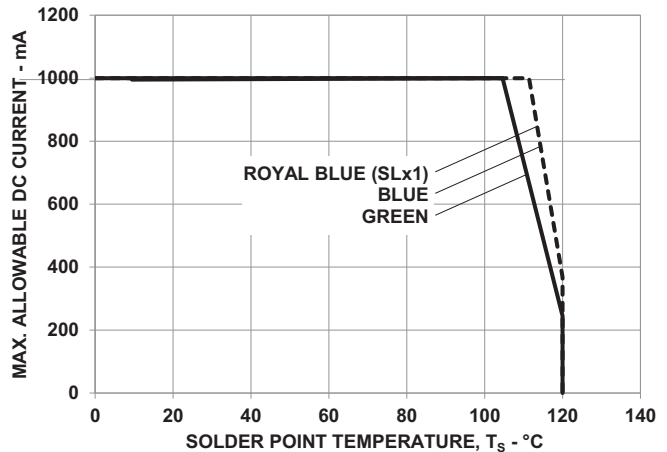


Figure 26: Maximum Forward Current vs. Solder Point Temperature – Far Red and Deep Red

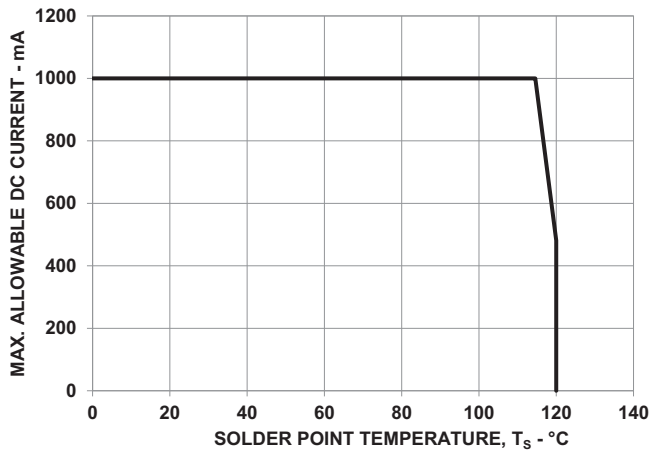


Figure 27: Maximum Forward Current vs. Solder Point Temperature – Red

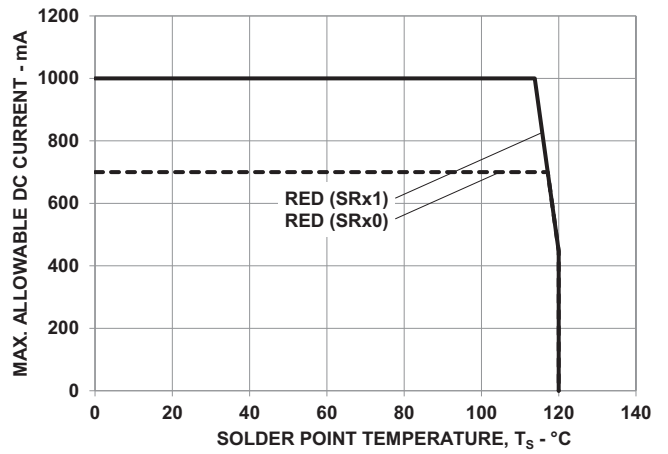


Figure 28: Recommended Soldering Land Pattern


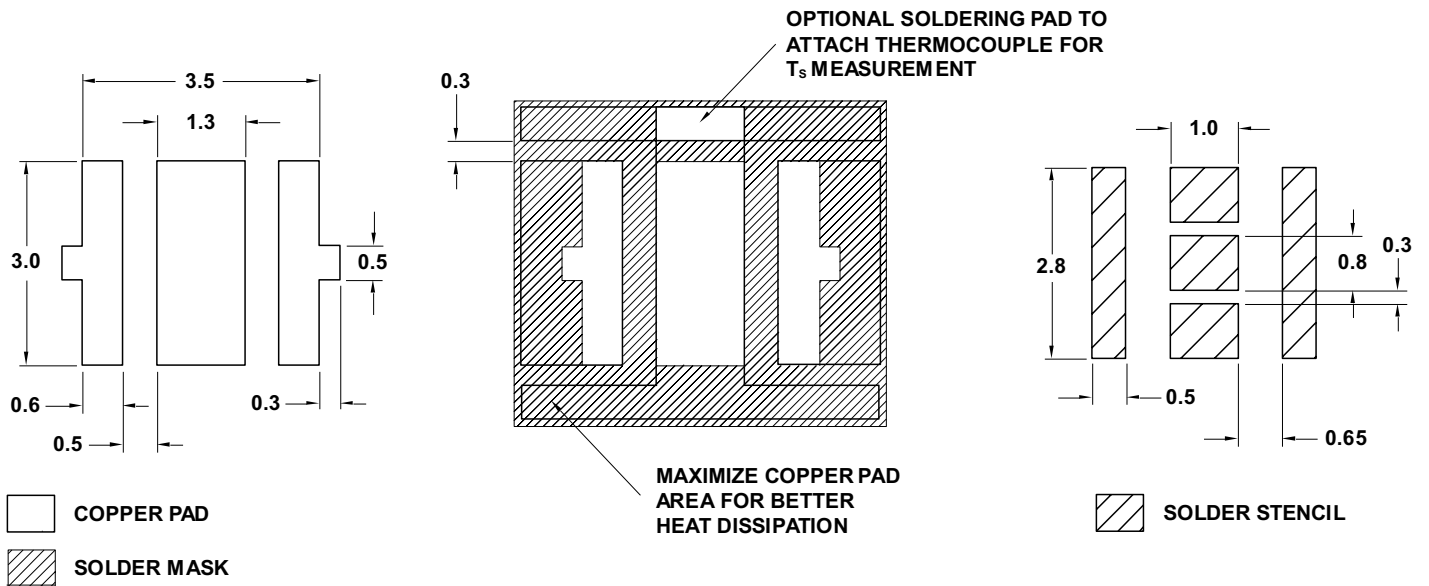


Figure 29: Carrier Tape Dimensions

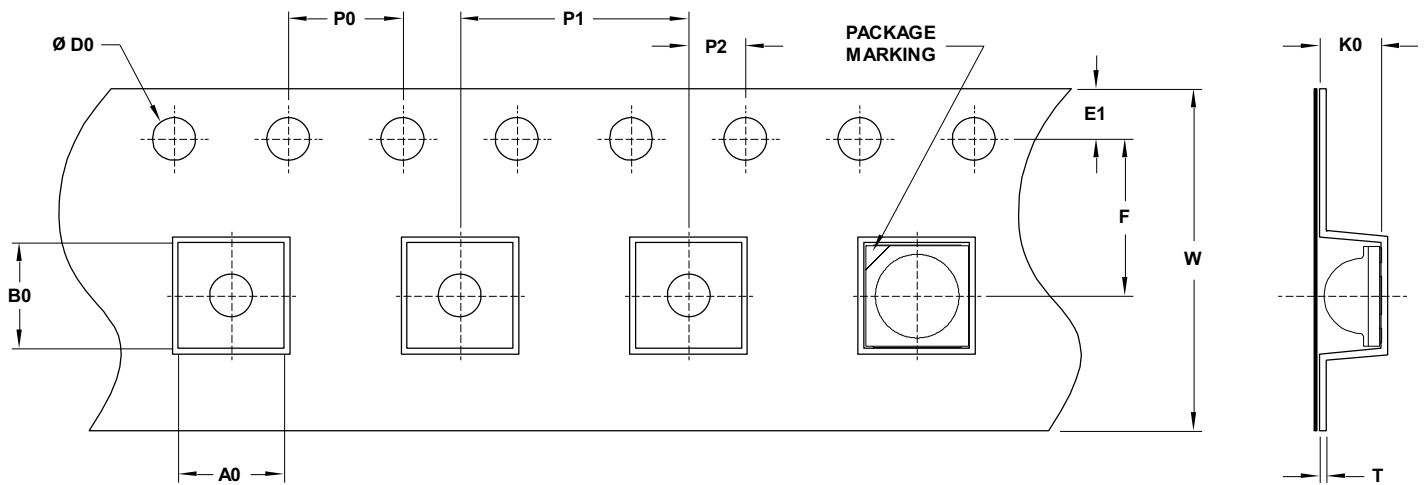


| F | P0 | P1 | P2 | D0 | E1 | W |
|-------------|-------------|-------------|-------------|------------|-------------|--------------|
| 5.50 ± 0.05 | 4.00 ± 0.10 | 8.00 ± 0.10 | 2.00 ± 0.05 | 1.50 ± 0.1 | 1.75 ± 0.10 | 12.00 ± 0.20 |

| Part Number | T | A0 | B0 | K0 |
|-------------|-------------|-------------|-------------|-------------|
| ASM6-SxDx | 0.28 ± 0.05 | 3.75 ± 0.10 | 3.75 ± 0.10 | 2.20 ± 0.10 |
| ASM6-Sx9x | 0.28 ± 0.05 | 3.75 ± 0.10 | 3.75 ± 0.10 | 2.65 ± 0.10 |

NOTE: All dimensions are in millimeters (mm).

Figure 30: Reel Dimensions

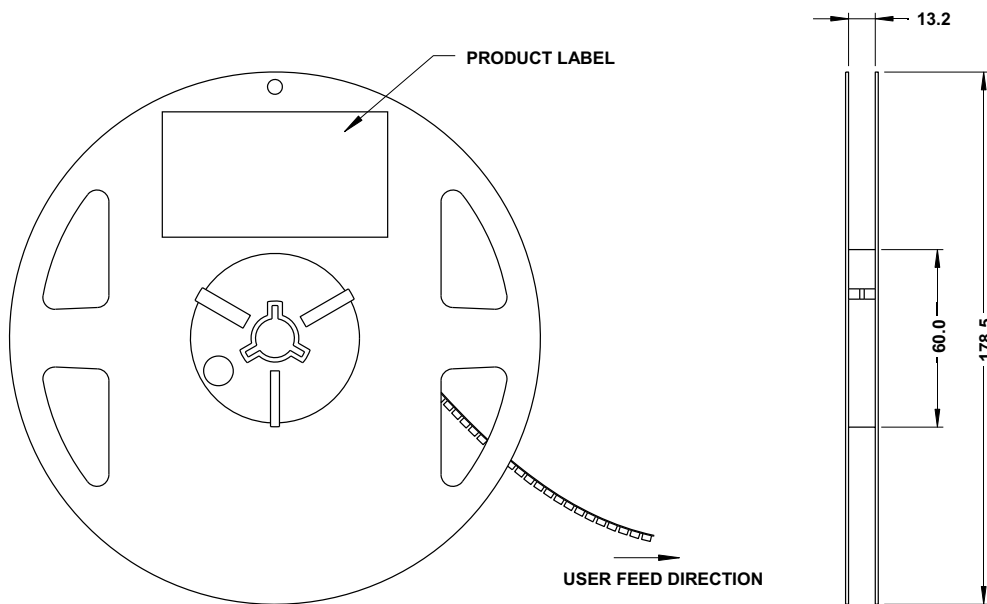


NOTE: All dimensions are in millimeters (mm).

Precautionary Notes

Reflow Soldering

- Do not perform reflow soldering more than twice.
- Observe necessary precautions for handling moisture-sensitive devices as stated in the following section.
- Do not apply any pressure or force on the LED during reflow and after reflow when the LED is still hot.

Figure 31: Recommended Lead-Free Reflow Soldering Profile

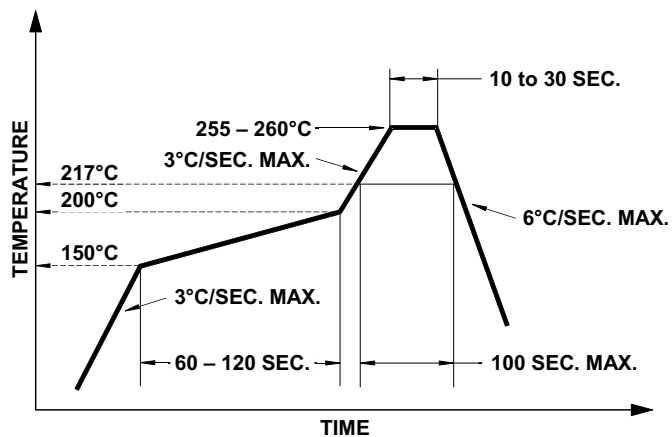

Handling Precautions

The encapsulation material of the LED is made of silicone for better product reliability. Compared to epoxy encapsulant, which is hard and brittle, silicone is softer and flexible. Observe special handling precautions while assembling silicone-encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED. For additional information, refer to Broadcom Application Note 5288, *Silicone Encapsulation for LED: Advantages and Handling Precautions*.

- Do not poke sharp objects into the silicone encapsulant. Sharp objects, such as tweezers or syringes, might apply excessive force or even pierce through the silicone and induce failures to the LED die or wire bond.
- Do not touch the silicone encapsulant. Uncontrolled force acting on the silicone encapsulant might result in excessive stress on the wire bond. Hold the LED only by the body.
- Do not stack assembled PCBs together. Use an appropriate rack to hold the PCBs.

- The surface of silicone material attracts dust and dirt easier than epoxy due to its surface tackiness. To remove foreign particles on the surface of silicone, use a cotton bud with isopropyl alcohol (IPA). During cleaning, rub the surface gently without putting too much pressure on the silicone. Ultrasonic cleaning is not recommended.
- For automated pick-and-place, Broadcom has tested a nozzle size with OD 3.7 mm and ID 3.0 mm to work with this LED. However, due to the possibility of variations in other parameters, such as pick-and-place, machine maker/model, and other settings of the machine, verify that the selected nozzle will not cause damage to the LED.

Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in this data sheet. Constant current driving is recommended to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage (V_F) of the LEDs to ensure that the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which can result in a larger variation in performance (such as intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.
- Do not use the LED in the vicinity of material with sulfur content or in environments of high gaseous sulfur compounds and corrosive elements. Examples of material that might contain sulfur are rubber gaskets, room-temperature vulcanizing (RTV) silicone rubber, rubber gloves, and so on. Prolonged exposure to such environments can affect the optical characteristics and product life.
- Avoid rapid changes in ambient temperature, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in a harsh or outdoor environment, protect the LED against damages caused by rainwater, water, dust, oil, corrosive gases, external mechanical stresses, and so on.

Thermal Management

The optical, electrical, and reliability characteristics of the LED are affected by temperature. Keep the junction temperature (T_J) of the LED below the allowable limit at all times. T_J can be calculated as follows:

$$T_J = T_A + R_{\theta J-A} \times I_F \times V_{Fmax}$$

Where:

T_A = Ambient temperature ($^{\circ}\text{C}$)

$R_{\theta J-A}$ = Thermal resistance from LED junction to ambient ($^{\circ}\text{C}/\text{W}$)

I_F = Forward current (A)

V_{Fmax} = Maximum forward voltage (V)

The complication of using this formula lies in T_A and $R_{\theta J-A}$. Actual T_A is sometimes subjective and hard to determine. $R_{\theta J-A}$ varies from system to system depending on design and is usually not known.

Another way of calculating T_J is by using the solder point temperature, T_S , as follows:

$$T_J = T_S + R_{\theta J-S} \times I_F \times V_{Fmax}$$

Where:


T_S = LED solder point temperature as shown in the following figure ($^{\circ}\text{C}$)

$R_{\theta J-S}$ = Thermal resistance from the junction to the solder point ($^{\circ}\text{C}/\text{W}$)

I_F = Forward current (A)

V_{Fmax} = Maximum forward voltage (V)

Figure 32: Solder Point Temperature on PCB

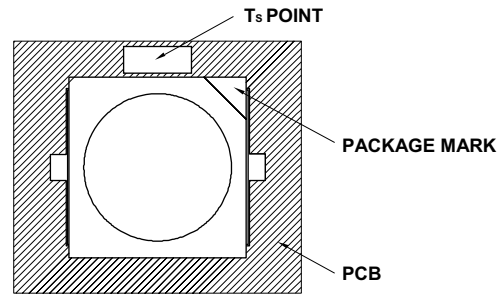

T_S can be easily measured by mounting a thermocouple on the soldering joint as shown in preceding figure, while $R_{\theta J-S}$ is provided in this data sheet. Verify the T_S of the LED in the final product to ensure that the LEDs are operating within all maximum ratings stated in this data sheet.

Eye Safety Precautions

LEDs can pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2020–2025 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

