


HDSP-H1x1/H1x3

1.0-inch Single-Digit PCB-Based LED Display

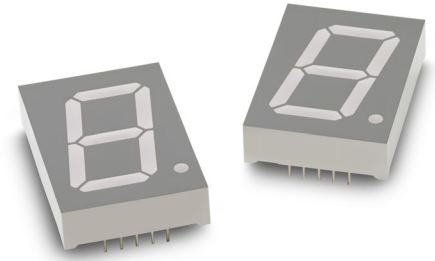

Description

The Broadcom[®] HDSP-H1x1/H1x3 is a 1.0-inch high, single-digit display series. These devices are halogenated and use AlInGaP red, green, and deep red chips.

All devices are categorized for luminous intensity. The green device is categorized for color. Use of similar device categories yields a uniform display.

Features

- High reliability
- Excellent character appearance
- Available in CA and CC
- RoHS compliant
- Gray top surface with white diffused segments



Applications

- Suitable for indoor use
- Not recommended for industrial applications, that is operating temperature requirements exceeding +85°C or below -40°C
- Extreme temperature cycling not recommended

Table 1: Ordering Information


Red	Green	Deep Red	Description
HDSP-H1E1	HDSP-H1G1	HDSP-H1A1	Common Anode, Right-Hand Decimal
HDSP-H1E3	—	—	Common Cathode, Right-Hand Decimal

Figure 1: Package Dimensions

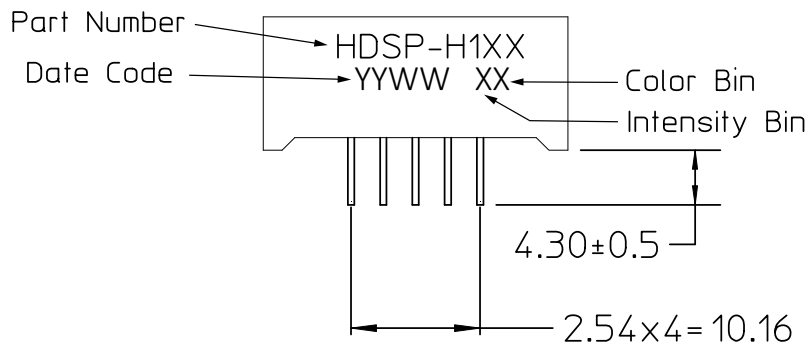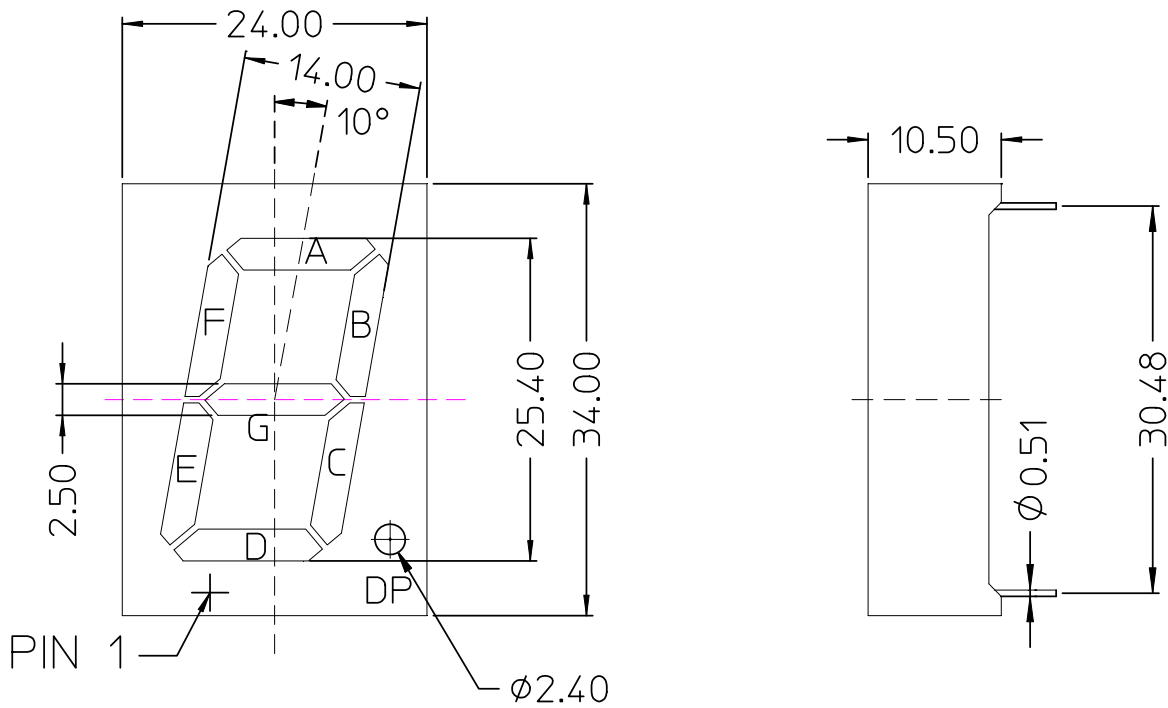

- Notes:
1. All dimensions are in millimeters.
 2. Unless otherwise stated, the tolerance is ± 0.25 mm.

Figure 2: Circuit Diagram

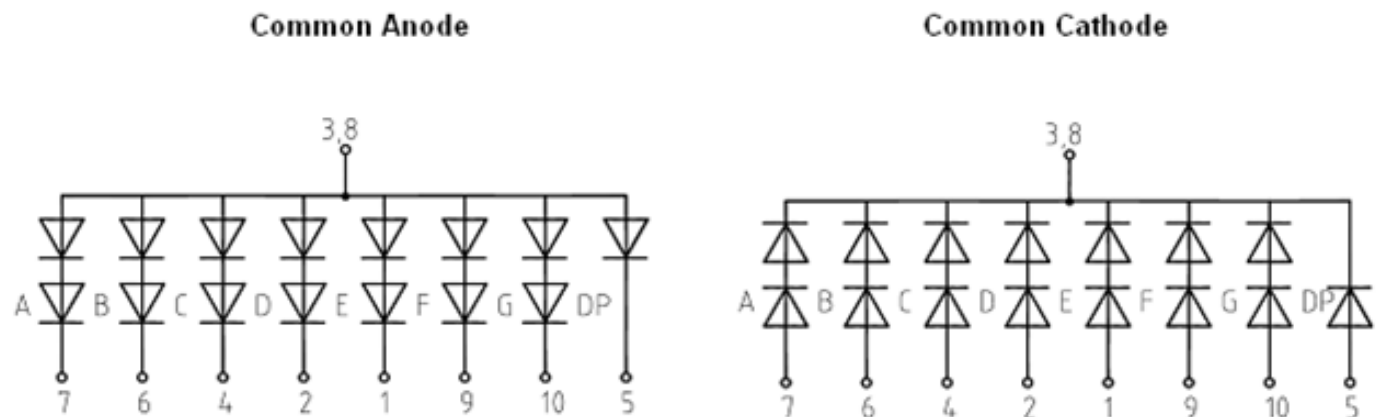

Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Red/Green/Deep Red	Units
Power Dissipation per Segment or Dot Point (DP)	P_D	10452	mW
Continuous Forward Current per Segment	I_F	20	mA
Peak Forward Current per Segment, 1/10 Duty Cycle, 0.1-ms Pulse Width	—	100	mA
Derating Linearly from 25°C per Segment	—	0.21	mA/°C
Reverse Voltage per Segment or DP	V_R	Not designed for reverse biasing	—
Operating Temperature	T_O	-40 to 85	°C
Storage Temperature	T_S	-40 to 85	°C
Wave Solder Condition 1.6 mm Below Body	—	260°C peak for 3 seconds maximum	—

Red Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Average Luminous Intensity, Digit Average	I_V	—	70	—	mcd	$I_F = 10\text{ mA}$
Peak Wavelength	λ_P	—	634	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	λ_d	—	625	—	nm	$I_F = 20\text{ mA}$
Forward Voltage per Segment/DP	V_F	—	4.0/2.0	5.2/2.6	V	$I_F = 20\text{ mA}$
Reverse Current per Segment/DP ^a	I_R	—	—	100	μA	$V_R = 10\text{V}/5\text{V}$ (DP)
Luminous Intensity Matching Ratio, Segment to Segment	I_{V-M}	—	2:1	—	—	$I_F = 10\text{ mA}$

a. Indicates the production go-no-go test only. Long-term reverse biasing is not recommended.

Green Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Average Luminous Intensity, Digit Average	I_V	—	45	—	mcd	$I_F = 10\text{ mA}$
Peak Wavelength	λ_P	—	572	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	λ_d	—	571	—	nm	$I_F = 20\text{ mA}$
Forward Voltage per Segment/DP	V_F	—	4.0/2.0	5.2/2.6	V	$I_F = 20\text{ mA}$
Reverse Current per Segment/DP ^a	I_R	—	—	100	μA	$V_R = 10\text{V}/5\text{V}$ (DP)
Luminous Intensity Matching Ratio, Segment to Segment	I_{V-M}	—	2:1	—	—	$I_F = 10\text{ mA}$

a. Indicates the production go-no-go test only. Long-term reverse biasing is not recommended.

Deep Red Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Units	Test Conditions
Average Luminous Intensity, Digit Average	I_V	—	70	—	mcd	$I_F = 10\text{ mA}$
Peak Wavelength	λ_P	—	644	—	nm	$I_F = 20\text{ mA}$
Dominant Wavelength	λ_d	—	635	—	nm	$I_F = 20\text{ mA}$
Forward Voltage per Segment/DP	V_F	—	4.0/2.0	5.2/2.6	V	$I_F = 20\text{ mA}$
Reverse Current per Segment/DP ^a	I_R	—	—	100	μA	$V_R = 10\text{V}/5\text{V (DP)}$
Luminous Intensity Matching Ratio, Segment to Segment	I_{V-M}	—	2:1	—	—	$I_F = 10\text{ mA}$

a. Indicates the production go-no-go test only. Long-term reverse biasing is not recommended.

Red

Figure 3: Relative Luminous Intensity vs. Forward Current

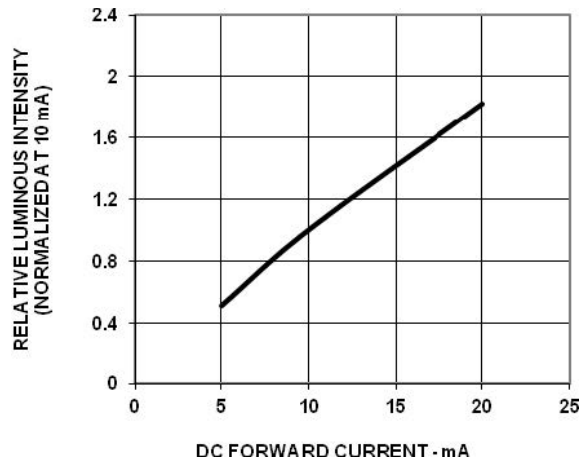


Figure 4: Forward Current vs Forward Voltage (Segment)

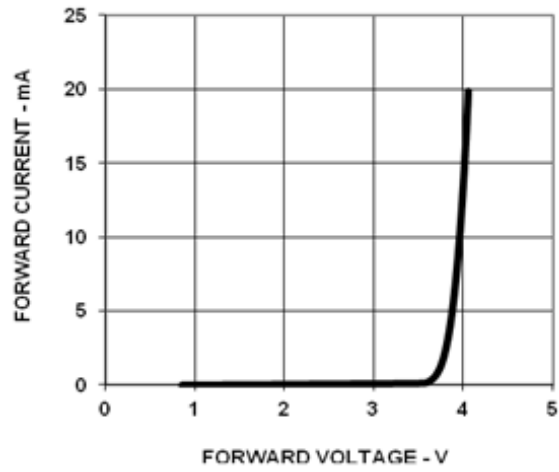


Figure 5: Forward Current vs Forward Voltage (DP)


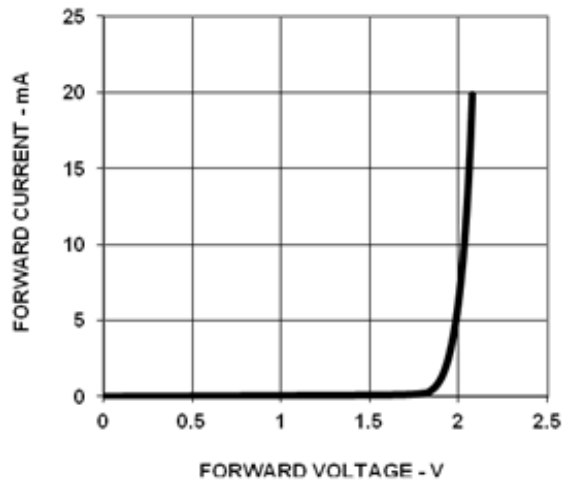


Figure 6: Relative Luminous Intensity vs. Wavelength

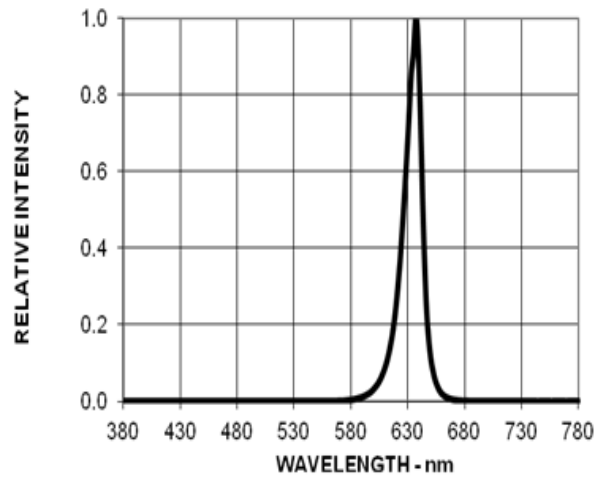

Green

Figure 7: Relative Luminous Intensity vs. Forward Current

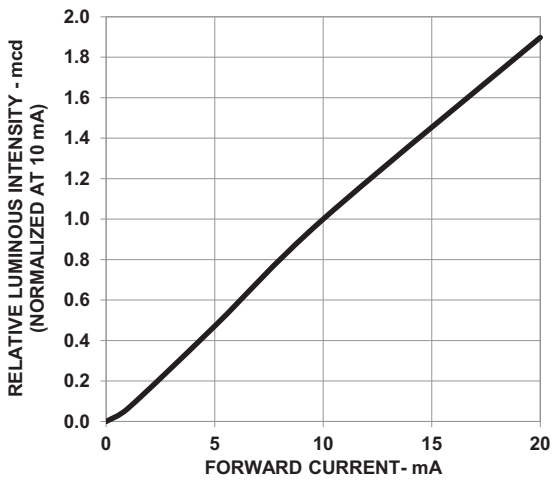


Figure 8: Forward Current vs Forward Voltage (Segment)

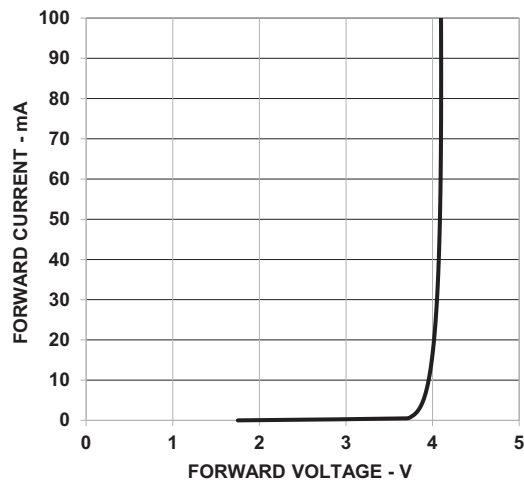


Figure 9: Forward Current vs Forward Voltage (DP)


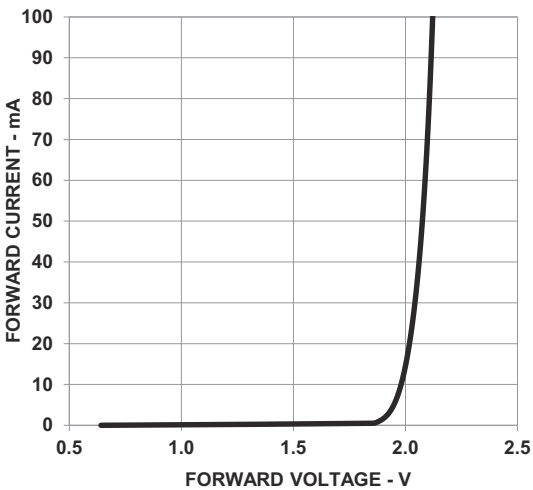


Figure 10: Relative Luminous intensity vs. Wavelength

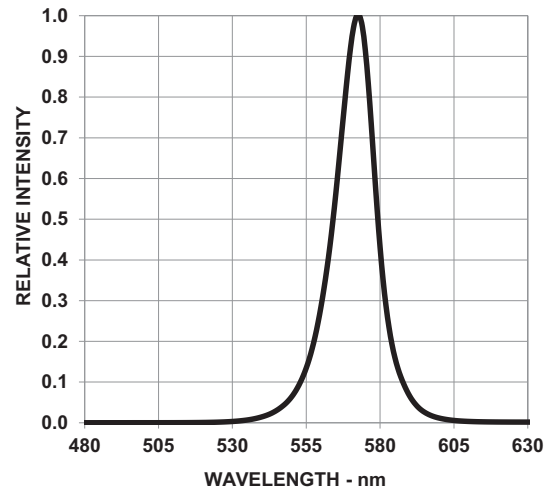

Deep Red

Figure 11: Relative Luminous Intensity vs. Forward Current

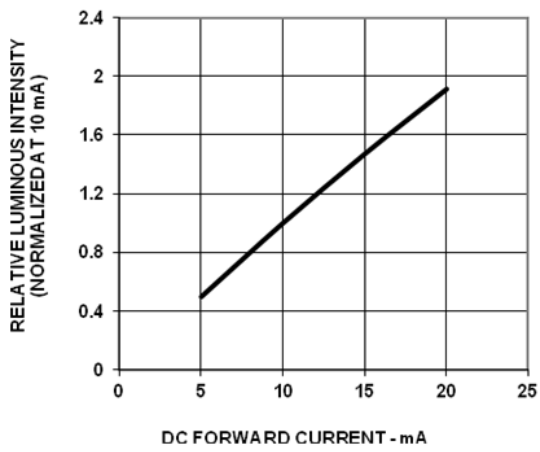


Figure 12: Forward Current vs Forward Voltage (Segment)

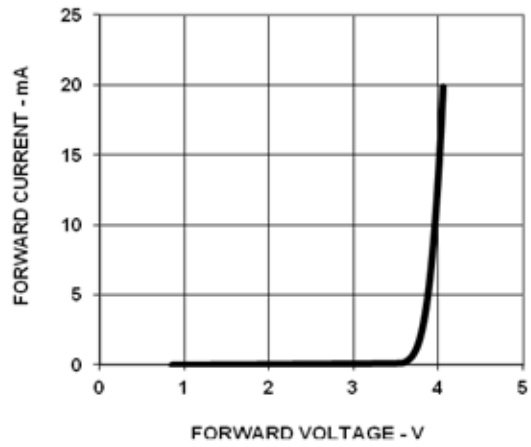


Figure 13: Forward Current vs Forward Voltage (DP)




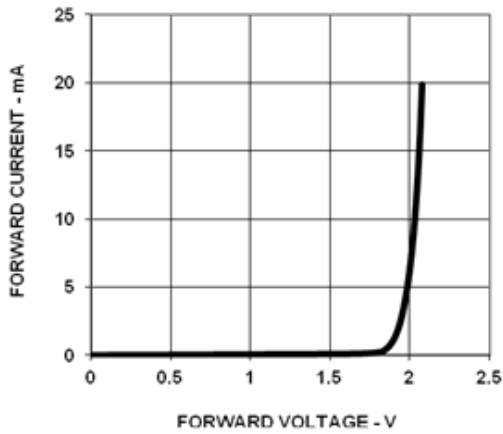


Figure 14: Relative Luminous intensity vs. Wavelength

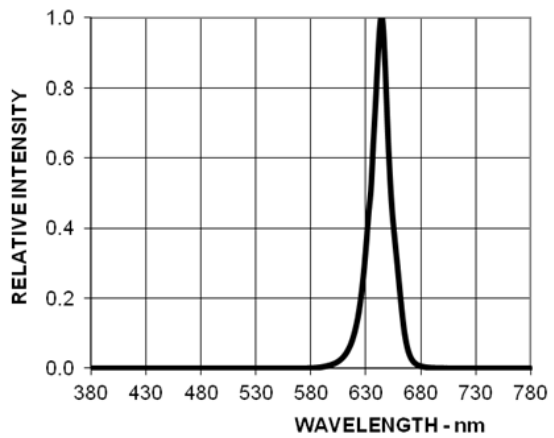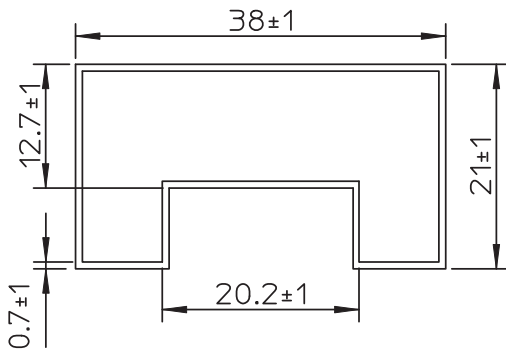


Packing Tube Specifications

20 PCS PRODUCTS PER IC TUBE

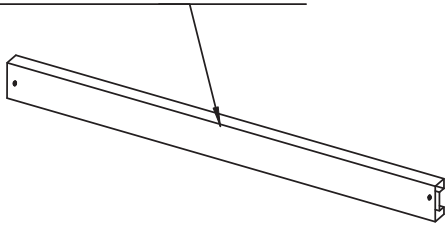

Tube Front View

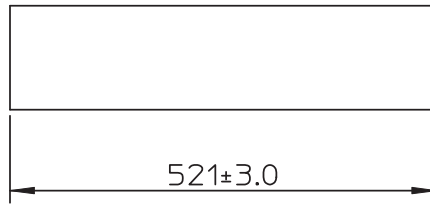

Tube Side View


NOTE: All dimensions are in millimeters.

Precautionary Notes

Soldering and Handling Precautions

- Set and maintain the wave soldering parameters according to the recommended temperature and dwell time. Perform a daily check on the profile to ensure that it is always conforming to the recommended conditions. Exceeding these conditions will overstress the LEDs and cause premature failures.
 - Use only bottom preheaters to reduce thermal stress experienced by the LEDs.
 - Recalibrate the soldering profile before loading a new type of PCB. PCBs with different sizes and designs (component densities) will have different heat capacities and might cause a change in temperature experienced by the PCBs if the same wave soldering settings are used.
 - Do not perform wave soldering more than once.
 - Any alignment fixture used during wave soldering must be loosely fitted and must not apply stress on the LEDs. Use a nonmetal material because it will absorb less heat during the wave soldering process.
 - At elevated temperatures, the LEDs are more susceptible to mechanical stress. Allow the PCB to sufficiently cool to room temperature before handling. Do not apply stress to the LED when it is hot.
 - Use wave soldering to solder the LED. Use hand soldering only for rework or touch-up if unavoidable, but it must be strictly controlled to following conditions:
 - Soldering iron tip temperature = 315°C maximum
 - Soldering duration = 2 seconds maximum
 - Number of cycles = 1 only
 - Power of soldering iron = 50W maximum
 - For ESD-sensitive devices, apply proper ESD precautions at the soldering station. Use only ESD-safe soldering irons.
 - Do not touch the LED package body with the soldering iron except for the soldering terminals as it might cause damage to the LED.
 - Confirm beforehand whether the functionality and performance of the LED are affected by soldering with hand soldering.
 - Keep the heat source at least 1.6 mm away from the LED body during soldering.
 - Design an appropriate hole size to avoid problems during insertion.
- Cleaning agents from the ketone family (acetone, methyl ethylketone, and so on) and from the chlorinated hydrocarbon family (methylene chloride, trichloroethylene, carbon tetrachloride, and so on) are not recommended for cleaning the LED displays. All of these various solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.
 - For the purpose of cleaning, wash with DI water only. The cleaning process should take place at room temperature only. Clear any water or moisture from the LED display immediately after washing.
 - Use of *No clean* solder paste is recommended for soldering.

Figure 15: Recommended Wave Soldering Profile

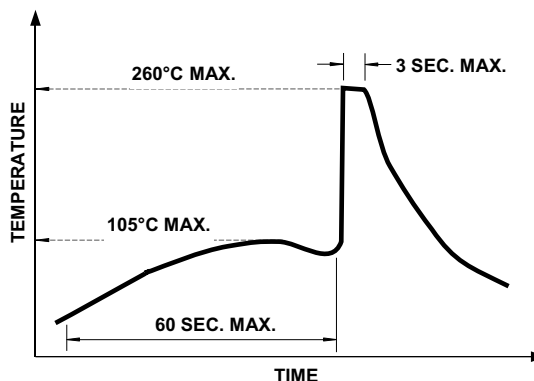

NOTE: Refers to measurements with a thermocouple mounted at the bottom of the PCB.

Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in this data sheet. Constant current driving is recommended to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage (V_F) of the LEDs to ensure that the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which might result in a larger variation of performance (meaning: intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.
- The LED is not intended for reverse bias. Use other appropriate components for such purposes. When driving the LED in matrix form, ensure that the reverse bias voltage does not exceed the allowable limit of the LED.
- Avoid rapid changes in ambient temperature, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in a harsh or outdoor environment, protect the LED against damages caused by rain, water, dust, oil, corrosive gases, external mechanical stresses, and so on.

Eye Safety Precautions

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2015–2025 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com. All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free
RoHS Compliant