

## ARE6-xxx1-0xx00

### High-Power Infrared Emitting Diodes

---

#### Description

The Broadcom<sup>®</sup> high-power IR LEDs are available in 855-nm and 945-nm peak wavelength ranges, appropriate for specific devices, such as infrared illumination, surveillance systems, CCTV, and gesture recognition.

Packaged in a 3.45 mm × 3.45 mm surface-mount platform, together with viewing angles of 80° and 140° lens optics options, the high-power IR LEDs are suitable for a wide variety of applications.

The package is compatible with the reflow soldering process. To facilitate easy pick-and-place assembly, the LEDs are packed in tape and reel.

#### Features


- Available in peak wavelengths 855 nm and 945 nm
- High radiant intensity
- High radiant power
- Low forward voltage
- Typical viewing angle: 80° and 140°
- Compatible with industrial reflow soldering process
- MSL 1

#### Applications

- Light curtain
- Infrared illumination for cameras
- Surveillance systems
- Machine vision systems
- Eye tracking systems

**CAUTION!** This device is ESD sensitive per the ANSI/ESDA/JEDEC JS-001 Standard. Observe appropriate precautions during handling and processing. Refer to Application Note AN-1142 for additional details.

Figure 1: Package Drawing

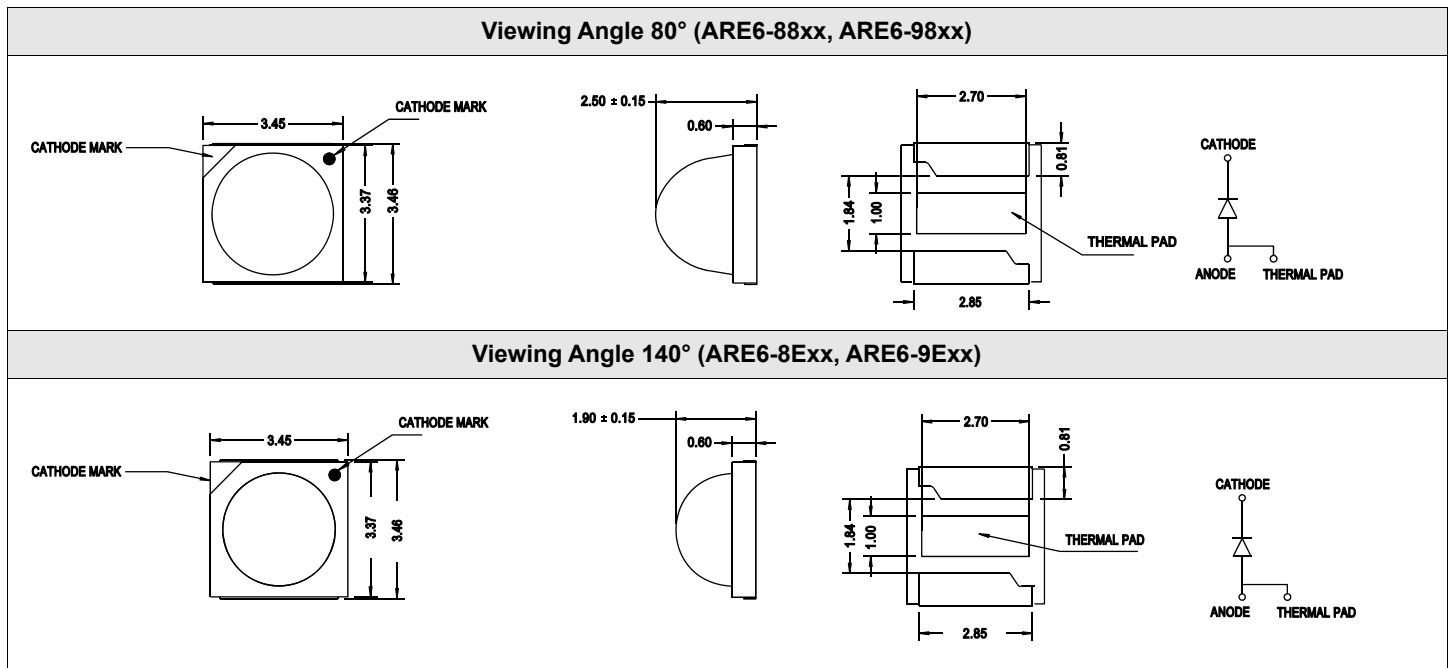**NOTE:**

1. All dimensions are in millimeters (mm).
2. Tolerance is  $\pm 0.1$  mm unless otherwise specified.

**Device Selection Guide ( $T_J = 25^\circ\text{C}$ ,  $I_F = 1\text{A}$ )**

Part Number	Peak Wavelength, $\lambda_{\text{peak}}$ (nm)	Radiant Intensity, $I_e$ (mW/sr) <sup>a, b</sup>		Radiant Flux, $\Phi_e$ (mW) <sup>c</sup>	Viewing Angle, $2\theta_{1/2}$ (°) <sup>d</sup>
		Min.	Max.	Typ.	Typ.
ARE6-88C1-0GH00	855	400	630	860	80
ARE6-88D1-0GH00	855	400	630	860	80
ARE6-8831-0JL00	855	630	1250	1360	80
ARE6-8EC1-0DF00	855	200	400	860	140
ARE6-8ED1-0DF00	855	200	400	860	140
ARE6-8E31-0FH00	855	320	630	1360	140
ARE6-98D1-0FH00	945	320	630	650	80
ARE6-9831-0JL00	945	630	1250	1340	80
ARE6-9831-0JJ00	945	630	800	1340	80

- The radiant intensity,  $I_e$ , is measured at the mechanical axis of the package and it is tested with a single current pulse condition ( $t_p = 10$  ms). The actual peak of the spatial radiation pattern may not be aligned with the axis.
- Tolerance is  $\pm 15\%$ .
- The radiant flux,  $\Phi_e$ , is the total flux output as measured with an integrating sphere at a single current pulse condition ( $t_p = 10$  ms).
- $\theta_{1/2}$  is the off-axis angle where the radiant intensity is half of the peak intensity.

## Absolute Maximum Ratings

Parameters	ARE6-8xC1	ARE6-8xD1	ARE6-8x31	ARE6-98D1	ARE6-9831	Units
DC Forward Current <sup>a</sup>	1000	2000	1500	1000	1500	mA
Peak Forward Current <sup>b, c</sup>	3000	3000	3000	3000	3000	mA
Power Dissipation	2000	4000	5025	2300	4725	mW
Reverse Voltage	Not designed for reverse bias operation					
LED Junction Temperature	145	145	145	145	145	°C
Operating Temperature Range	-40 to +120	-40 to +120	-40 to +120	-40 to +120	-40 to +120	°C
Storage Temperature Range	-40 to +120	-40 to +120	-40 to +120	-40 to +120	-40 to +120	°C

a. Derate linearly as shown in [Figure 8](#), [Figure 9](#), [Figure 10](#), [Figure 11](#), and [Figure 12](#).

b. Duty factor = 10%, frequency = 1 kHz.

c. Solder point temperature,  $T_S = 25^\circ\text{C}$ .

## Optical and Electrical Characteristics ( $T_J = 25^\circ\text{C}$ )

Parameters	Min.	Typ.	Max.	Units	Test Condition	
Forward Voltage, $V_F$ <sup>a</sup>				V	$I_F = 1\text{A}$	
ARE6-8xC1	1.50	1.70	2.00			
ARE6-8xD1	1.40	1.65	2.00			
ARE6-8x31	2.80	3.05	3.35			
ARE6-98D1	1.60	1.90	2.30			
ARE6-9831	2.70	2.95	3.15			
Reverse Voltage, $V_R$	Not designed for reverse bias					
Thermal Resistance, $R_{\theta J-S}$ <sup>b</sup>	—	8	—	°C/W	LED junction to solder point	

a. Forward voltage tolerance is  $\pm 0.1\text{V}$ .

b. Thermal resistance from LED junction to solder point.

## Part Numbering System

A R E 6 - x<sub>1</sub> x<sub>2</sub> x<sub>3</sub> 1 - 0 x<sub>4</sub> x<sub>5</sub> 0 0

Code	Description	Option	
x <sub>1</sub>	Peak Wavelength	8	855nm
		9	945nm
x <sub>2</sub>	Viewing Angle	8	80°
		E	140°
x <sub>3</sub>	Brightness Option	C	Single-junction normal brightness
		D	Single-junction high brightness
		3	Double-junction high brightness
x <sub>4</sub>	Minimum Radiant Intensity	See <a href="#">Intensity Bin Limits (CAT)</a>	
x <sub>5</sub>	Maximum Radiant Intensity	See <a href="#">Intensity Bin Limits (CAT)</a>	

## Part Number Example

ARE6-88D1-0GH00

- x1: 8 – Peak wavelength 855 nm
- x2: 8 – Viewing angle typical 80°
- x3: D – Single junction high brightness
- x4: G – Minimum intensity bin G
- x5: H – Maximum intensity bin H

## Bin Information

### Intensity Bin Limits (CAT)

Bin ID	Radiant Intensity, I <sub>e</sub> (mW/sr)	
	Min.	Max.
D	200	250
E	250	320
F	320	400
G	400	500
H	500	630
J	630	800
K	800	1000
L	1000	1250

Tolerance = ± 15%.

Figure 2: Spectral Power Distribution

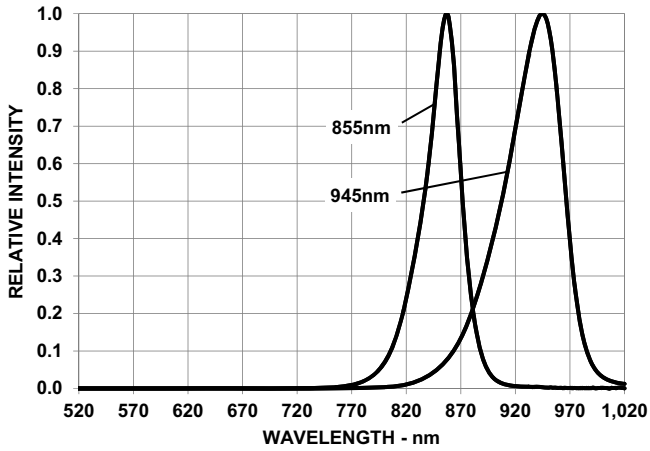


Figure 3: Forward Current vs. Forward Voltage

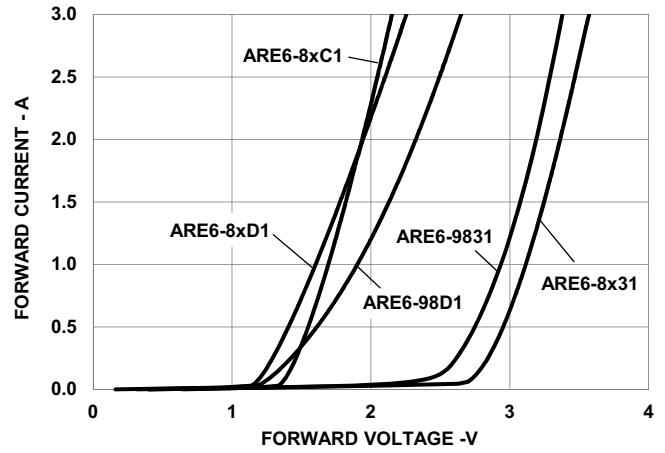


Figure 4: Relative Radiant Flux vs. Mono Pulse Current

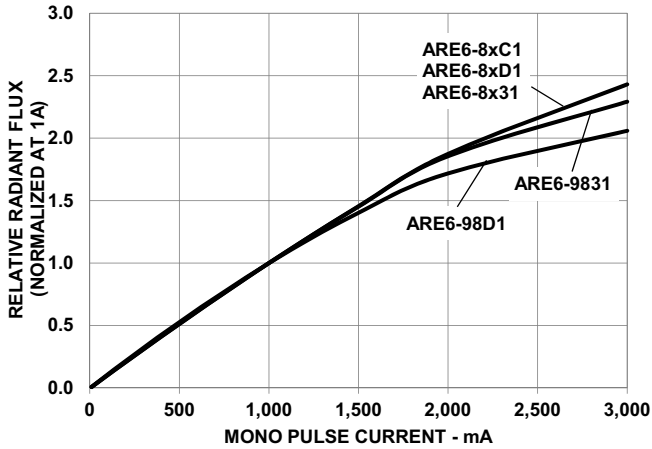


Figure 5: Relative Light Output vs. Junction Temperature

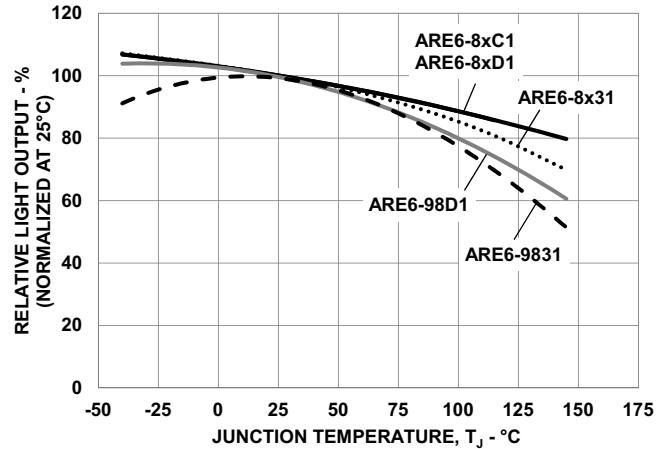


Figure 6: Forward Voltage Shift vs. Junction Temperature



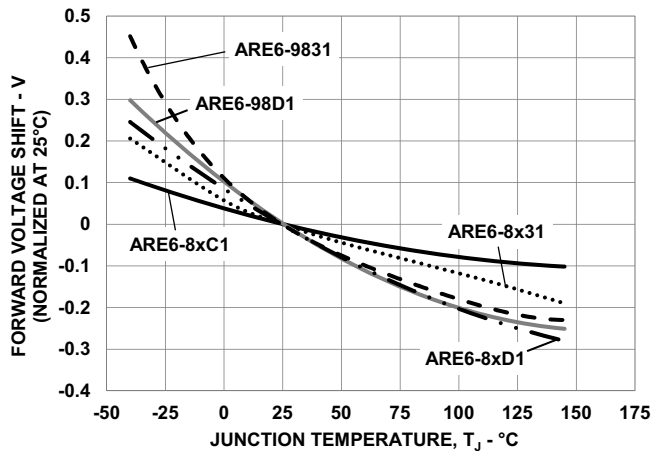



Figure 7: Radiation Pattern

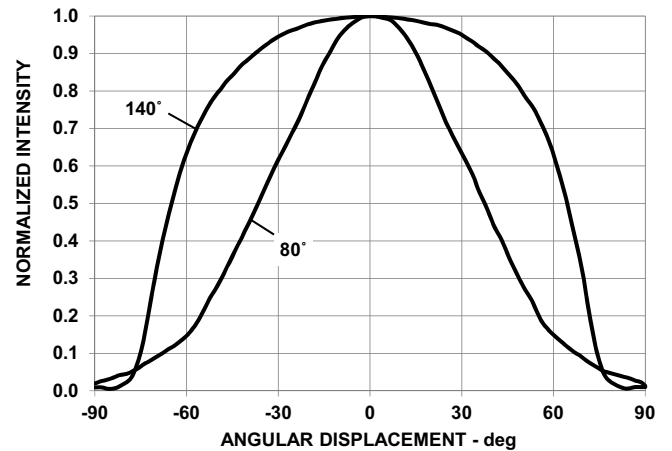


**Figure 8: Maximum Forward Current vs. Ambient Temperature for ARE6-8xC1**

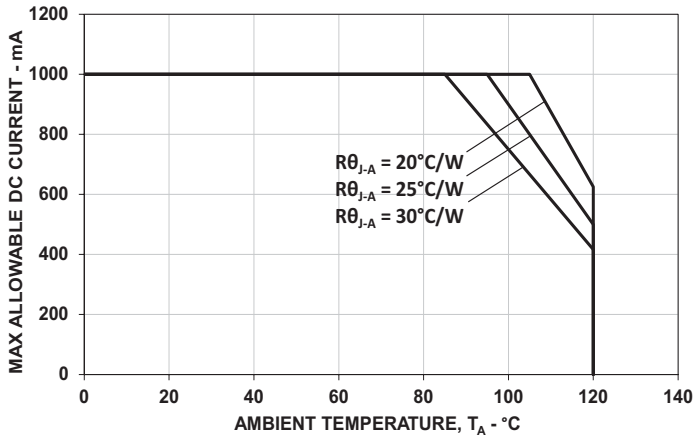


**Figure 9: Maximum Forward Current vs. Ambient Temperature for ARE6-8xD1**

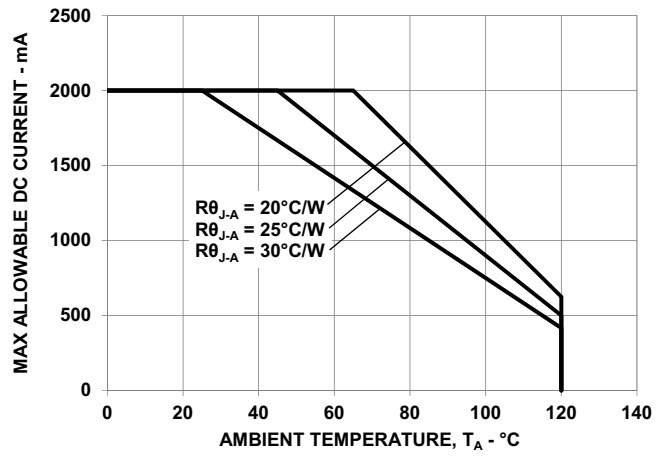


**Figure 10: Maximum Forward Current vs. Ambient Temperature for ARE6-8x31**

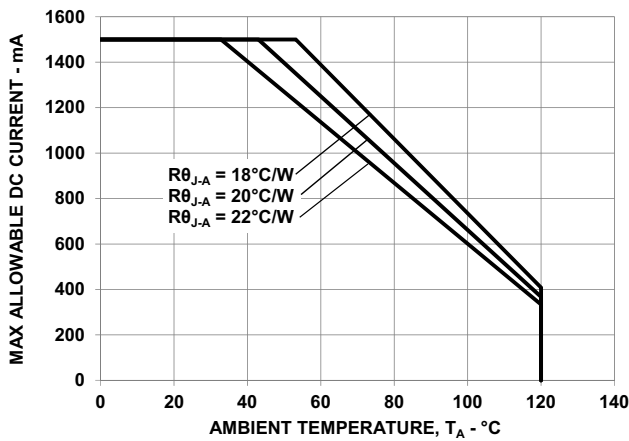


**Figure 11: Maximum Forward Current vs. Ambient Temperature for ARE6-98D1**

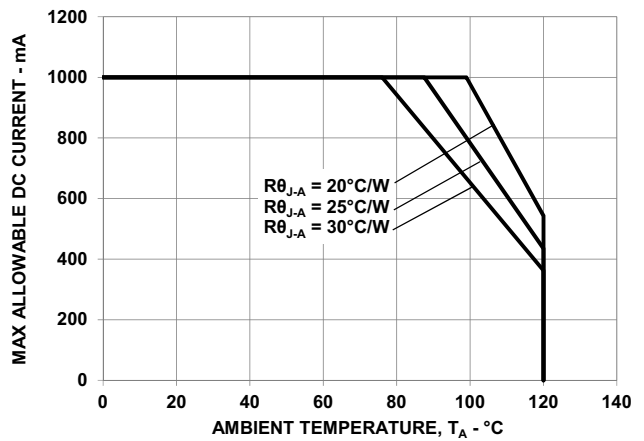


**Figure 12: Maximum Forward Current vs. Ambient Temperature for ARE6-9831**

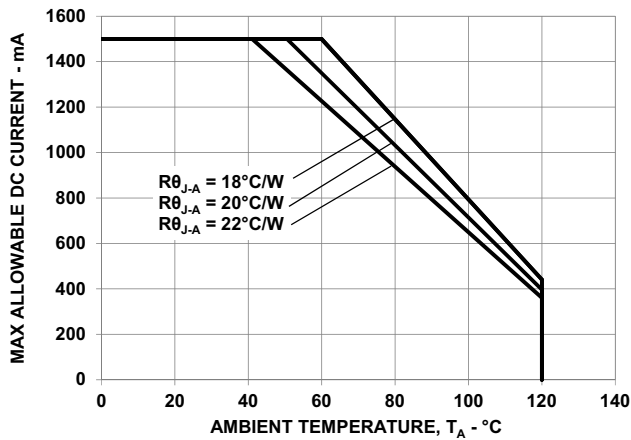

**Figure 13: Maximum Forward Current vs. Solder Point Temperature**

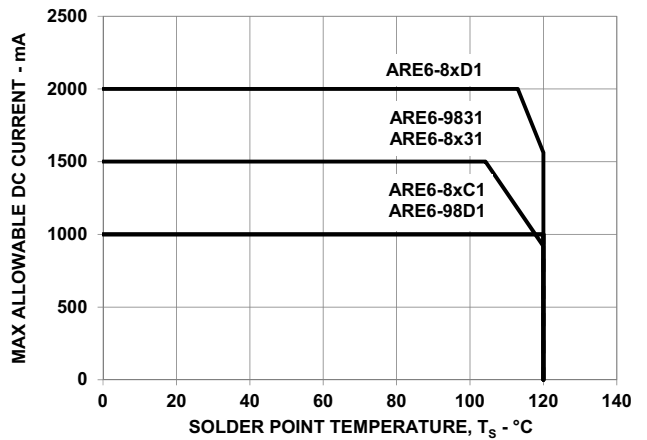


**Figure 14: Recommended Soldering Land Pattern**

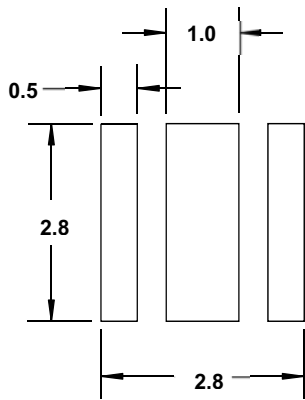


**NOTE:** All dimensions are in millimeters (mm).

**Figure 15: Carrier Tape Dimensions for Viewing Angle 80°**

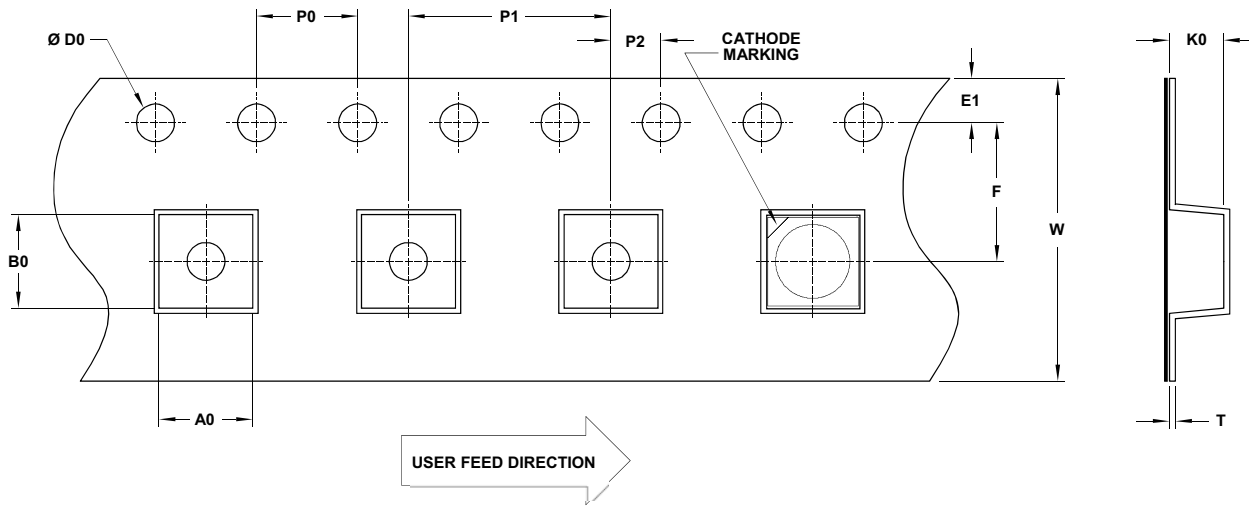

F	P0	P1	P2	D0	E1	W
5.50 ± 0.10	4.00 ± 0.10	8.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	12.00 ± 0.30
T	B0	K0	A0			
0.25 ± 0.10	3.70 ± 0.10	2.65 ± 0.10	3.70 ± 0.10			


**Figure 16: Carrier Tape Dimensions for Viewing Angle 140°**

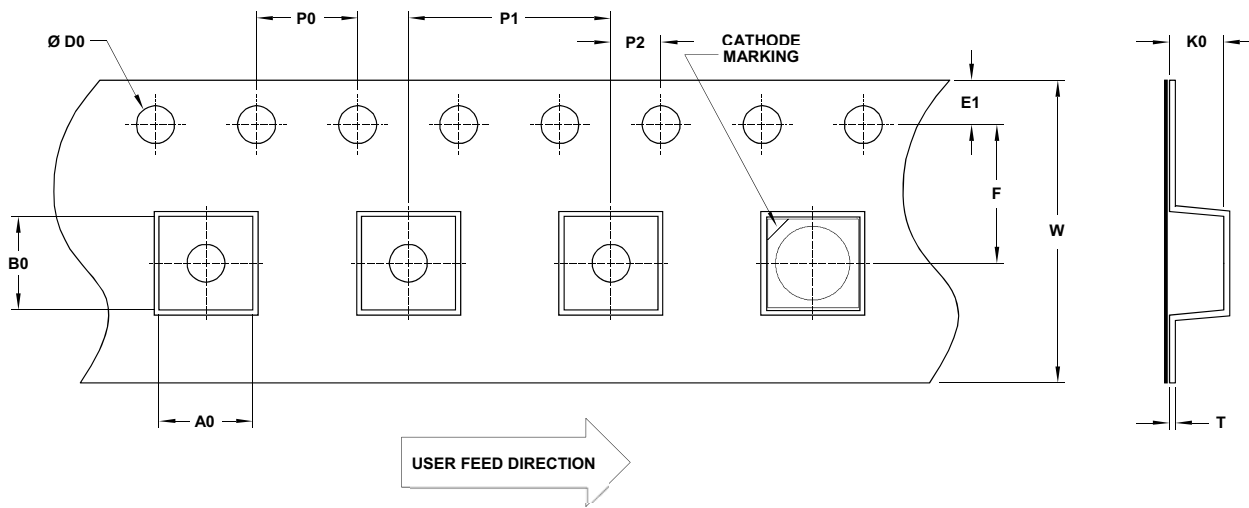

F	P0	P1	P2	D0	E1	W
5.50 ± 0.10	4.00 ± 0.10	8.00 ± 0.10	2.00 ± 0.10	1.50 ± 0.10	1.75 ± 0.10	12.00 ± 0.30
T	B0	K0	A0			
0.28 ± 0.10	3.75 ± 0.10	2.20 ± 0.10	3.75 ± 0.10			

**NOTE:** All dimensions in millimeters (mm).

**Figure 17: Reel Dimensions**

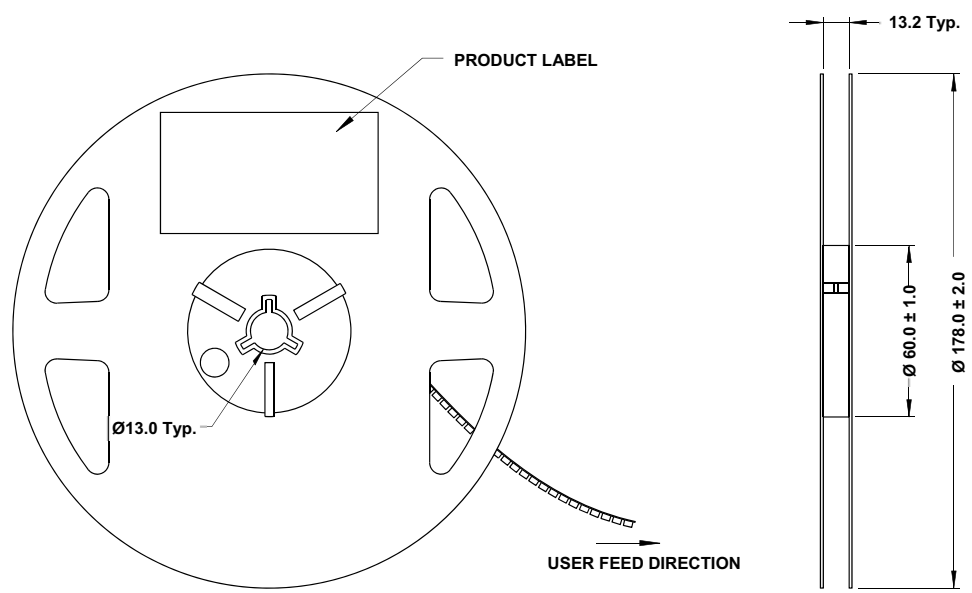

**NOTE:** All dimensions are in millimeters (mm).




## Precautionary Notes

### Reflow Soldering

- Do not perform reflow soldering more than twice. Observe necessary precautions of handling moisture-sensitive devices as stated in the following section.
- Do not apply any pressure or force on the LED during reflow and after reflow when the LED is still hot.

Figure 18: Recommended Lead-Free Reflow Soldering Profile

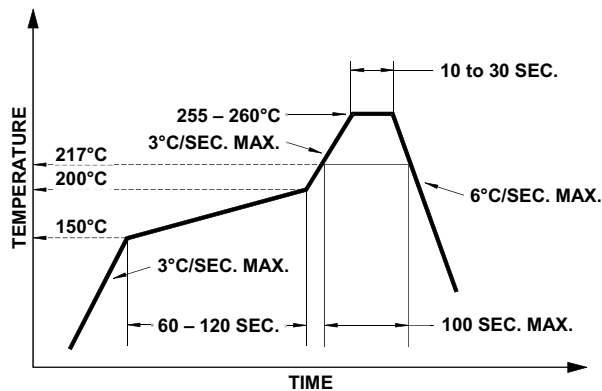

### Handling Precautions

The encapsulation material of the LED is made of silicone for better product reliability. Compared to epoxy encapsulant, which is hard and brittle, silicone is softer and flexible. Observe special handling precautions during assembly of silicone encapsulated LED products. Failure to comply might lead to damage and premature failure of the LED. Refer to Broadcom Application Note AN5288, *Silicone Encapsulation for LED: Advantages and Handling Precautions*, for additional information.

- Do not poke sharp objects into the silicone encapsulant. Sharp objects, such as tweezers or syringes, might apply excessive force or even pierce through the silicone and induce failures to the LED die or wire bond.
- Do not touch the silicone encapsulant. Uncontrolled force acting on the silicone encapsulant might result in excessive stress on the wire bond. Hold the LED only by the body.

- Do not stack assembled PCBs together. Use an appropriate rack to hold the PCBs.
- The surface of silicone material attracts dust and dirt easier than epoxy due to its surface tackiness. To remove foreign particles on the surface of silicone, use a cotton bud with isopropyl alcohol (IPA). During cleaning, rub the surface gently without putting too much pressure on the silicone. Do not use ultrasonic cleaning.

### Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in the data sheet. Use constant current driving to ensure consistent performance.
- Circuit design must cater to the whole range of forward voltage ( $V_F$ ) of the LEDs to ensure the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which may result in a larger variation of performance (such as intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.
- Do not use the LED in the vicinity of material with sulfur content or in environments of high gaseous sulfur compounds and corrosive elements. Examples of material that might contain sulfur are rubber gaskets, room-temperature vulcanizing (RTV) silicone rubber, rubber gloves, and so on. Prolonged exposure to such environments may affect the optical characteristics and product life.
- Avoid rapid change in ambient temperatures, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in a harsh or an outdoor environment, protect the LED against damages caused by rain water, water, dust, oil, corrosive gases, external mechanical stresses, and so on.

## Thermal Management

The optical, electrical, and reliability characteristics of the LED are affected by temperature. Keep the junction temperature ( $T_J$ ) of the LED below the allowable limit at all times.  $T_J$  can be calculated as follows:

$$T_J = T_A + R_{\theta J-A} \times I_F \times V_{Fmax}$$

where:

$T_A$  = Ambient temperature ( $^{\circ}\text{C}$ )

$R_{\theta J-A}$  = Thermal resistance from LED junction to ambient ( $^{\circ}\text{C}/\text{W}$ )

$I_F$  = Forward current (A)

$V_{Fmax}$  = Maximum forward voltage (V)

The complication of using this formula lies in  $T_A$  and  $R_{\theta J-A}$ . Actual  $T_A$  is sometimes subjective and hard to determine.  $R_{\theta J-A}$  varies from system to system depending on design and is usually not known.

Another way of calculating  $T_J$  is by using the solder point temperature,  $T_S$  as follows:

$$T_J = T_S + R_{\theta J-S} \times I_F \times V_{Fmax}$$

where:


$T_S$  = LED solder point temperature as shown in the following figure ( $^{\circ}\text{C}$ )

$R_{\theta J-S}$  = Thermal resistance from junction to solder point ( $^{\circ}\text{C}/\text{W}$ )

$I_F$  = Forward current (A)

$V_{Fmax}$  = Maximum forward voltage (V)

**Figure 19: Solder Point Temperature on PCB**

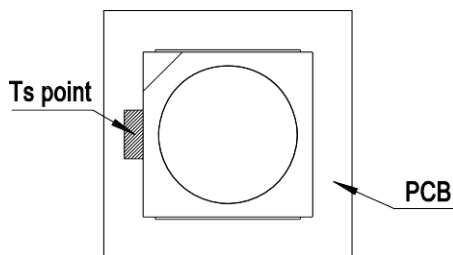

$T_S$  can be easily measured by mounting a thermocouple on the soldering joint as shown in preceding figure, while  $R_{\theta J-S}$  is provided in the data sheet. Verify the  $T_S$  of the LED in the final product to ensure that the LEDs are operating within all maximum ratings stated in the data sheet.

## Eye Safety Precautions

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

## Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2020–2023 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to [www.broadcom.com](http://www.broadcom.com). All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.



Lead (Pb) Free  
RoHS Compliant