


# HDSP-52xE Series, HDSP-52xG Series, HDSP-52xY Series

## 14.2-mm (0.56-inch) General-Purpose Two-Digit Seven-Segment Displays

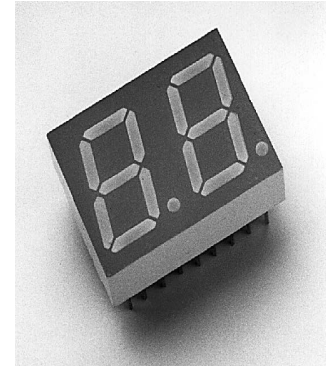

### Description

These Broadcom® 14.2-mm (0.56-inch) two-digit displays use industry-standard size and pinout. The devices are available as either common anode or common cathode. These grayfaced displays are available in a choice of red, green, or yellow colors. The HDSP-521x and HDSP-523x are suitable for indoor use.

### Applications

- Suitable for indoor use
- Not recommended for industrial applications
- Extreme temperature cycling not recommended

**NOTE:** For additional details, contact your local Broadcom sales office or an authorized distributor.


### Features

- Industry-standard size
- Industry-standard pinout 15.24-mm (0.6-in.) DIP leads on 2.54-mm (0.1-in.) centers
- Choice of colors
  - Red, green, and yellow
- Excellent appearance
  - Mitered font
  - Mitered corners on segments
  - Gray face paint
  - Gray package gives optimum contrast
  - ±50° viewing angle
- Design flexibility
  - Common anode or common cathode
- Categorized for luminous intensity
  - Green and yellow categorized for color

### Devices

| Red       | Green     | Yellow    | Description                       |
|-----------|-----------|-----------|-----------------------------------|
| HDSP-521E | HDSP-521G | HDSP-521Y | Common Anode Right Hand Decimal   |
| HDSP-523E | HDSP-523G | HDSP-523Y | Common Cathode Right Hand Decimal |

# Package Dimensions

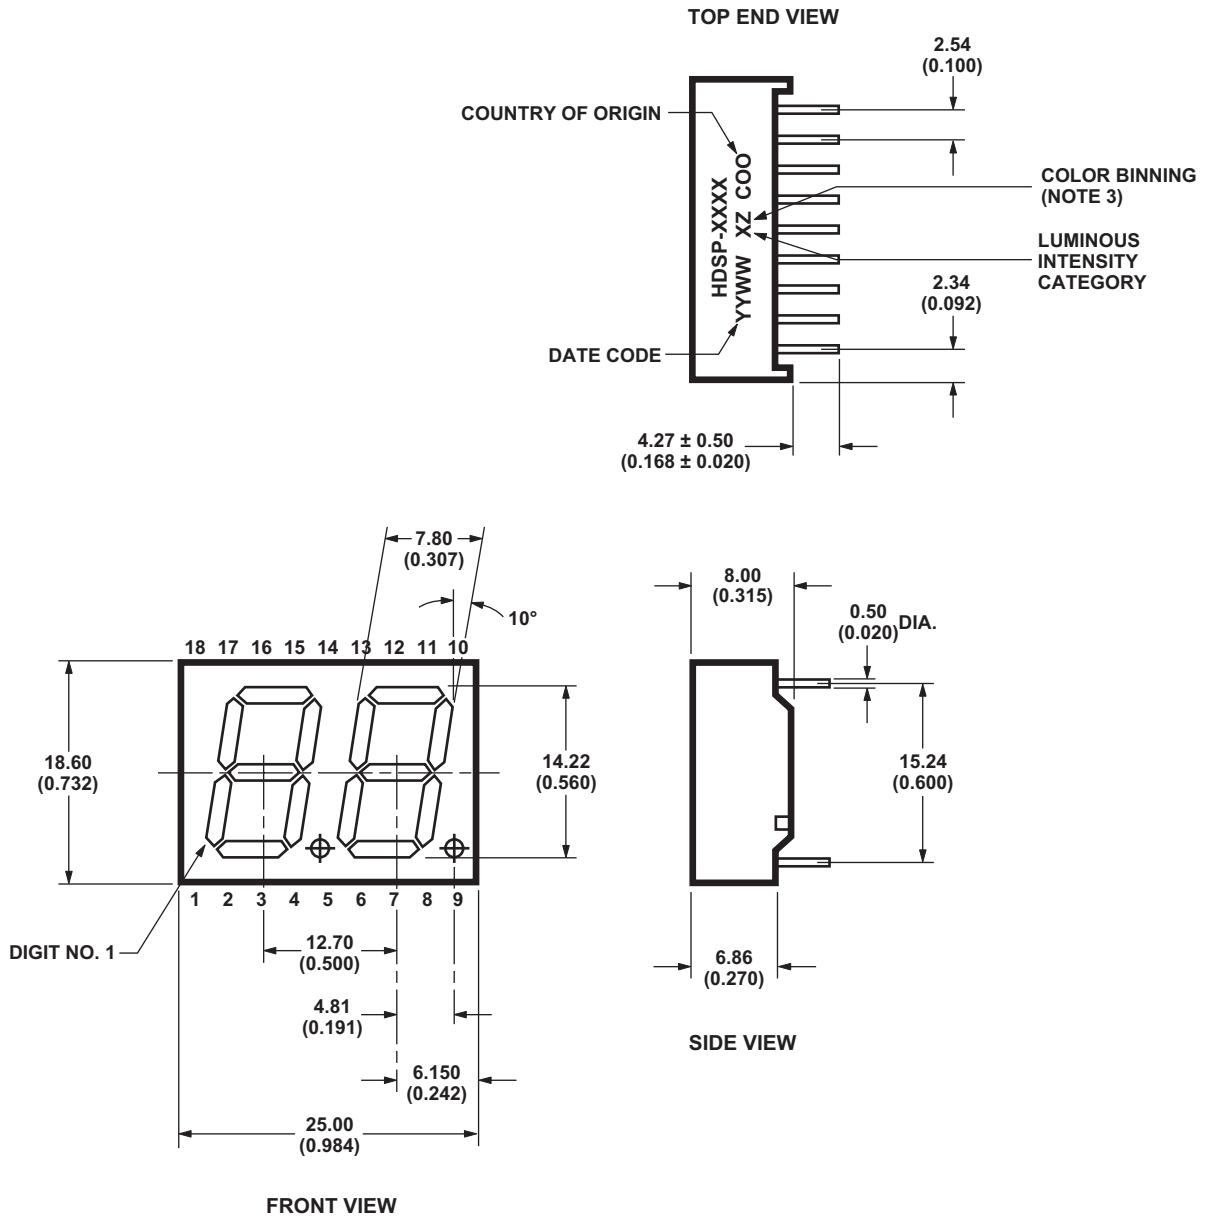


**NOTE:**


1. All dimensions are in millimeters (inches).
2. Tolerance is 0.25 mm (0.01 in.) unless otherwise stated.
3. For green and yellow only.

# Internal Circuit Diagram

## Common Anode

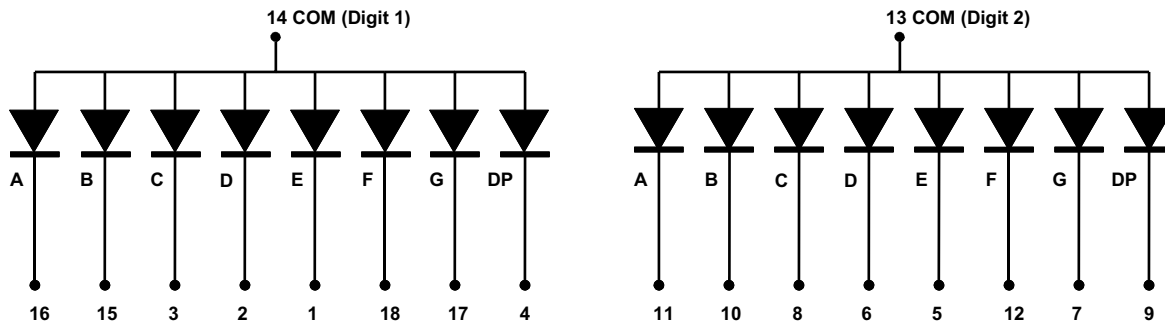

## Common Cathode

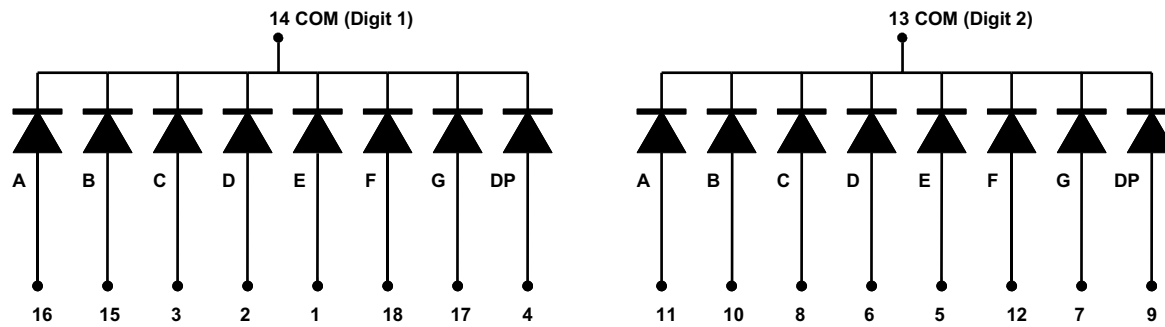

| Common Anode |                   | Common Cathode |                     |
|--------------|-------------------|----------------|---------------------|
| Pin          | Function          | Pin            | Function            |
| 1            | E CATHODE NO. 1   | 1              | E ANODE NO. 1       |
| 2            | D CATHODE NO. 1   | 2              | D ANODE NO. 1       |
| 3            | C CATHODE NO. 1   | 3              | C ANODE NO. 1       |
| 4            | DP CATHODE NO. 1  | 4              | DP ANODE NO. 1      |
| 5            | E CATHODE NO. 2   | 5              | E ANODE NO. 2       |
| 6            | D CATHODE NO. 2   | 6              | D ANODE NO. 2       |
| 7            | G CATHODE NO. 2   | 7              | G ANODE NO. 2       |
| 8            | C CATHODE NO. 2   | 8              | C ANODE NO. 2       |
| 9            | DP CATHODE NO. 2  | 9              | DP ANODE NO. 2      |
| 10           | B CATHODE NO. 2   | 10             | B ANODE NO. 2       |
| 11           | A CATHODE NO. 2   | 11             | A ANODE NO. 2       |
| 12           | F CATHODE NO. 2   | 12             | F ANODE NO. 2       |
| 13           | DIGIT NO. 2 ANODE | 13             | DIGIT NO. 2 CATHODE |
| 14           | DIGIT NO. 1 ANODE | 14             | DIGIT NO. 1 CATHODE |
| 15           | B CATHODE NO. 1   | 15             | B ANODE NO. 1       |
| 16           | A CATHODE NO. 1   | 16             | A ANODE NO. 1       |
| 17           | G CATHODE NO. 1   | 17             | G ANODE NO. 1       |
| 18           | F CATHODE NO. 1   | 18             | F ANODE NO. 1       |

## Absolute Maximum Ratings at $T_A = 25^\circ\text{C}$

| Parameter  | Red<br>HDSP-521E<br>HDSP-523E | Green<br>HDSP-521G<br>HDSP-523G | Yellow<br>HDSP-521Y<br>HDSP-523Y | Unit |
|--|-------------------------------|---------------------------------|----------------------------------|------|
| Power Dissipation per Segment or DP  | 62.5                          | 62.5                            | 50                               | mW   |
| Peak Forward Current per Segment or DP <sup>a</sup>                          | 90                            | 90                              | 60                               | mA   |
| DC Forward Current per Segment or DP   | 25 <sup>b</sup>               | 25 <sup>c</sup>                 | 20 <sup>d</sup>                  | mA   |
| Operating Temperature Range  | -40 to +85                    | -40 to +85                      | -40 to +85                       | °C   |
| Storage Temperature Range  | -40 to +85                    | -40 to +85                      | -40 to +85                       | °C   |
| Reverse Voltage per Segment or DP <sup>e</sup>                               | 5                             | 5                               | 5                                | V    |
| Wave Soldering Temperature for 3 Seconds<br>(at 2-mm distance from the body) | 250                           | 250                             | 250                              | °C   |

a. Duty factor = 10%, frequency = 1 kHz,  $T_A = 25^\circ\text{C}$ .

b. Derate linearly as shown in [Figure 4](#).

c. Derate linearly as shown in [Figure 8](#).

d. Derate linearly as shown in [Figure 12](#).

e. Reverse Voltage is for LED testing purposes and is not recommended to be used as an application condition.

## Electrical/Optical Characteristics at $T_A = 25^\circ\text{C}$

| Parameter  | Symbol      | Min. | Typ. | Max. | Units | Test Conditions          |
|--|-------------|------|------|------|-------|--------------------------|
| <b>Red (HDSP-521E, HDSP-523E)</b>                                      |             |      |      |      |       |                          |
| Luminous Intensity/Segment<br>(Average per Segment) <sup>a, b, c</sup> | $I_V$       | 5.13 | 7.30 | —    | mcd   | $I_F = 10\text{ mA}$     |
| Forward Voltage/Segment or DP <sup>d</sup>                             | $V_F$       | —    | 1.95 | 2.50 | V     | $I_F = 20\text{ mA}$     |
| Peak Wavelength  | $\lambda_P$ | —    | 633  | —    | nm    |                          |
| Dominant Wavelength <sup>e</sup>                                       | $\lambda_d$ | —    | 622  | —    | nm    |                          |
| Reverse Voltage/Segment or DP <sup>f</sup>                             | $V_R$       | 5    | —    | —    | V     | $I_R = 100\ \mu\text{A}$ |
| <b>Green (HDSP-521G, HDSP-523G)</b>                                    |             |      |      |      |       |                          |
| Luminous Intensity/Segment<br>(Average per Segment) <sup>a, b, c</sup> | $I_V$       | 2.28 | 4.30 | —    | mcd   | $I_F = 10\text{ mA}$     |
| Forward Voltage/Segment or DP <sup>d</sup>                             | $V_F$       | —    | 2.10 | 2.50 | V     | $I_F = 20\text{ mA}$     |
| Peak Wavelength  | $\lambda_P$ | —    | 572  | —    | nm    |                          |
| Dominant Wavelength <sup>e</sup>                                       | $\lambda_d$ | —    | 570  | —    | nm    |                          |
| Reverse Voltage/Segment or DP <sup>f</sup>                             | $V_R$       | 5    | —    | —    | V     | $I_R = 100\ \mu\text{A}$ |

| Parameter   | Symbol      | Min. | Typ. | Max. | Units | Test Conditions                 |
|---|-------------|------|------|------|-------|---------------------------------|
| <b>Yellow (HDSP-521Y, HDSP-523Y)</b>                                |             |      |      |      |       |                                 |
| Luminous Intensity/Segment (Average per Segment) <sup>a, b, c</sup> | $I_V$       | 2.28 | 2.70 | —    |       | $I_F = 10 \text{ mA}$           |
| Forward Voltage/Segment or DP <sup>d</sup>                          | $V_F$       | —    | 2.10 | 2.50 | V     | $I_F = 20 \text{ mA}$           |
| Peak Wavelength   | $\lambda_P$ | —    | 592  | —    | nm    |                                 |
| Dominant Wavelength <sup>e</sup>                                    | $\lambda_d$ | —    | 588  | —    | nm    |                                 |
| Reverse Voltage/Segment or DP <sup>f</sup>                          | $V_R$       | 5    | —    | —    | V     | $I_R = 100 \text{ }\mu\text{A}$ |

- a. The luminous intensity,  $I_V$ , is measured at the mechanical axis of the package.
- b. The optical axis is closely aligned with the mechanical axis of the package.
- c. Tolerance is  $\pm 15\%$ .
- d. Forward voltage tolerance is  $\pm 0.1\text{V}$ .
- e. The dominant wavelength,  $\lambda_d$ , is derived from the CIE Chromaticity Diagram and represents the perceived color of the device.
- f. Reverse voltage is for product testing only. Long-term reverse bias is not recommended for end applications.

## Intensity Bin Limits (mcd at 10 mA)

### Red

| IV Bin Category | Min.  | Max.  |
|-----------------|-------|-------|
| I               | 5.13  | 7.69  |
| J               | 7.69  | 11.54 |
| K               | 11.54 | 17.31 |

Tolerance for each bin limit is  $\pm 15\%$ .

### Green

| IV Bin Category | Min. | Max. |
|-----------------|------|------|
| G               | 2.28 | 3.42 |
| H               | 3.42 | 5.13 |
| I               | 5.13 | 7.69 |

Tolerance for each bin limit is  $\pm 15\%$ .

### Yellow

| IV Bin Category | Min. | Max. |
|-----------------|------|------|
| G               | 2.28 | 3.42 |
| H               | 3.42 | 5.13 |
| I               | 5.13 | 7.69 |

Tolerance for each bin limit is  $\pm 15\%$ .

## Color Categories (Dominant Wavelength)

| Color  | Bin | Dominant Wavelength (nm) |        |
|--------|-----|--------------------------|--------|
|        |     | Min.                     | Max.   |
| Green  | 3   | 570.50                   | 573.50 |
|        | 2   | 573.50                   | 576.50 |
| Yellow | 2   | 587.00                   | 589.50 |
|        | 3   | 584.50                   | 587.00 |

Tolerance for each bin limit is  $\pm 1 \text{ nm}$ .

# Red

Figure 1: Relative Intensity vs. Wavelength

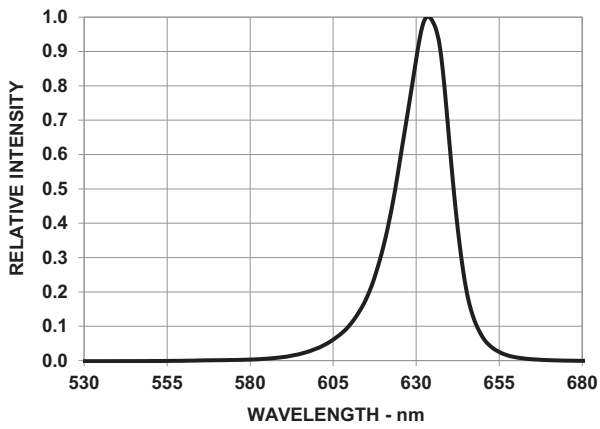


Figure 2: Forward Current vs. Forward Voltage

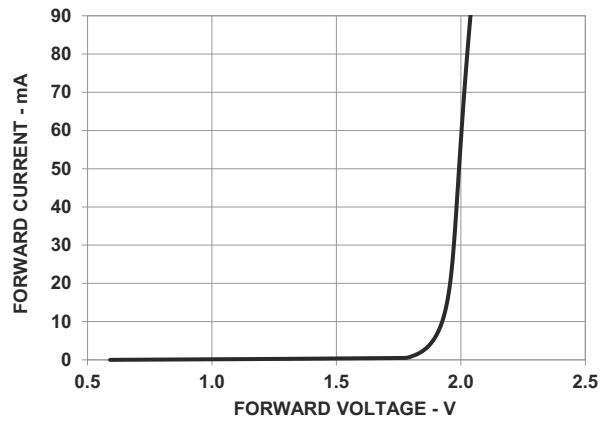


Figure 3: Relative Luminous Intensity vs. Forward Current


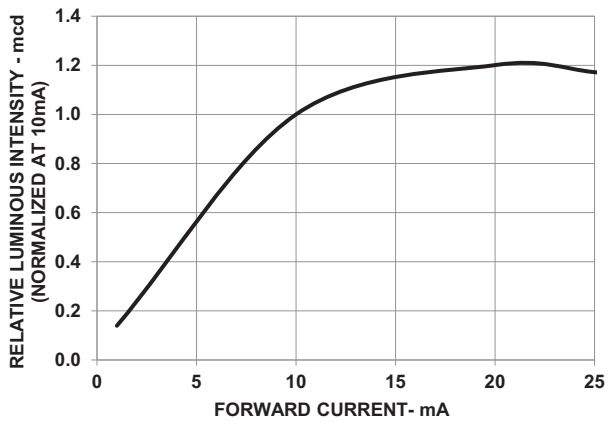


Figure 4: Maximum Forward Current vs. Ambient Temperature

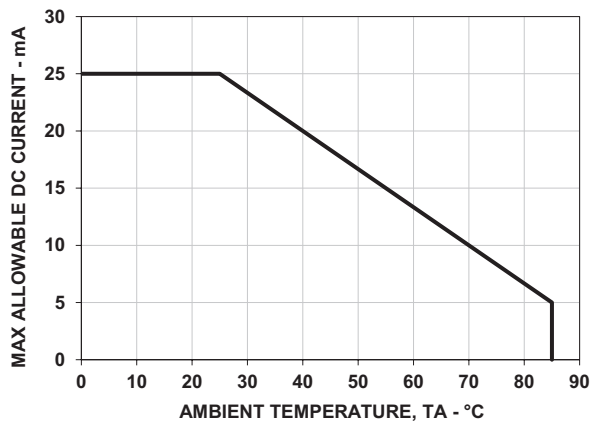

# Green

Figure 5: Relative Intensity vs. Wavelength

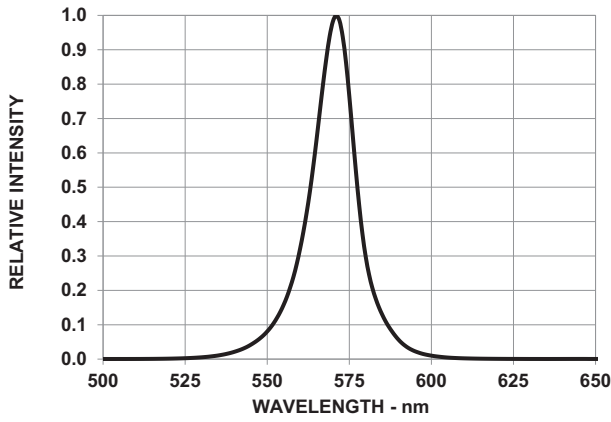


Figure 6: Forward Current vs. Forward Voltage

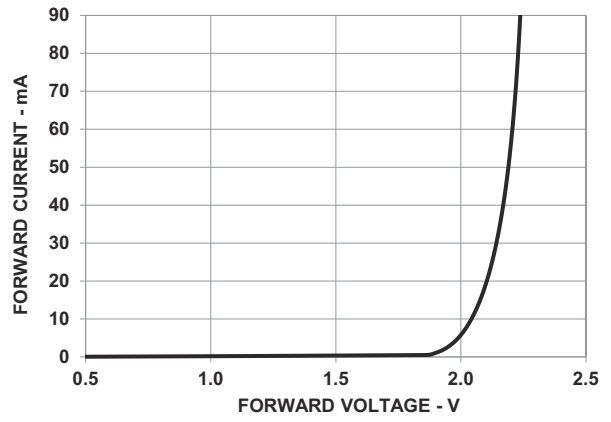


Figure 7: Relative Luminous Intensity vs. Forward Current



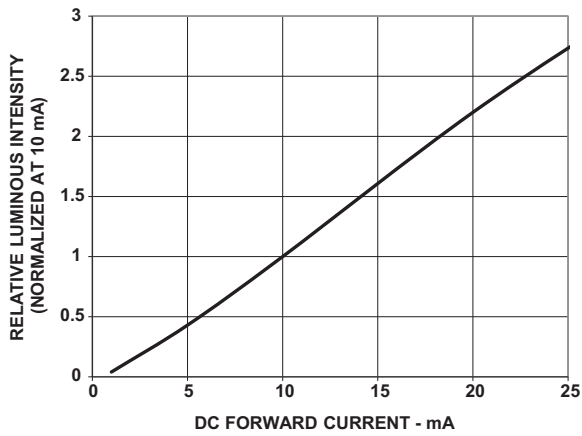


Figure 8: Maximum Forward Current vs. Ambient Temperature

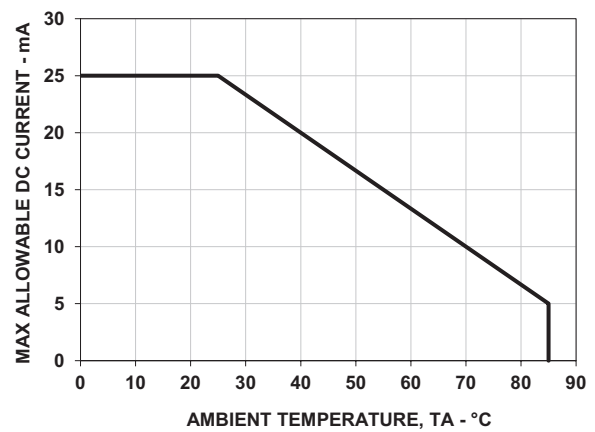


# Yellow


**Figure 9: Relative Intensity vs. Wavelength**

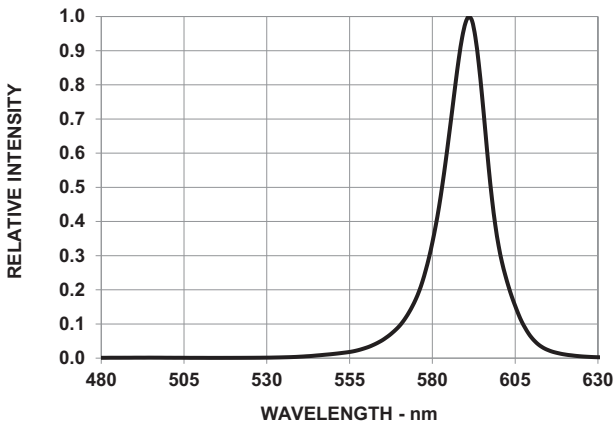


**Figure 10: Forward Current vs. Forward Voltage**

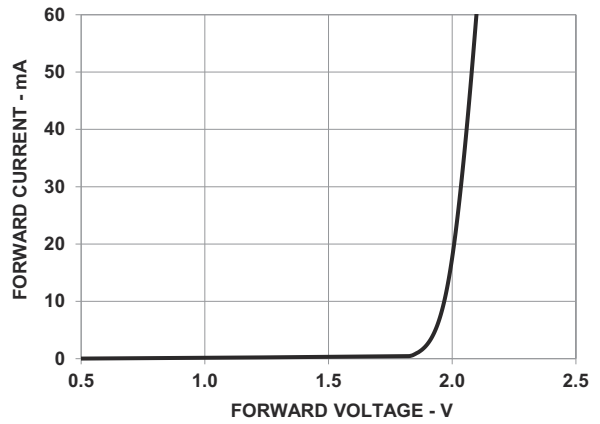

**Figure 11: Relative Luminous Intensity vs. Forward Current**

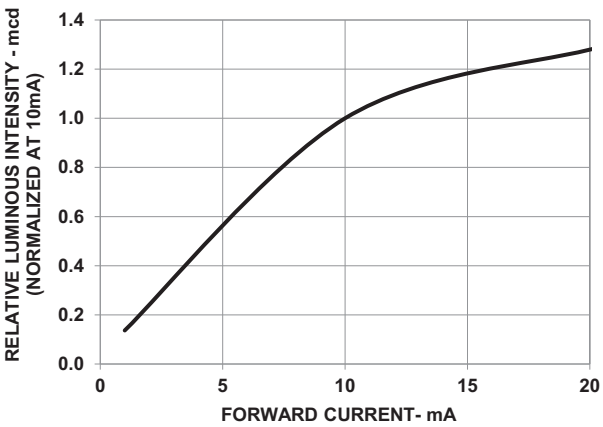

**Figure 12: Maximum Forward Current vs. Ambient Temperature**

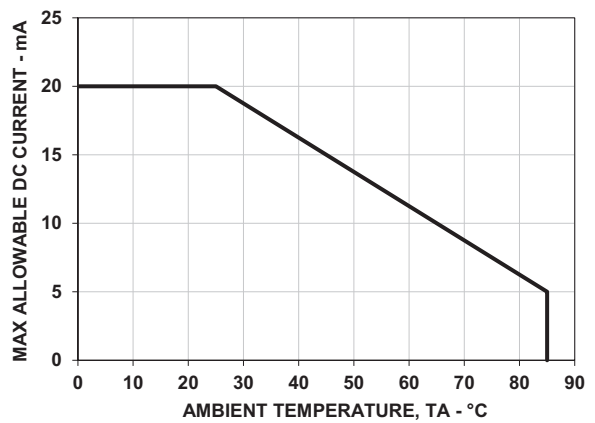



## Precautionary Notes


### Soldering and Handling Precautions

- Set and maintain the wave soldering parameters according to the recommended temperature and dwell time. Perform daily checks on the profile to ensure that it conforms to the recommended conditions. Exceeding these conditions will over-stress the LEDs and cause premature failures.
- Use only bottom preheaters to reduce thermal stress experienced by the LEDs.
- Recalibrate the soldering profile before loading a new type of PCB. A PCB with different size and design (component density) will have different heat capacity and might cause a change in temperature experienced by the PCB if the same wave soldering setting is used.
- Do not perform wave soldering more than once.
- Any alignment fixture used during wave soldering must be loosely fitted and must not apply stress on the LEDs. Use non-metal material as it absorbs less heat during the wave soldering process.
- At elevated temperatures, the LEDs are more susceptible to mechanical stress. Allow the PCB to be sufficiently cooled to room temperature before handling. Do not apply stress to the LED when it is hot.
- Use wave soldering to solder the LED. Use hand soldering only for rework or touch up if unavoidable, but it must be strictly controlled to following conditions:
  - Soldering iron tip temperature = 315°C maximum
  - Soldering duration = 2 seconds maximum
  - Number of cycles = 1 only
  - Power of soldering iron = 50W maximum
- For ESD sensitive devices, apply proper ESD precautions at the soldering station. Use only an ESD-safe soldering iron.
- Do not touch the LED package body with the soldering iron except for the soldering terminals as it may cause damage to the LED.
- Confirm beforehand whether the functionality and performance of the LED are affected by soldering with hand soldering.
- Keep the heat source at least 1.6 mm away from the LED body during soldering.
- Design an appropriate hole size to avoid problems during insertion.
- Do not use cleaning agents from the ketone family (acetone, methyl ethylketone, and so on) and from the chlorinated hydrocarbon family (methylene chloride,

trichloroethylene, carbon tetrachloride, and so on) to clean the LED displays. All of these solvents attack or dissolve the encapsulating epoxies used to form the package of plastic LED parts.

- For the purposes of cleaning, wash with DI water only. Perform the cleaning process at room temperature only. Clear any water or moisture from the LED display immediately after washing.
- Use *No clean* solder paste for soldering.

Figure 13: Recommended Wave Soldering Profile

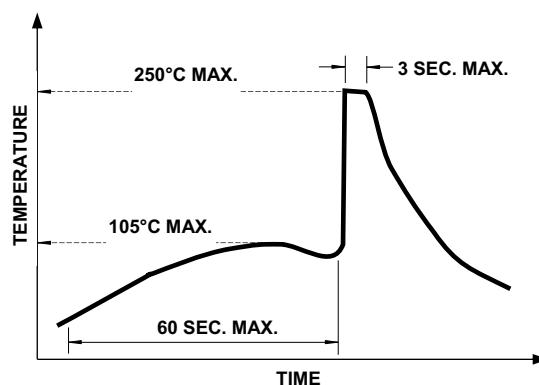

**NOTE:** The measurements are performed with a thermocouple mounted at the bottom of the PCB.

### Application Precautions

- The drive current of the LED must not exceed the maximum allowable limit across temperature as stated in the data sheet. Use constant current driving to ensure consistent performance.
- The circuit design must cater to the entire range of forward voltage ( $V_F$ ) of the LEDs to ensure the intended drive current can always be achieved.
- The LED exhibits slightly different characteristics at different drive currents, which may result in a larger variation of performance (such as intensity, wavelength, and forward voltage). Set the application current as close as possible to the test current to minimize these variations.
- The LED is not intended for reverse bias. Use other appropriate components for such purposes. When driving the LED in matrix form, ensure that the reverse bias voltage does not exceed the allowable limit of the LED.

- Avoid rapid change in ambient temperature, especially in high-humidity environments, because they cause condensation on the LED.
- If the LED is intended to be used in harsh or outdoor environment, protect the LED against damages caused by rain, water, dust, oil, corrosive gases, external mechanical stresses, and so on.

## Eye Safety Precautions

LEDs may pose optical hazards when in operation. Do not look directly at operating LEDs because it might be harmful to the eyes. For safety reasons, use appropriate shielding or personal protective equipment.

## Disclaimer

Broadcom's products and software are not specifically designed, manufactured, or authorized for sale as parts, components, or assemblies for the planning, construction, maintenance, or direct operation of a nuclear facility or for use in medical devices or applications. The customer is solely responsible, and waives all rights to make claims against Broadcom or its suppliers, for all loss, damage, expense, or liability in connection with such use.

Copyright © 2005–2024 Broadcom. All Rights Reserved. The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, go to [www.broadcom.com](http://www.broadcom.com). All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.

