

HLMP-Pxxx Series, HLMP-Qxxx Series, HLMP-6xxx Series, HLMP-70xx Series Subminiature LED Lamps

Description

Flat Top Package

The Broadcom[®] HLMP-Pxxx Series flat top lamps use an untinted, nondiffused, truncated lens to provide a wide radiation pattern that is necessary for use in backlighting applications. The flat top lamps are also ideal for use as emitters in light pipe applications.

Dome Packages

The Broadcom HLMP-6xxx Series dome lamps for use as indicators use a tinted, diffused lens to provide a wide viewing angle with a high on-off contrast ratio. High brightness lamps use an untinted, nondiffused lens to provide a high luminous intensity within a narrow radiation pattern.

Resistor Lamps

The Broadcom HLMP-6xxx Series 5 volt subminiature lamps with built-in current limiting resistors are for use in applications where space is at a premium.

Lead Configurations

All of these devices are made by encapsulating LED chips on axial lead frames to form molded epoxy subminiature lamp packages. A variety of package configuration options is available. These include special surface mount lead configurations, gull wing, yoke lead, or Z-bend. Right angle lead bends at 2.54 mm (0.100 inch) and 5.08mm (0.200 inch) center spacing are available for through hole mounting. For more information, refer to the Standard SMT and Through Hole Lead Bend Options for Subminiature LED Lamps data sheet.

Features

- Subminiature flat top package
 - Ideal for backlighting and light piping applications
- Subminiature dome package
 - Diffused dome for wide viewing angle
 - Nondiffused dome for high brightness
- TTL and LSTTL compatible 5V resistor lamps
- Available in six colors
- Ideal for space limited applications
- Axial leads
- Available with lead configurations for surface mount and through hole PCB mounting




Device Selection Guide

Part Number: HLMP-xxxx




| Standard Red | DH AS AlGaAs Red | High Efficiency Red | Orange | Yellow | High Perf. Green | Emerald Green | Device Description | Device Outline Drawing |
|--------------|------------------|---------------------|--------|--------|------------------|---------------|--|------------------------|
| P005 | P105 | P205 | P405 | P305 | P505 | P605 | Untinted, Nondiffused, Flat Top | A |
| | P102 | P202 | P402 | P302 | P502 | | Untinted, Diffused, Flat Top | A |
| 6000 | Q100 | 6300 | Q400 | 6400 | 6500 | Q600 | Tinted, Diffused | B |
| | Q105 | 6305 | Q405 | 6405 | 6505 | Q605 | Untinted, Nondiffused, High Brightness | B |
| | Q150 | 7000 | | 7019 | 7040 | | Tinted, Diffused, Low Current | B |
| | Q155 | | | | | | Nondiffused, Low Current | B |
| | | 6600 | | | 6800 | | Tinted, Diffused, Resistor, 5V, 10 mA | B |
| | | 6620 | | 6720 | 6820 | | Diffused, Resistor, 5V, 4 mA | B |

Package Dimensions

A. Flat Top Lamps

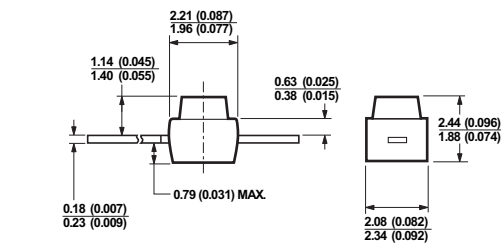

B. Diffused and Nondiffused

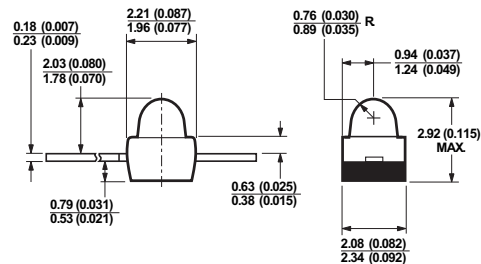


Notes:

All dimensions are in millimeters (inches).

Protruding support tab is connected to cathode lead.

Lead polarity for ALGaAs lamps is opposite to the lead polarity of subminiature lamps using other technologies.

Figure 1: Proper Right Angle Mounting to a PCB to Prevent Protruding Cathode Tab from Shorting to Anode Connection

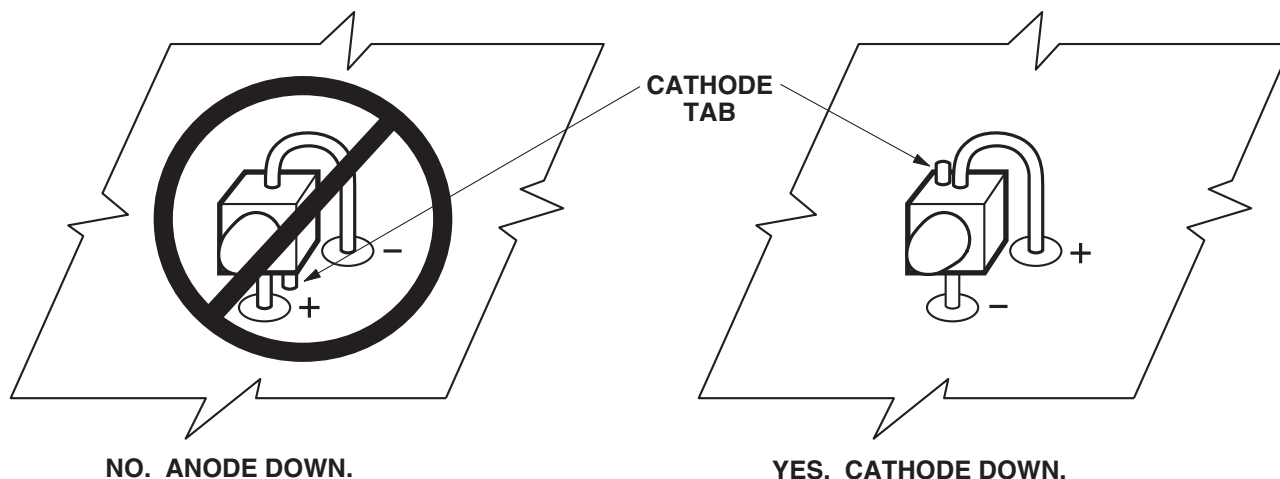

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$)

| Parameter | Standard Red | DH AS AlGaAs Red | High Eff. Red | Orange | Yellow | High Perf. Green | Emerald Green | Unit |
|--|-------------------------------------|------------------|---------------|-------------|-------------|------------------|---------------|------------------|
| DC Forward Current ^a | 50 | 30 | 30 | 30 | 20 | 30 | 30 | mA |
| Peak Forward Current ^b | 1000 | 300 | 90 | 90 | 60 | 90 | 90 | mA |
| DC Forward Voltage (Resistor Lamps Only) | — | — | 6 | — | 6 | 6 | 6 | V |
| Reverse Voltage ($I_R = 100 \mu\text{A}$) | 5 | 5 | 5 | 5 | 5 | 5 | 5 | V |
| Transient Forward Current ^c (10 μs Pulse) | 2000 | 500 | 500 | 500 | 500 | 500 | 500 | mA |
| Operating Temperature Range | | | | | | | | $^\circ\text{C}$ |
| Nonresistor Lamps | -55 to +100 | -40 to +100 | -55 to +100 | -55 to +100 | -55 to +100 | -40 to +100 | -20 to +100 | |
| Resistor Lamps | -40 to +85 | -40 to +85 | -40 to +85 | -40 to +85 | -40 to +85 | -20 to +85 | -20 to +85 | |
| Storage Temperature Range | -55 to +100 | | | | | | | |
| For Through Hole Devices: Wave Soldering Temperature [1.6 mm (0.063 in.) from body] | 260 $^\circ\text{C}$ for 5 seconds | | | | | | | |
| For Surface Mount Devices: Reflow Soldering Temperature | 260 $^\circ\text{C}$ for 20 seconds | | | | | | | |

- See [Figure 6](#) for current derating vs. ambient temperature. Derating is not applicable to resistor lamps.
- Refer to [Figure 7](#) showing Maximum Tolerable Peak Current vs. Pulse Duration to establish pulsed operating conditions.
- The transient peak current is the maximum nonrecurring peak current the device can withstand without failure. Do not operate these lamps at this high current.

Electrical/Optical Characteristics ($T_A = 25^\circ\text{C}$)

Standard Red

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|------|------|------|--------------------|--------------------------------|
| 6000-E00xx | Luminous Intensity | I_V | 0.63 | 1.2 | — | mcd | $I_F = 10\text{ mA}$ |
| 6000-G00xx | | | 1.60 | 3.2 | — | | |
| P005-F00xx | | | 1.0 | 2.5 | — | | |
| All | Forward Voltage | V_F | 1.4 | 1.6 | 2.0 | V | $I_F = 10\text{ mA}$ |
| | Reverse Breakdown Voltage | V_R | 5.0 | 12.0 | — | V | $I_R = 100\text{ }\mu\text{A}$ |
| 6000 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 90 | — | Deg. | |
| P005 | | | — | 125 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 655 | — | nm | |
| | Dominant Wavelength | λ_d | — | 640 | — | nm | |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 24 | — | nm | |
| | Speed of Response | τ_s | — | 15 | — | ns | |
| | Capacitance | C | — | 100 | — | pF | $V_F = 0$; $f = 1\text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | $^\circ\text{C/W}$ | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 65 | — | lm/W | |

DH AS AIGaAs Red

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|-----------------|-------|------|----------------------|---|
| P102-F00xx | Luminous Intensity | I_V | 1.0 | 20.0 | — | mcd | $I_F = 20 \text{ mA}$ |
| P105-L00xx | | | 10.0 | 30.0 | — | | |
| P105-NP000 | | | 25 | — | 80 | | |
| Q100-M00xx | | | 16 | 45 | — | | |
| Q100-N00xx | | | 25.0 | 45.0 | — | | |
| Q100-PQ000 | | | 40 | — | 125 | | |
| Q105-P00xx | | | 40 | 200 | — | | |
| Q105-ST000 | | | 160 | — | 500 | | $I_F = 1 \text{ mA}$ |
| Q150-F00xx | | | 1.0 | 1.8 | — | | |
| Q155-F00xx | | | 1.0 | 4.0 | — | | |
| Q100 | | | Forward Voltage | V_F | — | | |
| Q150/Q155 | — | 1.6 | | | 1.8 | $I_F = 1 \text{ mA}$ | |
| All | Reverse Breakdown Voltage | V_R | 5.0 | 15.0 | — | V | $I_R = 100 \mu\text{A}$ |
| P105 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| Q100/Q150 | | | — | 90 | — | | |
| Q105/Q155 | | | — | 28 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 645 | — | nm | Measured at Peak |
| | Dominant Wavelength | λ_d | — | 637 | — | nm | |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 20 | — | nm | |
| | Speed of Response | τ_s | — | 30 | — | ns | Exponential Time Constant; e^{-t/τ_s} |
| | Capacitance | C | — | 30 | — | pF | $V_F = 0$; $f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | $^{\circ}\text{C/W}$ | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 80 | — | lm/W | |

High Efficiency Red

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|--------------------------|------|------|------|----------------------|------------------------------|
| P202-F00xx | Luminous Intensity | I_V | 1.0 | 5.0 | — | mcd | $I_F = 10 \text{ mA}$ |
| P205-F00xx | | | 1.0 | 8.0 | — | | |
| 6300-F00xx | | | 1.0 | 10.0 | — | | |
| 6300-KL000 | | | 6.3 | — | 20.0 | | |
| 6305-L00xx | | | 10.0 | 40.0 | — | | $I_F = 2 \text{ mA}$ |
| 7000-D00xx | | | 0.4 | 1.0 | — | | |
| 6600-G00xx | | | 1.6 | 5.0 | — | | $V_F = 5.0\text{V}$ |
| 6620-F00xx | | | 1.0 | 2.0 | — | | |
| All | Forward Voltage (Nonresistor Lamps) | V_F | 1.5 | 1.8 | 3.0 | V | $I_F = 10 \text{ mA}$ |
| 6600 | Forward Current (Resistor Lamps) | I_F | — | 9.6 | 13.0 | mA | $V_F = 5.0\text{V}$ |
| 5620 | | | — | 3.5 | 5.0 | | |
| All | Reverse Breakdown Voltage | V_R | 5.0 | 30.0 | — | V | $I_R = 100 \mu\text{A}$ |
| P205 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| 6305 | | | — | 28 | — | | |
| All Diffused | | | — | 90 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 635 | — | nm | Measured at Peak |
| | Dominant Wavelength | λ_d | — | 626 | — | nm | |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 40 | — | nm | |
| | Speed of Response | τ_s | — | 90 | — | ns | |
| | Capacitance | C | — | 11 | — | pF | $V_F = 0; f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{\text{J-PIN}}$ | — | 170 | — | $^{\circ}\text{C/W}$ | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 145 | — | lm/W | |

Orange

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|------|------|------|------|------------------------------|
| P402-F00xx | Luminous Intensity | I_V | 1.0 | 4.0 | — | mcd | $I_F = 10 \text{ mA}$ |
| P405-F00xx | | | 1.0 | 6 | — | | |
| P405-JK000 | | | 4.0 | | 12.5 | | |
| Q400-F00xx | | | 1.0 | 8 | — | | |
| Q405-H00xx | | | 2.5 | 14 | — | | |
| All | Forward Voltage | V_F | 1.5 | 1.9 | 3.0 | V | $I_F = 10 \text{ mA}$ |
| | Reverse Breakdown Voltage | V_R | 5.0 | 30.0 | — | V | $I_R = 100 \mu\text{A}$ |
| P40x | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| Q40x | | | — | 90 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 600 | — | nm | |
| | Dominant Wavelength | λ_d | — | 602 | — | nm | Measured at Peak |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 40 | — | nm | |
| | Speed of Response | τ_s | — | 260 | — | ns | |
| | Capacitance | C | — | 4 | — | pF | $V_F = 0; f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | °C/W | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 380 | — | lm/W | |

Yellow

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|------|------|------|----------------------|------------------------------|
| P302-F00xx | Luminous Intensity | I_V | 1.0 | 3.0 | — | mcd | $I_F = 10 \text{ mA}$ |
| P305-F00xx | | | 1.0 | 4.0 | — | | |
| 6400-F00xx | | | 1.0 | 9.0 | 12.5 | | |
| 6400-JK000 | | | 4.0 | — | — | | |
| 6405-J00xx | | | 3.6 | 20 | — | | |
| 6405-MN0xx | | | 16 | — | 50 | | |
| 7019-D00xx | | | 0.4 | 0.6 | — | | $I_F = 2 \text{ mA}$ |
| 6720-F00xx | | | 0.9 | 2.0 | — | | |
| All | Forward Voltage (Nonresistor Lamps) | V_F | — | 2.0 | 2.4 | V | $I_F = 10 \text{ mA}$ |
| 6720 | Forward Current (Resistor Lamps) | I_F | — | 3.5 | 5.0 | mA | $V_F = 5V$ |
| All | Reverse Breakdown Voltage | V_R | 5.0 | 50.0 | — | V | |
| P305 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| 6405 | | | — | 28 | — | | |
| All Diffused | | | — | 90 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 583 | — | nm | Measured at Peak |
| | Dominant Wavelength | λ_d | — | 585 | — | nm | |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 36 | — | nm | |
| | Speed of Response | τ_s | — | 90 | — | ns | |
| | Capacitance | C | — | 15 | — | pF | $V_F = 0; f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | $^{\circ}\text{C/W}$ | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 500 | — | lm/W | |

High Performance Green

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|------|------|------|------|------------------------------|
| P502-F00xx | Luminous Intensity | I_V | 1.0 | 3.0 | — | mcd | $I_F = 10 \text{ mA}$ |
| P505-F00xx | | | 1.6 | 6.3 | — | | |
| 6500-F00xx | | | 1.0 | 7.0 | — | | |
| 6505-L00xx | | | 10.0 | 40.0 | — | | $I_F = 2 \text{ mA}$ |
| 7040-D00xx | | | 0.4 | 0.6 | — | | |
| 6800-G00xx | | | 1.6 | 5.0 | — | | |
| 6820-F00xx | | | 1.0 | 2.0 | — | | |
| All | Forward Voltage (Nonresistor Lamps) | V_F | — | 2.1 | 2.7 | V | $I_F = 10 \text{ mA}$ |
| 6800 | Forward Current (Resistor Lamps) | I_F | — | 9.6 | 13.0 | mA | $V_F = 5V$ |
| 6820 | | | — | 3.5 | 5.0 | | |
| All | Reverse Breakdown Voltage | V_R | 5.0 | 50.0 | — | V | $I_R = 100 \mu\text{A}$ |
| P505 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| 6505 | | | — | 28 | — | | |
| All Diffused | | | — | 90 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 565 | — | nm | |
| | Dominant Wavelength | λ_d | — | 569 | — | nm | |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 28 | — | nm | |
| | Speed of Response | τ_s | — | 500 | — | ns | |
| | Capacitance | C | — | 18 | — | pF | $V_F = 0; f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | °C/W | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 595 | — | lm/W | |

High Performance Green¹

| Device HLMP- | Parameter | Symbol | Min. | Typ. | Max. | Unit | Test Conditions |
|-----------------|---|-----------------------|------|------|------|----------------------|---------------------------------|
| P605-F00xx | Luminous Intensity | I_V | 1.0 | 1.5 | — | mcd | $I_F = 10 \text{ mA}$ |
| Q600-F00xx | | | 1.0 | 1.5 | — | | |
| Q605-F00xx | | | 1.0 | 7.5 | — | | |
| All | Forward Voltage | V_F | — | 2.2 | 3.0 | V | $I_F = 10 \text{ mA}$ |
| | Reverse Breakdown Voltage | V_R | 5.0 | — | — | V | $I_R = 100 \mu\text{A}$ |
| P605 | Included Angle Between Half Intensity Points | $2\theta_{1/2}$ | — | 125 | — | Deg. | |
| Q60x | | | — | 90 | — | | |
| All | Peak Wavelength | λ_{PEAK} | — | 558 | — | nm | |
| | Dominant Wavelength | λ_d | — | 560 | — | nm | Measured at Peak |
| | Spectral Line Half Width | $\Delta\lambda_{1/2}$ | — | 24 | — | nm | |
| | Speed of Response | τ_s | — | 3100 | — | ns | |
| | Capacitance | C | — | 35 | — | pF | $V_F = 0$; $f = 1 \text{ MHz}$ |
| | Thermal Resistance | $R\theta_{J-PIN}$ | — | 170 | — | $^{\circ}\text{C/W}$ | Junction-to-Cathode Lead |
| | Luminous Efficacy | η_V | — | 656 | — | lm/W | |

1. For information comparing standard green and emerald green light output degradation, refer to the *Luminous Intensity Degradation Data for Emerald Green LEDs (560 nm) vs. Degradation Data for Standard Green LEDs (569 nm) Application Note*.

Figure 2: Relative Intensity vs. Wavelength

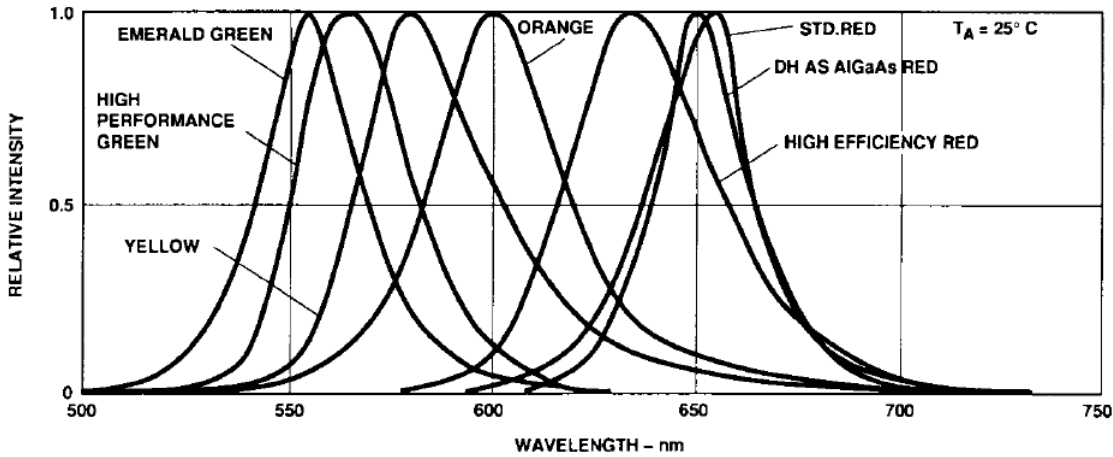


Figure 3: Forward Current vs. Forward Voltage (Nonresistor Lamp)

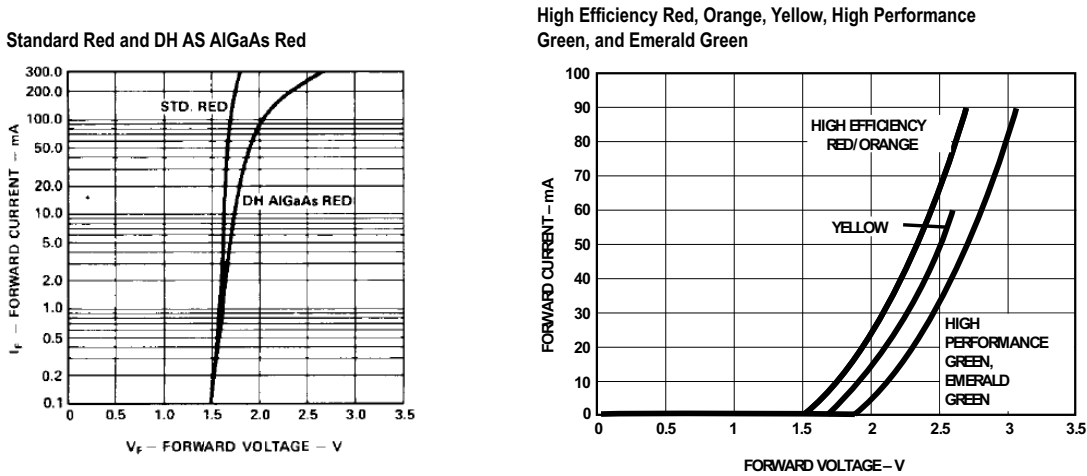


Figure 4: Relative Luminous Intensity vs. Forward Current (Nonresistor Lamp)

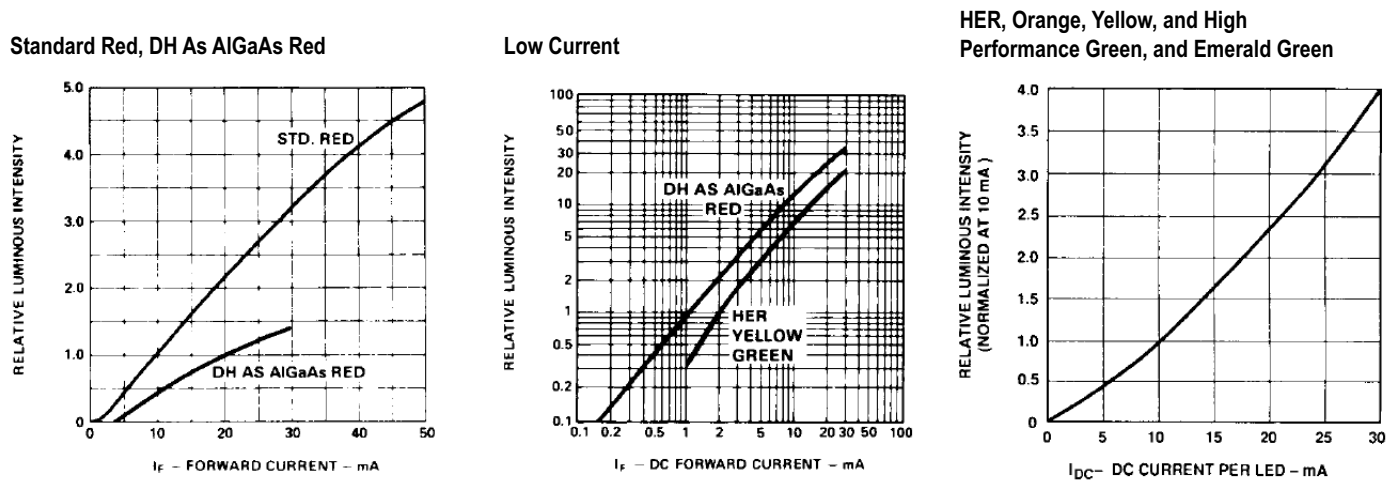


Figure 5: Relative Efficiency (Luminous Intensity per Unit Current) vs. Peak Current (Nonresistor Lamps)

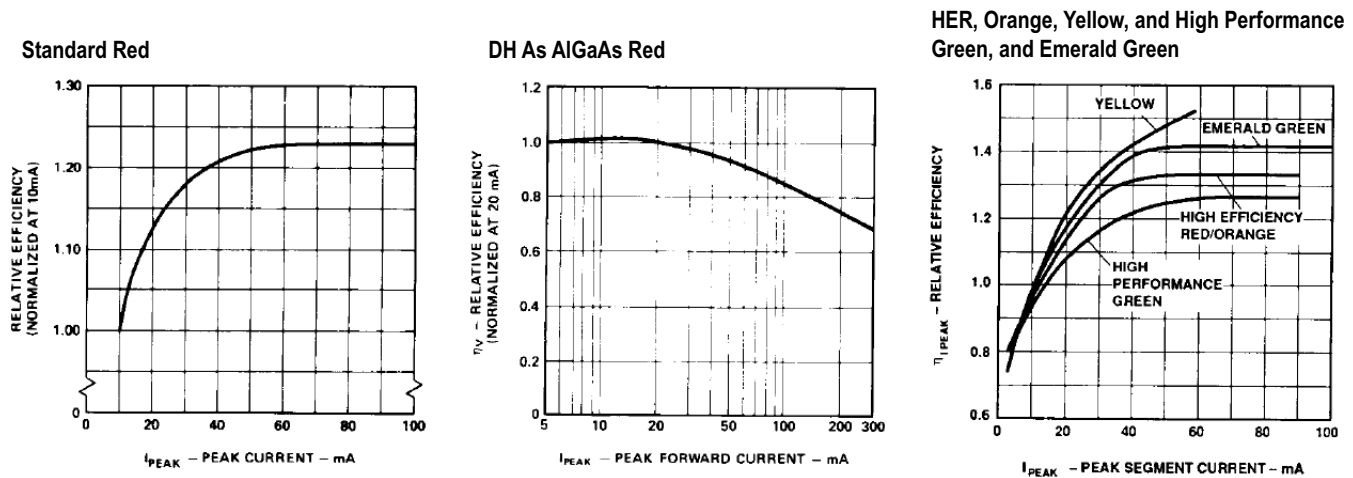


Figure 6: Maximum Forward DC Current vs. Ambient Temperature (Derating Based on T_J Max. = 110°C [Nonresistor Lamps])

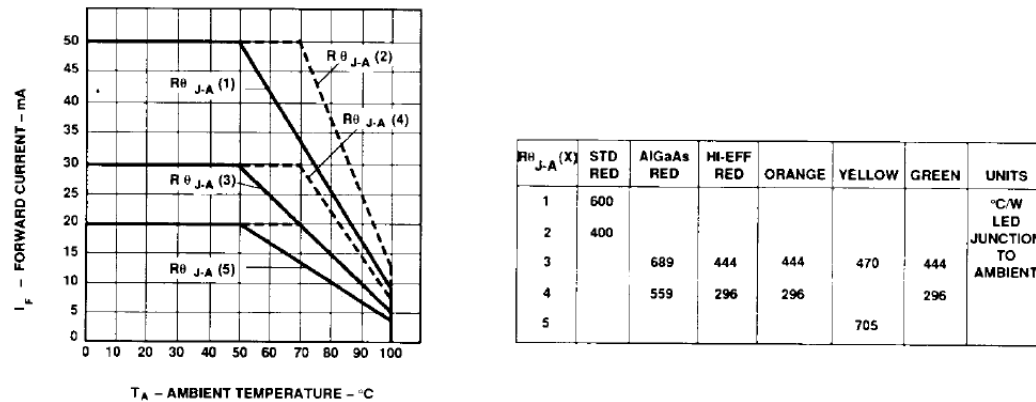


Figure 7: Maximum Tolerable Peak Current vs. Pulse Duration (I_{DC} Max. as per Max. Ratings) (Nonresistor Lamps)

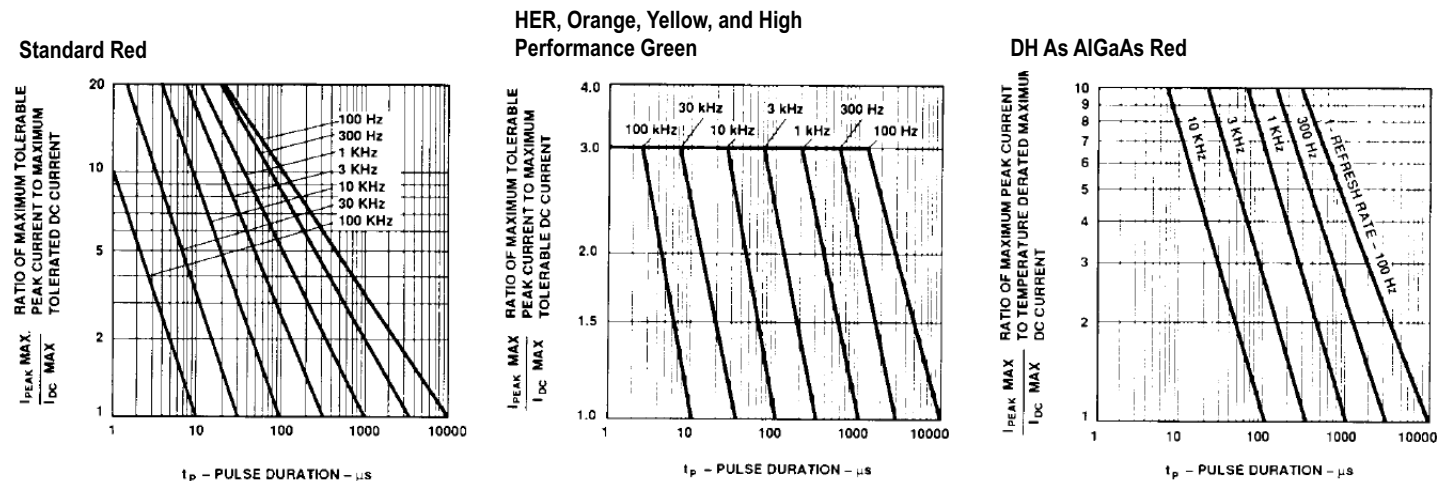


Figure 8: Resistor Lamp Forward Current vs. Forward Voltage

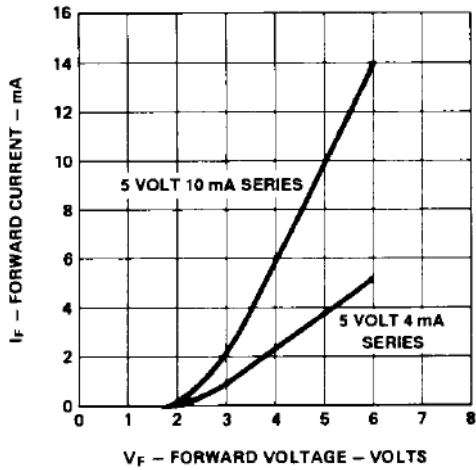


Figure 9: Resistor Lamp Luminous Intensity vs. Forward Voltage


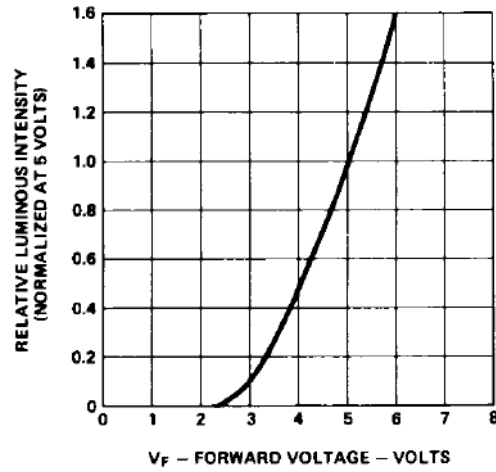


Figure 10: Relative Intensity vs. Angular Displacement

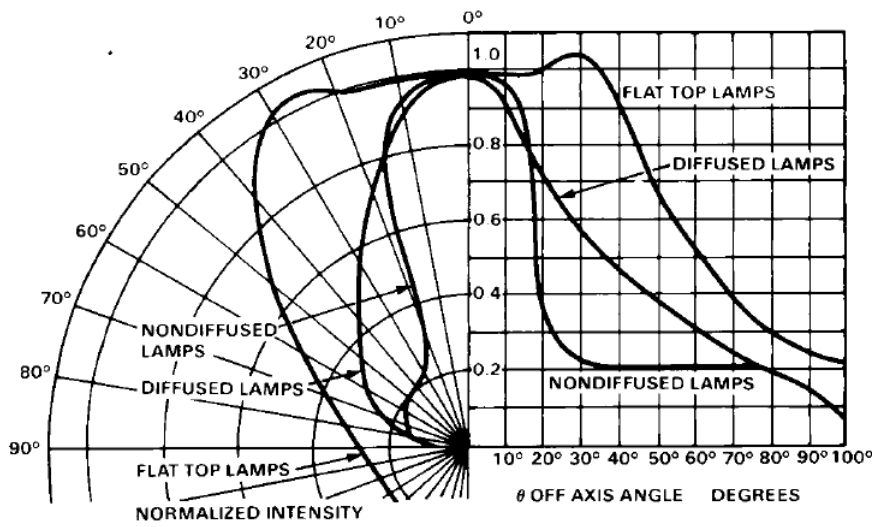

Part Numbering System

H L M x - X X X X -

| | | | | |
|----------------|----------------|----------------|----------------|----------------|
| X ₁ | X ₂ | X ₃ | X ₄ | X ₅ |
|----------------|----------------|----------------|----------------|----------------|

| Number | Description |
|---------------------------------|------------------------------------|
| HLMx-XXXX | 4 x 4 Product Part Number |
| X ₁ | Minimum I _V Bin Options |
| X ₂ | Maximum I _V Bin Options |
| X ₃ | Color Bin Selection |
| X ₄ , X ₅ | Packaging Option |

Intensity Bin Limits

| Bin | Min. | Max. |
|-----|---------|---------|
| A | 0.10 | 0.20 |
| B | 0.16 | 0.32 |
| C | 0.25 | 0.50 |
| D | 0.40 | 0.80 |
| E | 0.63 | 1.25 |
| F | 1.00 | 2.00 |
| G | 1.60 | 3.20 |
| H | 2.50 | 5.00 |
| J | 4.00 | 8.00 |
| K | 6.30 | 12.50 |
| L | 10.00 | 20.00 |
| M | 16.00 | 32.00 |
| N | 25.00 | 50.00 |
| P | 40.00 | 80.00 |
| Q | 63.00 | 125.00 |
| R | 100.00 | 200.00 |
| S | 160.00 | 320.00 |
| T | 250.00 | 500.00 |
| U | 400.00 | 800.00 |
| V | 630.00 | 1250.00 |
| W | 1000.00 | 2000.00 |
| X | 1600.00 | 3200.00 |
| Y | 2500.00 | 5000.00 |

Color Bin Limits

| Package | Bin | Min. | Max. |
|---------------|-------|-------------------|-------|
| Emerald Green | 0 | Full Distribution | |
| | 9 | 552 | 556 |
| | 8 | 555 | 559 |
| | 7 | 558 | 562 |
| | 6 | 561 | 565 |
| Green | 0 | Full Distribution | |
| | 6 | 561 | 565 |
| | 5 | 564 | 568 |
| | 4 | 567 | 571 |
| | 3 | 570 | 574 |
| Yellow | 2 | 573 | 577 |
| | 0 | Full Distribution | |
| | 1 | 581.5 | 585.0 |
| | 2 | 584.0 | 587.5 |
| | 3 | 586.5 | 590.0 |
| | 4 | 589.0 | 592.5 |
| | 5 | 591.5 | 593.5 |
| | 6 | 591.5 | 595.0 |
| 7 | 594.0 | 597.5 | |
| Orange | 0 | Full Distribution | |
| | 1 | 596.5 | 600.0 |
| | 2 | 599.0 | 602.5 |
| | 3 | 601.5 | 604.0 |
| | 4 | 603.8 | 608.2 |
| | 5 | 606.8 | 611.2 |
| | 6 | 609.8 | 614.2 |
| | 7 | 612.8 | 617.2 |
| | 8 | 615.8 | 620.2 |

Mechanical Option

| | |
|----|---|
| 00 | Straight Leads, Bulk Packaging, Quantity of 500 Parts |
| 10 | Right Angle Housing, Bulk Packaging, Quantity of 500 Parts |
| 11 | Gull Wing Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel |
| 12 | Gull Wing Lead, Bulk Packaging, Quantity of 500 Parts |
| 14 | Gull Wing Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel |
| 21 | Yoke Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel |
| 22 | Yoke Leads, Bulk Packaging, Quantity of 500 Parts |
| 24 | Yoke Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel |
| 31 | Z-Bend Leads, 12 mm Tape on 7 in. Dia. Reel, 1500 Parts per Reel |
| 32 | Z-Bend Leads, Bulk Packaging, Quantity of 500 Parts |
| 34 | Z-Bend Leads, 12 mm Tape on 13 in. Dia. Reel, 6000 Parts per Reel |
| 1L | 2.54 mm (0.100 inch) Center Lead Spacing, Long Leads; 10.4 mm (0.410 in.) |
| 1S | 2.54 mm (0.100 inch) Center Lead Spacing, Short Leads; 3.7 mm (0.145 in.) |
| 2L | 5.08 mm (0.200 inch) Center Lead Spacing, Long Leads; 10.4 mm (0.410 in.) |
| 2S | 5.08 mm (0.200 inch) Center Lead Spacing, Short Leads; 3.7 mm (0.145 in.) |

NOTE: All categories are established for classification of products. Products might not be available in all categories. Contact your Broadcom representative for further clarification/information.

Broadcom, the pulse logo, Connecting everything, Avago Technologies, Avago, and the A logo are among the trademarks of Broadcom and/or its affiliates in the United States, certain other countries, and/or the EU.

Copyright © 2017-2020 Broadcom. All Rights Reserved.

The term “Broadcom” refers to Broadcom Inc. and/or its subsidiaries. For more information, please visit www.broadcom.com.

Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.