



# MegaRAID<sup>®</sup> SAS 9265-8i RAID Controller

## Quick Installation Guide

49754-00, Revision A  
December 2010



49754-00A

## Revision History

---

Version and Date	Description of Changes
49754-00 Rev. A, December 2010	Initial release of document.

LSI and the LSI logo are trademarks or registered trademarks of LSI Corporation or its subsidiaries. All other brand and product names may be trademarks of their respective companies.

This document contains proprietary information of LSI Corporation. The information contained herein is not to be used by or disclosed to third parties without the express written permission of LSI Corporation.

**Corporate Headquarters**  
Milpitas, CA  
800-372-2447

**Email**  
[globalsupport@lsi.com](mailto:globalsupport@lsi.com)

**Website**  
[www.lsi.com](http://www.lsi.com)

Document Number: 49754-00 Rev. A  
Copyright © 2010 LSI Corporation  
All Rights Reserved

# Quick Installation Guide

## MegaRAID SAS 9265-8i RAID Controller

Thank you for purchasing the LSI™ MegaRAID® 6Gb/s SAS 9265-8i RAID controller. Your MegaRAID controller provides reliability, high performance, and fault-tolerant drive subsystem management. Before you install your RAID controller, please take a few minutes to read this quick installation guide. If you need more information about any topic covered in this guide, refer to the related documents on your *MegaRAID Universal Software Suite* CD.

### Product Overview

The MegaRAID SAS 9265-8i RAID controller is a PCI-Express, low-profile RAID controller that offers a 6 Gb/s transfer rate. It controls eight internal SAS/SATA ports through two SFF-8087 mini SAS 4i internal connectors.

The MegaRAID SAS 9265-8i RAID controller has a TMM02 unit, which is an on-board 512-MB or 1-GB non-volatile DDR3 1333MT/s transportable memory module. The TMM02 unit connects remotely to the LSI intelligent Battery Backup Unit 09 (LSIiBBU09). For more information about the LSIiBBU09 unit, refer to the **MegaRAID LSIiBBU09 Intelligent Battery Backup Unit Quick Installation Guide** on the *MegaRAID Universal Software Suite* CD.

[Figure 1](#) shows the MegaRAID SAS 9265-8i RAID controller.

**Figure 1: MegaRAID SAS 9265-8i RAID Controller**



---

**NOTE:** Record your controller serial number in a safe location in case you need to contact LSI.

---

---

**NOTE:** SATA II is the only type of SATA supported by this RAID controller.

---

## Installing the Controller

---



Back up your data before changing your system configuration. Otherwise, you might lose data.

### 1. Unpack the RAID Controller

Unpack the RAID controller in a static-free environment. Remove it from the antistatic bag, and inspect it for damage. If the RAID controller appears to be damaged, or if the *MegaRAID Universal Software Suite* CD is missing, contact LSI or your MegaRAID OEM support representative.

The CD contains utility programs, device drivers for various operating systems, and the following documentation:

- **MegaRAID 6Gb/s SAS RAID Controllers User Guide**
- **MegaRAID SAS Software User Guide**
- **MegaRAID SAS Device Driver Installation User's Guide**
- **Cache Backup Products for MegaRAID SAS RAID Controllers User Guide**
- **MegaRAID LSiBBU09 Intelligent Battery Backup Unit Quick Installation Guide**
- Software license agreement

### 2. Prepare the Computer

Turn off the computer, and unplug the power cords from the rear of the power supply. Remove the cover from the computer.

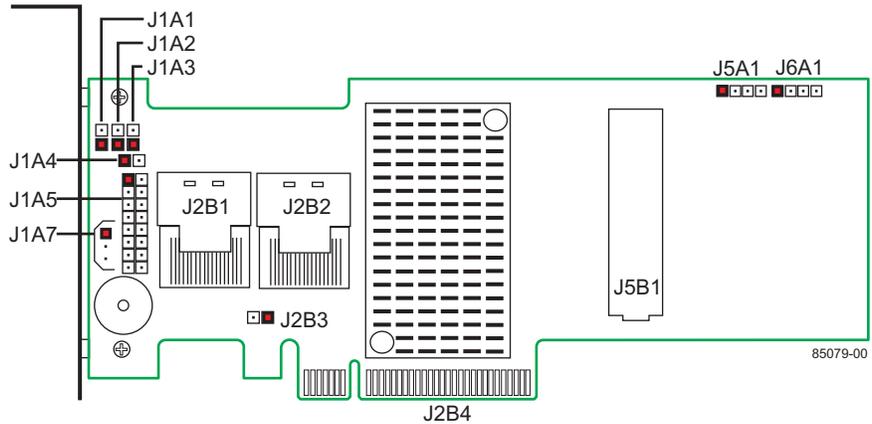


Before you install the RAID controller, make sure that the computer is disconnected from the power and from any networks.

### 3. Review the Jumpers and the Connectors

[Figure 2](#) shows the location of the jumpers and the connectors on the RAID controller. The jumpers are set at the factory, and you usually do not need to change them.




**Figure 2: Layout of the MegaRAID SAS 9265-8i RAID Controller**



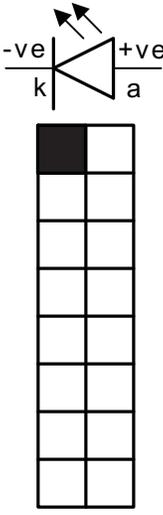

**NOTE:** Pin 1 on the headers and connectors is highlighted in red in [Figure 2](#).

[Table 1](#) describes the jumpers and the connectors on the RAID controller.

**Table 1: Jumpers and Connectors**

Jumper/ Connector	Type	Description
J1A1	Global drive fault LED header 	2-pin connector Connects to an LED that indicates whether a drive is in a fault condition.
J1A2	Write pending LED header 	2-pin connector Connects to an LED that indicates when the data in the cache has yet to be written to the storage devices. Used when the write-back feature is enabled.
J1A3	LSI Test header	2-pin connector Reserved for internal use.
J1A4	Activity LED header 	2-pin connector Connects to an LED that indicates activity on the drives connected to the controller.

**Table 1: Jumpers and Connectors (Continued)**

Jumper/Connector	Type	Description
J1A5	Individual PHY and Drive Fault Indication header Ports 3-0 Ports 7-4  J1A5	2x8-pin header Connects to an LED that indicates whether a drive is in a fault condition. There is one LED per port. When lit, each LED indicates the corresponding drive has failed or is in the Unconfigured-Bad state. The LEDs function in a direct-attach configuration (there are no SAS expanders). Direct attach is defined as a maximum of one drive connected directly to each port.
J1A7	I <sup>2</sup> C Enclosure Management connector  J1A7	3-pin connector Supports SES (SCSI enclosure services) over I <sup>2</sup> C through an internal I <sup>2</sup> C backplane cable.
J1B1	Serial EEPROM (SBR)	2-pin connector Provides controller information, such as the serial number, revision, and manufacturing date. The default is no shunt installed.
J2B1	x4 SAS Ports 0-3 internal connector	SFF-8087 mini SAS 4i internal connector Connects the controller by cable to SAS drives or SATA 2 drives.
J2B2	x4 SAS Ports 4-7 internal connector	SFF-8087 mini SAS 4i internal connector Connects the controller by cable to SAS drives or SATA 2 drives.
J2B3	Advanced Software Hardware Key header	3-pin header Enables support for selected advanced features, such as recovery, CacheCade, FastPath, and SafeStore disk encryption.

**Table 1: Jumpers and Connectors (Continued)**

Jumper/Connector	Type	Description
J2B4	Standard edge card connector	The RAID controller interfaces with the host system through a standard edge card. This interface provides power to the board and an I <sup>2</sup> C interface connected to the I <sup>2</sup> C bus for IPMI.
J5A1	Serial Universal Asynchronous Receiver/Transmitter (UART) connector for the Expander	4-pin connector Reserved for LSI use.
J5B1	TMM02 DDR3 connector	240-pin connector Connects the controller to the transportable memory module. The TMM02 unit connects to a remote LSiBBU09 intelligent battery backup unit.
J6A1	Serial Universal Asynchronous Receiver/Transmitter (UART) connector for the Expander	4-pin connector Reserved for LSI use.

#### 4. Install the RAID Controller

Insert the controller into a PCI Express slot on the motherboard, as shown in [Figure 3](#). Press down gently, but firmly, to seat the controller correctly in the slot. Secure the controller to the computer chassis with the bracket screw.

---

**NOTE:** This controller is a PCI Express x8 card and it can operate in x8 or x16 slots. However, some PCIe slots support only PCIe graphics cards; if a RAID controller is installed, the card will not function.

---

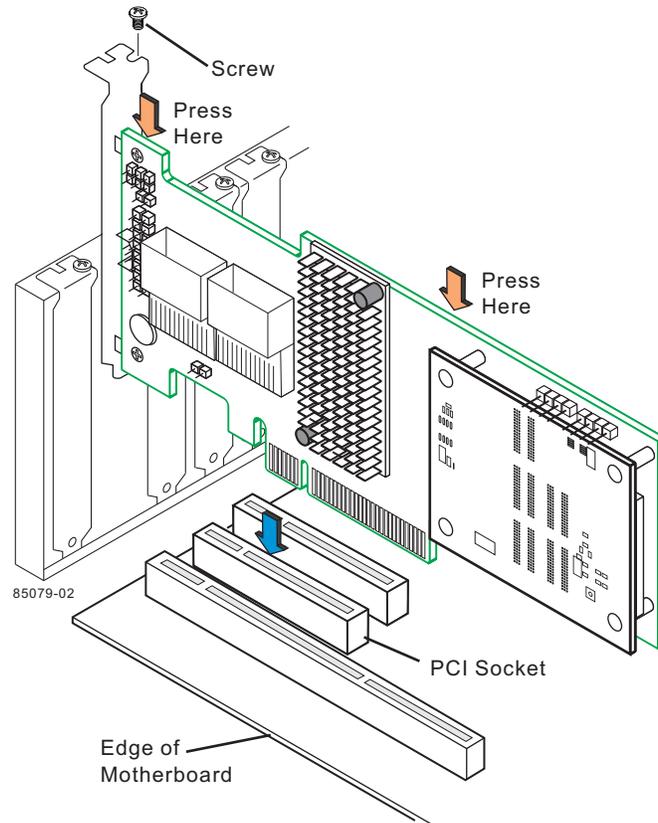


---

**NOTE:** Refer to the guide for your motherboard for information about the PCI Express slot.

---

**Figure 3: Installing the MegaRAID SAS 9265-8i RAID Controller**



#### 5. **Configure and Install the SAS Devices, SATA II Devices, or Both in the Host Computer Case**

Refer to the documentation for the devices for any preinstallation configuration requirements.

#### 6. **Connect the RAID Controller to the SAS Devices, SATA II Devices, or Both in the Host Computer Case**

Use SAS cables to connect the RAID controller to SAS devices, SATA II devices, or both. See [Figure 2](#) to view the connector locations.

---

**NOTE:** Refer to the **MegaRAID 6Gb/s SAS RAID Controllers User Guide** on the *MegaRAID Universal Software Suite* CD for detailed information about the SAS cables.

---

#### 7. **Turn on the Power to the Computer**

Reinstall the computer cover, and reconnect the power cords. Turn on the power to the computer. Make sure that the power is turned on to the SAS devices and the SATA II devices before or at the same time that the power to the host computer is turned on. If the power is turned on to the computer before it is turned on to the devices, the computer might not recognize the devices.

The firmware takes several seconds to initialize. During this time, the controller scans the ports.

## 8. Run the WebBIOS Configuration Utility

Run the WebBIOS Configuration Utility to configure the groups and the virtual drives. When the message `Press <Ctrl><H> for WebBIOS` appears on the screen, immediately press CTRL+H to run the utility.

---

**NOTE:** Refer to the **MegaRAID SAS Software User Guide** for detailed steps on configuring groups and virtual drives.

---

## 9. Install the Operating System Driver

The controller can operate under various operating systems, but you must install the software drivers first.

The *MegaRAID Universal Software Suite* CD includes the software drivers for the supported operating systems, along with documentation. You can view the supported operating systems and download the latest drivers for RAID controllers from the LSI web site at: <http://www.lsi.com/cm/DownloadSearch.do>. Access the download center, and follow the steps to download the driver.

Refer to the **MegaRAID SAS Device Driver Installation User Guide** on the *MegaRAID Universal Software Suite* CD for more information about installing the driver. Be sure to use the latest service packs that are provided by the operating system manufacturer and to review the `readme` file that accompanies the driver.

## Supported RAID Levels

---

This RAID controller supports drive groups using the following RAID levels:

- **RAID 0 (data striping):** Data is striped across all drives in the group, enabling very fast data throughput. There is no data redundancy. All data is lost if any drive fails.
- **RAID 1 (drive mirroring):** Data is written simultaneously to both drives in the drive group, providing complete data redundancy if one drive fails. RAID 1 supports an even number of drives from 2 to 32 in a single span.
- **RAID 5 (drive striping with distributed parity):** Data is striped across all drives in the group. Part of the capacity of each drive stores parity information that reconstructs data if a drive fails. RAID 5 provides good data throughput for applications with high read request rates.
- **RAID 6 (drive striping with distributed parity across two drives):** Data is striped across all drives in the group and two parity drives are used to provide protection against the failure of up to two drives. In each row of data blocks, two sets of parity data are stored.
- **RAID 00 (data striping across RAID 0 drive groups):** RAID 00 is a spanned drive group that creates a striped set from a series of RAID 0 drive groups.
- **RAID 10 (RAID 1 and RAID 0 in spanned groups):** RAID 10 uses mirrored pairs of drives to provide complete data redundancy. RAID 10 provides high data throughput rates.
- **RAID 50 (RAID 5 and RAID 0 in spanned groups):** RAID 50 uses both parity and drive striping across multiple drives to provide complete data redundancy. RAID 50 provides high data throughput rates.

- **RAID 60 (RAID 6 and RAID 0 in spanned groups):** RAID 60 uses both distributed parity across two parity drives and drive striping across multiple drives to provide complete data redundancy and high fault tolerance.

---

**NOTE:** Refer to the **MegaRAID SAS Software User Guide** on the *MegaRAID Universal Software Suite* CD for more information about RAID levels

---

## Technical Support

---

For assistance in installing, configuring, or running the MegaRAID SAS 9265-8i RAID controller, contact an LSI Technical Support representative.

Click the following link to access the LSI Technical Support page for storage and board support:

[http://www.lsi.com/support/storage/tech\\_support/index.html](http://www.lsi.com/support/storage/tech_support/index.html)

From this page, you can send an email or call Technical Support, or submit a new service request and view its status.

**Support Request:**

[http://www.lsi.com/support/support\\_form.html](http://www.lsi.com/support/support_form.html)

**Phone Support:**

[http://www.lsi.com/support/storage/phone\\_tech\\_support/index.html](http://www.lsi.com/support/storage/phone_tech_support/index.html)

1-800-633-4545 (North America)

00-800-5745-6442 (International)

---

**NOTE:** The international toll-free number does not require country-specific access codes.

---



