

BCM957508-P2100G

Dual-Port 100 Gb/s QSFP56 Ethernet PCI Express 4.0 x16 Network Interface Card

General Description

The Broadcom[®] BCM957508-P2100G is a dual-port 100 Gb/s PCI Express 4.0 x16 Network Interface Card that supports QSFP56/QSFP28/QSFP+ optical modules and copper direct-attach cables. The card uses the Broadcom BCM57508 200GbE MAC controller with an integrated dual-channel 100GbE SFI transceiver.

Features

- Dual-port pluggable media interface, which is compatible with QSFP56/QSFP28/QSFP+ optical transceiver or copper direct-attach cable.
- Industry's most secure PCIe adapter solution leveraging Broadcom's BroadSAFE[®] technology
- Supports Ethernet 50G PAM-4, 25G NRZ, and 10G NRZ signaling.
- Multi-Host Support: Dual-Host x8 mode¹.
- Fully compliant with the SFF-8402 standard.
- x16 PCI Express 4.0 compliant.
- SR-IOV with up to 1k virtual functions (VFs).
- Function-Level Reset (FLR) support.
- TruFlow[™] flow processing engine.
- Virtual Network Termination—VXLAN, NVGRE, Geneve, GRE encap/decap.
- vSwitch Acceleration.
- Tunnel-aware stateless offloads.
- DCB support PFC, ETS, QCN, DCBx.
- RDMA over Converged Ethernet (RoCE)
- Network Controller Sideband Interface (NC-SI)¹.
- SMBus 2.0.
- MCTP over SMBus.
- Jumbo frames up to 9 KB.
- Advanced congestion avoidance.
- Multiqueue, NetQueue, and VMQ.
- IPv4 and IPv6 offloads.
- TCP, UDP, and IP checksum offloads.
 - 1. Contact Broadcom for additional details.

- Large send offload (LSO).
- Large receive offload (LRO).
- TCP segmentation offload (TSO).
- Receive-side scaling (RSS).
- Transmit-side scaling (TSS).
- VLAN insertion/removal.
- Interrupt coalescing.
- Network boot—PXE, UEFI.
- iSCSI boot.
- MSI and MSI-X.
- FRU support.

Applications

Dual-port 100-Gigabit QSFP56 Ethernet Network Interface Card for data centers or cloud computing.

Figure 1: BCM957508-P2100G Network Interface Card



NOTE: The surface markings of the component and/or the labels may not reflect the received product. Broadcom reserves the right to change any component on the printed circuit board with the same functionality.

Table of Contents

1 Functional Description	4
1.1 Block Diagram	4
1.2 Host Interface Connector	5
1.3 BCM57508 Ethernet Controller	5
1.4 PCI Express Interface	5
1.5 SMBus Interface	5
1.6 Non-Volatile RAM	5
1.7 Heat Sink	5
1.8 Power Supplies	5
1.9 LED Functions and Locations	6
1.10 PCIe Plug-N-Play Identification	7
2 Board Power and Environmental Specifications	7
3 Package Weight	7
4 Physical Specifications	8
5 Regulatory and Safety Approvals	8
5.1 Regulatory	8
5.2 Safety	8
5.3 Electromagnetic Compatibility (EMC)	8
5.4 Electrostatic Discharge (ESD) Compliance	9
5.5 VCCI – Japan	9
5.6 Taiwan BSMI Compliance	9
5.7 FCC Statement	9
5.7.1 Information to User	9
6 Ordering Information	10
evision History	11


1 Functional Description

This section provides the functional description of the BCM957508-P2100G network interface card.

1.1 Block Diagram

Figure 2 shows the main functional blocks on the BCM957508-P2100G network interface card.

Figure 2: BCM957508-P2100G Block Diagram

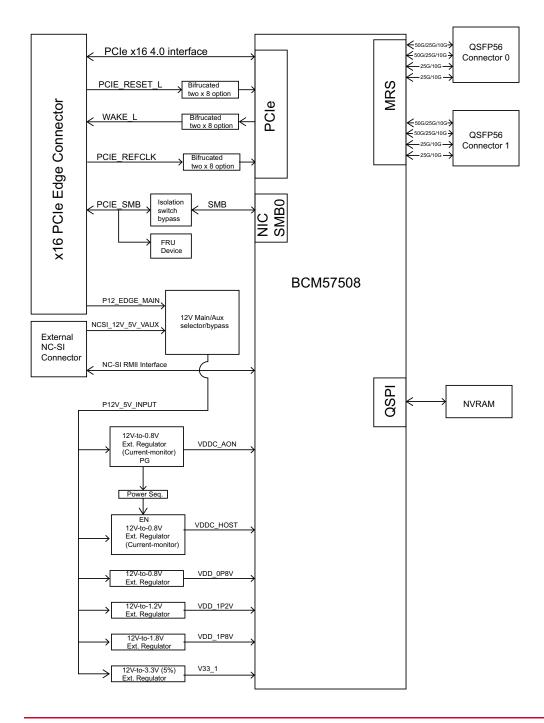

1.2 Host Interface Connector

The BCM957508-P2100G NIC is a PCI Express 4.0 x16 add-in card with standard-height bracket. The card edge connector complies with the PCI Express 4.0 x16 standard pinout for add-in cards.

1.3 BCM57508 Ethernet Controller

The BCM57508 Ethernet controller is configured as a dual-port 100 Gb/s interface to the line side and x16 PCI Express v4.0 interface to the system host.

1.4 PCI Express Interface

PCIe is a high-bandwidth serial bus providing a low pin-count interface as an alternative to parallel PCI. It is part of the host interface connector. The BCM57508 complies with the PCI Express Base Specification Revision 4.0, and supports a 16-lane PCIe 4.0 interface via the host interface connector.

1.5 SMBus Interface

The BCM57508 Ethernet Controller SMB0 interface supports serial communications between BCM57508 and the system. The interface allows the Ethernet controller to act as a SMBus primary or a secondary device.

1.6 Non-Volatile RAM

The BCM57508 Ethernet controller requires a non-volatile serial flash memory (NVRAM) to store the device firmware, PCI configuration space settings (for example, device ID, vendor ID), MAC address, and so on. After power-up, the firmware is downloaded into the device memory and executed by the on-chip processor.

1.7 Heat Sink

The passive heat sink is attached to the Ethernet controller using four spring-loaded push pins that are inserted into four mounting holes.


1.8 Power Supplies

All power is derived from the network adapter card host interface connector 12V and 3.3V supply which feeds the onboard regulators that provide the necessary power to the various components on the card. The network adapter card has six switching voltage regulators that power the card's VDDC AON, VDDC HOST, +0.8V, +1.2V, +1.8V, and +3.3V loads.

1.9 LED Functions and Locations

The QSFP56 port supports two LEDs to indicate traffic activities and link speed. The LEDs are visible through the cutout on the bracket as shown in Figure 3.

Figure 3: Activity and Link LED Locations

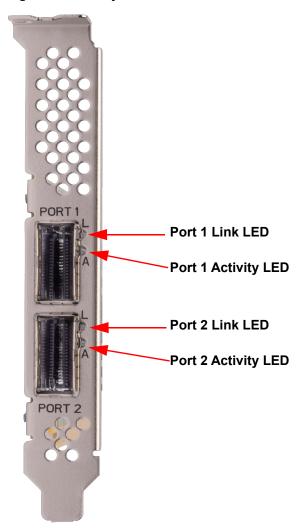

NOTE: The surface markings of the component and/or the labels may not reflect the received product. Broadcom reserves the right to change any component on the printed circuit board with the same functionality.

Table 1: LED Functions

LED Type	Color/Behavior	Note
Activity	Off	No Activity
	Green (blinking)	Link up (traffic flowing)
Link	Off	No Link
	Green	Linked at 100 Gb/s
	Amber	Linked at lower speed

1.10 PCIe Plug-N-Play Identification

Table 2 provides the PCIe PNP IDs for the adapter.

Table 2: PCIe PNP IDs

Field	Value
Vendor ID	0x14E4
Device ID	0x1750
Sub-Vendor ID	0x14E4
Sub-Device ID	0x2100

2 Board Power and Environmental Specifications

Table 3 provides the adapter power consumption.

Table 3: Adapter Power Consumption

Adapter Power ^a	Passive DAC Cable	Optical Transceiver ^b
Typical – 50% Ethernet traffic	16.0W	21.0W
Max – 100% Ethernet traffic	17.1W	22.0W

a. Power consumption of adapter at 55°C ambient temperature.

Table 4: Adapter Environmental Specifications

Airflow	Ambient Temperature	Passive DAC Cable	Optical Transceiver ^a
Hot Aisle	55°C	225 LFM	420 LFM
Storage Humidity	Relative Humidity Range (Non-condensing) maximum 90% at 35°C		
Storage Temperature	–40°C to 70°C		
Operating Temperature	0°C to 55°C		

a. Airflow requirements are measured using a Broadcom AFBR-89CDHZ (power class 3, commercial temp [70°C]) optical transceiver. Check the airflow requirements of the selected optical transceivers to ensure adequate cooling to the optical transceivers.

3 Package Weight

Table 5 shows the BCM957508-P2100G package weight with the standard-profile bracket installed by default (excluding the optical module).

Table 5: Package Weight

Parameter	Symbol	Value	Unit
BCM957508-P2100G weight	g	167	gram

b. Power consumption of adapter is measured using a Broadcom AFBR-89CDHZ power class 3 optical transceiver. The total adapter power may vary with different optical transceivers.

4 Physical Specifications

The BCM957508-P2100G board dimensions are 167.64 mm for the width and 68.91 mm for the height. The dimensions are in millimeters with a tolerance of ±0.127 millimeters.

5 Regulatory and Safety Approvals

The following sections detail the Regulatory, Safety, Electromagnetic Compatibility (EMC), and Electrostatic Discharge (ESD) standard compliance for the BCM957508-P2100G network interface card.

5.1 Regulatory

Table 6: Regulatory Approvals

Item	Applicable Standard	Approval (A)/Certificate (C)
CE/European Union	EN 62368-1:2014	CB report and certificate
UL/USA	IEC 62368-1 (ed. 2)	CB report and certificate

5.2 Safety

Table 7: Safety Approvals

Country	Certification Type/Standard	Compliance
International	CB Scheme ICES 003 – Digital Device	Yes
	UL 1977 (connector safety) UL 796 (PCB wiring safety) UL 94 (flammability of parts)	

5.3 Electromagnetic Compatibility (EMC)

Table 8: Electromagnetic Compatibility

Standard/Country	Certification Type	Compliance
CE/EU	EN 55032:2012/AC:2013 Class A EN 55024:2010 EN 61000-3-2:2014 EN 61000-3-3:2013	CE report and CE DoC
UKCA/UK	EN 55032:2012/AC:2013 Class A EN 55024:2010 EN 61000-3-2:2014 EN 61000-3-3:2013	CE report and UKCA DoC
FCC/USA	CFR47 Part 15 Subpart B Class A	FCC and EMC report.
IC/Canada	ICES-003 Class A	Report referencing IC standards.
ACA/Australia, New Zealand	AS/NZS CISPR 22:2009 +A1 :2010 Class A	ACA certificate
BSM/Taiwan	CNS 13438 (2006) Class A	BSMI certificate
BSMI/Taiwan	CNS 15663	BSMI certificate/RoHS table

Table 8: Electromagnetic Compatibility (Continued)

Standard/Country	Certification Type	Compliance
MSIP/S. Korea		Korea certificate MSIP mark
VCCI/Japan	VCCI V-3 (2015-04)	Copy of VCCI online certificate

5.4 Electrostatic Discharge (ESD) Compliance

Table 9: ESD Compliance Summary

Standard	Certification Type
EN55035 (EN 61000-4-2)	Air/Direct discharge

5.5 VCCI - Japan

この装置は、クラスA機器です。この装置を住宅環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。 VCCI - A

This is a Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures. VCCI—A.

5.6 Taiwan BSMI Compliance

警告:為避免電磁干擾,本產品不應安裝或使用於住宅環境。

Warning: To avoid electromagnetic interference, this product should not be installed or used in residential environments.

5.7 FCC Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- This device may not cause harmful interference.
- This device must accept any interference received, including interference that may cause undesired operation.

5.7.1 Information to User

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

6 Ordering Information

Table 10: Ordering Information

Part Number	Description
BCM957508-P2100G	Dual-Port 100 Gb/s QSFP56 Ethernet PCI Express 4.0 x16 Network Interface Card, Halogen Free

Revision History

957508-P2100G-DS108; November 3, 2025

Updated:

- Figure 1, BCM957508-P2100G Network Interface Card Replaced photo.
- Figure 3, Activity and Link LED Locations Replaced photo.

957508-P2100G-DS107; September 22, 2023

Updated:

- Features Added QSFP+ support.
- Figure 2, BCM957508-P2100G Block Diagram Added QSFP56 support.
- LED Functions and Locations Added 25G NRZ and 10G NRZ signaling support.

957508-P2100G-DS106; October 26, 2022

Updated:

- Figure 1, BCM957508-P2100G Network Interface Card Replaced figure.
- Figure 3, Activity and Link LED Locations Replaced figure.
- Figure 5, Standard-Profile Bracket Outline and Dimensions Replaced figure.
- Figure 6, Low-Profile Bracket Outline and Dimensions Replaced figure.

957508-P2100G-DS105; January 13, 2022

Updated:

Figure 1, LED Functions – Changed Link to Activity.

957508-P2100G-DS104; September 2, 2021

Updated:

■ Board Power and Environmental Specifications – Updated section.

957508-P2100G-DS103; December 27, 2019

Added:

■ Table 7, Required Airflow

957508-P2100G-DS102; November 1, 2019

Updated:

- Board Power Consumption Updated board power consumption value.
- Airflow Requirements Updated LFM value.

957508-P2100G-DS101; May 1, 2019

Updated:

- Figure 1, BCM957508-P2100G Network Interface Card
- Figure 3, Activity and Link LED Locations

957508-P2100G-DS100; April 12, 2019

Initial release.

Copyright © 2019 – 2025 Broadcom. All Rights Reserved. The term "Broadcom" refers to Broadcom Inc. and/or its subsidiaries. For more information, go to www.broadcom.com . All trademarks, trade names, service marks, and logos referenced herein belong to their respective companies.
Broadcom reserves the right to make changes without further notice to any products or data herein to improve reliability, function, or design. Information furnished by Broadcom is believed to be accurate and reliable. However, Broadcom does not assume any liability arising out of the application or use of this information, nor the application or use of any product or circuit described herein, neither does it convey any license under its patent rights nor the rights of others.
№ BROADCOM®