


# 3ware® SAS 9750-4i

## Four-Port 6Gb/s PCI Express® SATA+SAS RAID Controller Card

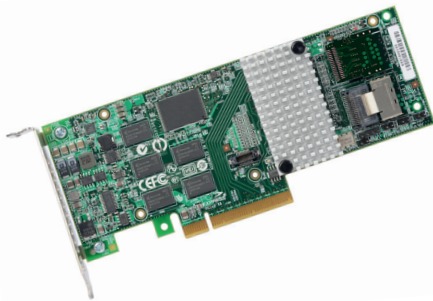

LSI 3ware SAS 9750-4i

### Key Features

- Four internal 6Gb/s SATA+SAS ports
- One Mini-SAS internal connector (SFF-087)
- RAID levels 0, 1, 5, 6, 10, 50 and Single Disk
- LSI SAS2108 6Gb/s RAID-on-Chip – 800MHz PowerPC®
- 512MB 800MHz DDRII cache memory
- Optional battery backup module with StorSave BBU
- Support for up to 96 SATA or SAS physical devices

### Key Advantages

- Superior Performance
  - Maximum RAID 5 Reads: 2500MB/s
  - Maximum RAID 5 Writes: 1100MB/s
- PCI Express 2.0 provides faster signaling for high- bandwidth applications
- Support for 3Gb/s and 6Gb/s, SAS and SATA, HDDs and SSDs
- StreamFusion+ improves multi-stream read and write performance

Unprecedented power in multi-stream RAID environments delivers high-performance and reliable data protection.

### Expand Your Horizon

LSI 3ware SATA+SAS RAID controllers provide a new level of reliability, availability, and performance to businesses that are facing storage challenges, particularly in sequential I/O intensive and multi-stream environments. This 3ware controller, great for inside-the-box connectivity, employs the latest in LSI RAID-on-Chip (ROC) technology and provides a higher standard of data protection and performance.

Offering data transfer rates of up to 6Gb/s per port, the latest generation of 3ware SATA+SAS controllers provide many new features while also ensuring investment protection for existing SATA and SAS implementations. LSI delivers unprecedented power in multi-stream RAID environments where performance, redundancy, and data protection are most important.

### 6Gb/s SAS Advantage

6Gb/s SAS is designed for backward compatibility with 3Gb/s SAS as well as with 3Gb/s SATA drives. In addition, 6Gb/s 3ware controllers deliver significant performance improvements in both read and write applications regardless of drive speed. StorSave™ strengthens array performance during peak usage by allowing the controller to use both controller cache and disk cache for RAID operations. Other new features of the 6Gb/s 3ware SATA+SAS controller cards include greater signal integrity using Decision Feedback Equalization, support for more sophisticated SAS topologies using Expander Self-discovery/Self-configuration, and additional safeguards to enhance data protection.

### StreamFusion™+ Performance

3ware's advanced algorithms allow for optimized reads and writes in multi-stream environments. StreamFusion+ enables higher throughput even in degraded modes to deliver a superior standard of data protection and to boost performance. It is the result of countless hours of engineering aimed at delivering breakthroughs in high-load applications and providing enhanced features and functionality in all environments. Focusing on the latest technology trends and customer requirements, StreamFusion+ firmware reaffirms our commitment to customer success and industry leadership.

### Typical Applications

- Video-On-Demand
- Video-Surveillance
- Video Creation + Editing
- Medical Imaging
- High-Performance Computing
- Web hosting
- Digital Content Archive and VTL
- Storage Appliance
- File, Web, Database, and Email Servers

### Remote Creation, Management and Monitoring with 3DM<sup>®</sup>2

3DM2 is powerful remote management software that simplifies the configuration, management and monitoring of 3ware storage arrays. 3DM2 provides an intuitive interface to remotely create, manage and monitor your 3ware RAID arrays and single disks in a robust, secure array management environment for your RAID protected data. Proven self-monitoring technologies and automatic notification services can maximize your storage availability while minimizing the pressure on system administrators.

### 3ware SAS 9750-4i Controller Card

Solution Provided	Four-port internal SATA+SAS solution for high-density servers and workstations using up to 96 drives with the flexibility to use both SATA and SAS hard drives and solid state drives (SSDs)	
Physical Dimensions	Low profile (6.6" X 2.536")	
Connectors	One Mini-SAS SFF-8087 internal connector	
Device Support	Up to 96 SATA and/or SAS hard drives and SSDs	
Host Bus Type	x8 lane PCI Express 2.0 Compliant	
Data Transfer Rates	Up to 6Gb/s per port	
I/O Processor/SAS Controller	LSISAS2108 RAID-on-Chip (ROC)	
Cache Memory	512MB 800MHz DDR II SDRAM	
Battery Backup Unit	LSiBBU07, an intelligent battery backup module option that directly connects to the controller	
Key RAID Data Protection Features	<ul style="list-style-type: none"> <li>▪ RAID levels 0, 1, 5, 6,10, 50 and Single Disk</li> <li>▪ Rapid RAID Recovery</li> <li>▪ StreamFusion+</li> <li>▪ Online Capacity Expansion (OCE)</li> <li>▪ Online RAID Level Migration (RLM)</li> <li>▪ Auto resume after loss of system power during array rebuild or reconstruction</li> <li>▪ Single controller Multipathing (failover)</li> <li>▪ Load Balancing</li> <li>▪ Variable stripe size support</li> <li>▪ Fast initialization for quick array setup</li> <li>▪ Background Task Activity Policies</li> <li>▪ Multiple logical unit sizes and RAID levels on one card</li> <li>▪ Bootable array support for greater fault tolerance of your OS</li> </ul>	<ul style="list-style-type: none"> <li>▪ SMTP support for email notification</li> <li>▪ SNMP support</li> <li>▪ Emergency Flash Recovery protects against failed firmware upgrade</li> <li>▪ Up to 32 active units support</li> <li>▪ Up to 32 drives per unit support</li> <li>▪ Support for greater than 2TB volumes</li> <li>▪ S.M.A.R.T support</li> <li>▪ Staggered drive spin-up support</li> <li>▪ Drive insertion and removal notification</li> <li>▪ Global Hot Spare <ul style="list-style-type: none"> <li>– Automatic rebuild • Enclosure management for ES 2.0 via I2C or in-band signaling</li> </ul> </li> <li>▪ Optional Battery Backup with StorSave BBU</li> </ul>
Operating Temperature	Maximum ambient: 60°C (44.5°C w/iBBU)	
Operating Voltage	+3.3V	
Warranty	3 years, free advanced technical support, advanced replacement option	
Regulatory Certifications	EN55022, EN55024, EN60950, EN 61000-3-2, EN 61000-3-3; FCC Class A, Class B; UL1950; UL; CSA C22.2; VCCI; RRL for MIC; BSMI; C-tick	

RAID Management	3ware® Disk Manager 2 (3DM®2) Command Line Utility (CLI) 3ware BIOS Manager (3BM) SNMP support
OS Support	Extensive support includes Microsoft® Windows Vista®, Windows 7®, Windows Server® 2003/2008, Red Hat Linux®, SuSE Linux®, Fedora Core Linux®, FreeBSD®, and more. Visit the LSI download center for the most complete list of supported operating systems: <a href="http://lsi.com/support">lsi.com/support</a>
Ordering Information	3ware SAS 9750-4i Single Pack P/N: LSI00216; 3ware SAS 9750-4i Kit P/N: LSI00215



For more information and sales office locations, please visit the LSI website at: [www.lsi.com](http://www.lsi.com)

**North American Headquarters**  
San Jose, CA  
T: +1.866.574.5741 (within U.S.)  
T: +1.408.954.3108 (outside U.S.)

**LSI Europe Ltd.  
European Headquarters**  
United Kingdom  
T: [+44] 1344.413200

**LSI KK Headquarters**  
Tokyo, Japan  
T: [+81] 3.5463.7165

LSI, the LSI & Design logo, and the Storage.Networking.Accelerated. tagline are trademarks or registered trademarks of LSI Corporation. All other brand or product names may be trademarks or registered trademarks of their respective companies.

LSI Corporation reserves the right to make changes to any products and services herein at any time without notice. LSI does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by LSI; nor does the purchase, lease, or use of a product or service from LSI convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual property rights of LSI or of third parties.

Copyright ©2013 by LSI Corporation. All rights reserved. > 1213